


MINIATURE RELAY

1 POLE—1 to 2 A (FOR SIGNAL SWITCHING)

FBR20 SERIES

■ FEATURES

- Microminiature size
Two FBR20 Series relays can be mounted in the space required for a single FBR210 Series relay.
- 2 A carrying current
- Strong shock resistance
Even with 500 m/s² shock, FBR20 Series relays never miss an operation.
- Easy pattern design
Separate location of coil (coil) and output (contact) terminals allows easy PCB pattern design.
- Formed terminals for temporary mounting
The uniquely designed terminals allow FBR20 Series relays to be mounted temporarily on PCBs.
- Conforms to FCC68.302 (high dielectric strength type)
- UL recognized (File No. E63615)
- Tube packaging

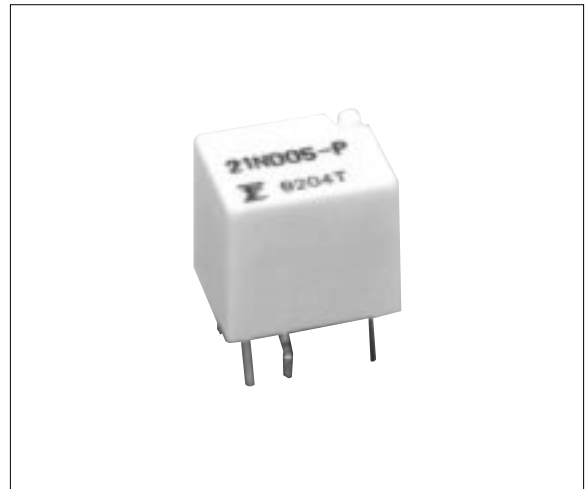

■ ORDERING INFORMATION

[Example] FBR21 N D12 U - P (-02)
 (a) (b) (c) (d) (e) (f)

(a)	Series Name (Contact Style)	FBR21: FBR20 Series (single contact) FBR22: FBR20 Series (bifurcated contact)
(b)	Enclosure	Nil: Flux free type N: Plastic sealed type
(c)	Nominal Voltage	(Example) D03: 3 VDC D05: 5 VDC D12: 12 VDC (refer to the COIL DATA CHART)
(d)	UL Standard	Nil: Standard U: UL114 recognized
(e)	Contact Material	P: Gold-overlay silver-palladium
(f)	Special Type	Nil: Standard 02: High dielectric strength type (1,000 VAC)

Note: The designation name is stamped on the top of the relay case as follows:

(Example) Designation ordered: FBR21D05-P
Stamp: 21D05-P

FBR20 SERIES

■ SAFETY STANDARD AND FILE NUMBERS

UL114 (File No. E63615)

Nominal voltage	Contact rating
1.5 to 24 VDC	1 A 24 VDC resistive 0.5 A 30 VAC resistive

■ SPECIFICATIONS

Item		Single contact type	Bifurcated contact type	
Contact	Arrangement	1 form C (SPDT)		
	Material	Gold-overlay silver-palladium		
	Resistance (initial)	Maximum 100 mΩ (at 0.1 A 6 VDC)		
	Rating (resistive)	0.5 A 120 VAC or 1 A 24 VDC (resistive load)		
	Maximum Carrying Current	2 A		
	Maximum Switching Power	60 VA or 24 W		
	Maximum Switching Voltage*1	125 V		
	Maximum Switching Current	1 A		
	Minimum Switching Load*2 (reference)	Plastic sealed 1 mA 1V Flux free 1 mA 5V	Plastic sealed 0.1V 100μA Flux free 1V, 1mA	
	Capacitance (reference)	Approximately 2 pF (between coil and contacts) Approximately 1 pF (between open contacts)		
Coil	Nominal Power (at 20°C)	Approximately 0.3 W		
	Operate Power (at 20°C)	Approximately 0.192 W maximum		
	Operating Temperature	-30°C to +65°C (no frost) (refer to the CHARACTERISTIC DATA)		
	Operating Humidity	45 to 85%RH		
Time Value	Operate (at nominal voltage)	Maximum 5 ms		
	Release (at nominal voltage)	Maximum 2 ms		
Insulation	Resistance (initial)	Minimum 100 MΩ (at 500 VDC)		
	Dielectric Strength	Between coil and contacts	500 VAC for 1 minute (standard) 1,000 VAC for 1 minute (high dielectric strength type)	
		Between open contacts	500 VAC 1 minute	
Surge Strength (high dielectric strength)	1,500 V (10 × 700 μs) (between coil and contacts)			
Life	Mechanical	5 × 10 ⁶ operations minimum		
	Electrical (refer to the REFERENCE DATA)	2 × 10 ⁵ operations minimum (at contact rating)		
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 3.0 mm)		
	Shock Resistance	Misoperation	500 m/s ² (11±1 ms)	
		Endurance	1,000 m/s ² (11±1 ms)	
Weight	Approximately 1.7 g			

*1 If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

*2 Values when switching a resistive load at normal room temperature and humidity, and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

FBR20 SERIES


COIL DATA CHART

MODEL				Nominal voltage	Coil resistance $\pm 10\%$	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Maximum allowable voltage	Nominal power	Coil temperature rise
Single contact type		Bifurcated contact type									
Flux free	Plastic sealed	Flux free	Plastic sealed								
FBR21D01-P	FBR21ND01-P	FBR22D01-P	FBR22ND01-P	1.5 VDC	7.5 W	200 mA	80% max. of nominal voltage	5% min. of nominal voltage	160% of nominal voltage	Approx. 300 mW (at nominal voltage)	Approx. 45 deg (at nominal voltage)
FBR21D03-P	FBR21ND03-P	FBR22D03-P	FBR22ND03-P	3 VDC	30 W	100 mA					
FBR21D05-P	FBR21ND05-P	FBR22D05-P	FBR22ND05-P	5 VDC	83 W	60 mA					
FBR21D06-P	FBR21ND06-P	FBR22D06-P	FBR22ND06-P	6 VDC	120 W	50 mA					
FBR21D09-P	FBR21ND09-P	FBR22D09-P	FBR22ND09-P	9 VDC	270 W	33 mA					
FBR21D12-P	FBR21ND12-P	FBR22D12-P	FBR22ND12-P	12 VDC	480 W	25 mA					
FBR21D18-P	FBR21ND18-P	FBR22D18-P	FBR22ND18-P	18 VDC	1,080 W	17 mA					
FBR21D24-P	FBR21ND24-P	FBR22D24-P	FBR22ND24-P	24 VDC	1,920 W	12.5 mA					


Note: All values in the table are measured at 20°C.

CHARACTERISTIC DATA


Range of operation temperature and voltage

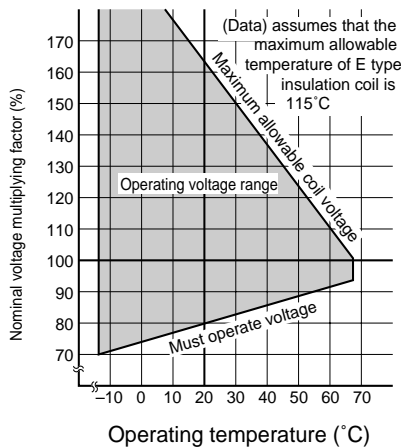

Maximum switching capacity

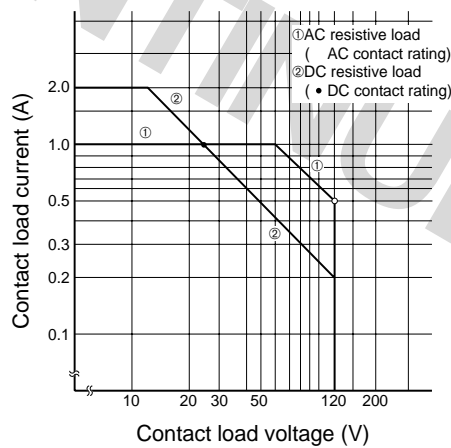


Life curve

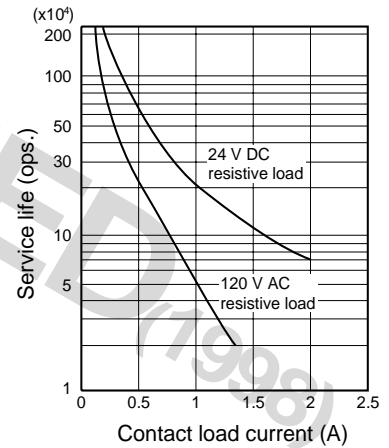


REFERENCE DATA


Distribution of operate and release voltage

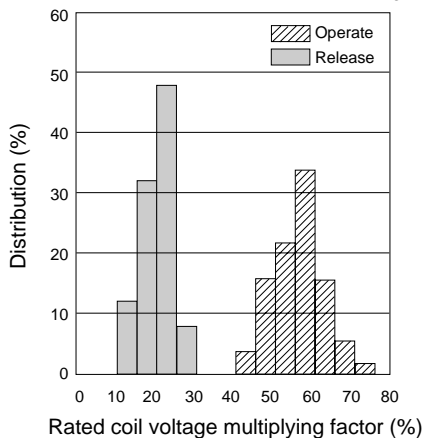

Distribution of operate and release time

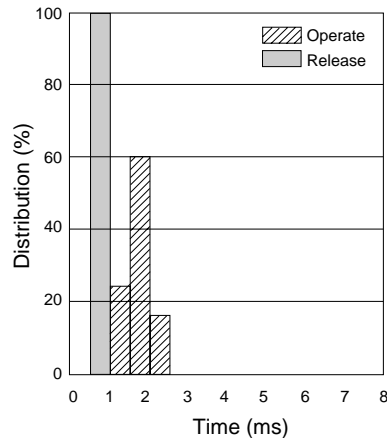


Distribution of contact resistance

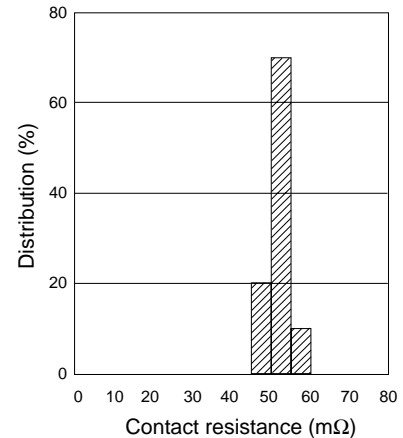


FBR20 SERIES

■ DIMENSIONS


●Dimensions

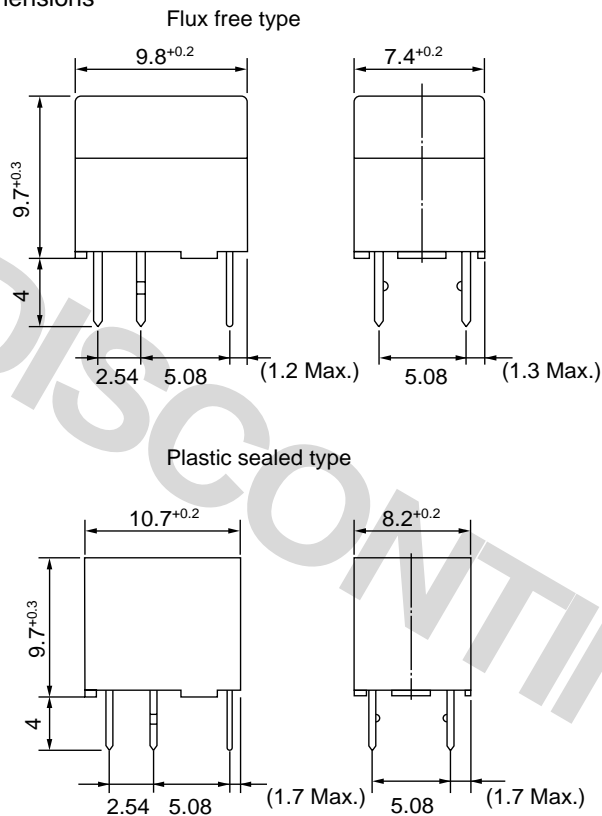


●PC board mounting hole layout (BOTTOM VIEW)



●Schematics (BOTTOM VIEW)



●Tube carrier

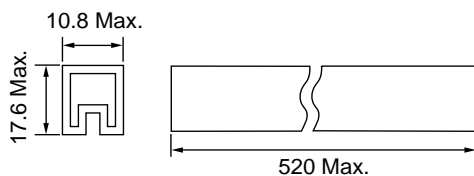

Flux free type:50pcs/Tube
 Plastic sealed type:40pcs/Tube

Unit: mm

Fujitsu Components International Headquarter Offices

Japan
 Fujitsu Component Limited
 Gotanda-Chuo Building
 3-5, Higashigotanda 2-chome, Shinagawa-ku
 Tokyo 141, Japan
 Tel: (81-3) 5449-7010
 Fax: (81-3) 5449-2626
 Email: promothq@ft.ed.fujitsu.com
 Web: www.fcl.fujitsu.com

North and South America
 Fujitsu Components America, Inc.
 250 E. Caribbean Drive
 Sunnyvale, CA 94089 U.S.A.
 Tel: (1-408) 745-4900
 Fax: (1-408) 745-4970
 Email: marcom@fcai.fujitsu.com
 Web: www.fcai.fujitsu.com

Europe
 Fujitsu Components Europe B.V.
 Diamantlaan 25
 2132 WV Hoofddorp
 Netherlands
 Tel: (31-23) 5560910
 Fax: (31-23) 5560950
 Email: info.marketing@fceu.fujitsu.com
 Web: www.fceu.fujitsu.com

Asia Pacific
 Fujitsu Components Asia Ltd.
 102E Pasir Panjang Road
 #04-01 Citilink Warehouse Complex
 Singapore 118529
 Tel: (65) 375-8560
 Fax: (65) 273-3021
 Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com