

FUJITSU Component Wireless Modules

Bluetooth[®] Version 5.3 without Firmware

FWM7BLZ23-109172

Overview

Compact Bluetooth Version 5.3 (low energy single mode) module with antenna, without Fujitsu Component firmware. It is possible to communicate in 2.4 GHz Industrial Scientific Medical (ISM) band.



RoHS compliant

Features

- **Replaceable with FWM7BLZ20/20B**
Same size and footprint as FWM7BLZ20/20B. It is possible to use an appropriate module according to required performance
- **Increased memory**
256KB RAM and 1MB Flash memory
QSPI for the high-speed external memory interface
- **Long Range communication**
Coded PHY (Long Range) enables approx. 4 times (theoretical value) long-distance communication compared to conventional products.
- **High output**
High power output (+8 dBm) also contributes long range communication.
- **30 GPIO pins of nRF52840-QFAA are assigned**
Possible to use pins as NFC*, SPI, TWI, URAT, ADC, QSPI
Note*: external antenna is required to use NFC



FWM7BLZ23-109172

Applications


IoT equipment, remote control and maintenance of equipment, etc.

■ Specifications

Item	Specifications
Part number	FWM7BLZ23 -109172
Antenna	Embedded (Pattern antenna)
Bluetooth technology	Conforms to Bluetooth Core Specification Version 5.3 technology (Low energy single mode)
Carrier frequency	2,402 MHz to 2,480 MHz
Modulation	GFSK
RAM	256 KB
FLASH	1,024 KB
Transmit power	+8 dBm max.
Receiver sensitivity	-94 dBm typical (1 Mbps BLE ideal transmitter packet length, ≥128 bytes BER=0.01%)
Interface	NFC*1, SPI, TWI, UART, ADC, QSPI
Crystal oscillator	Embedded
Operating voltage	1.7 to 3.6 VDC
Data rate	1 Mbps / 2 Mbps (ON-AIR)
Number of channels	40 RF channels
Advertising size	255 bytes (payload), max. 254 bytes (advertising data)
SoC	nRF52840 (Nordic Semiconductor)
Power consumption	Tx only LDO mode: 10.6 mA typical (at 0 dBm), DC/DC mode: 4.8 mA typical (at 0 dBm)
	Rx only LDO mode: 9.9 mA typical (data rate 1 Mbps), 11.1 mA typical (data rate 2 Mbps) DC/DC mode: 4.6 mA typical (data rate 1 Mbps), 5.2 mA typical (data rate 2 Mbps)
Operating temperature	-40°C to +85°C
Dimensions	15.7 x 9.8 x 1.7 mm
Mounting method	Surface mount (SMT)
Certifications (plan)	Bluetooth qualification (QDID)*2, Radio Act (Japan), FCC, ISED, CE, UKCA

Note: *1: External antenna is required to use NFC
 *2: Bluetooth SIG registration is required to use modules QDID

■ Dimensions

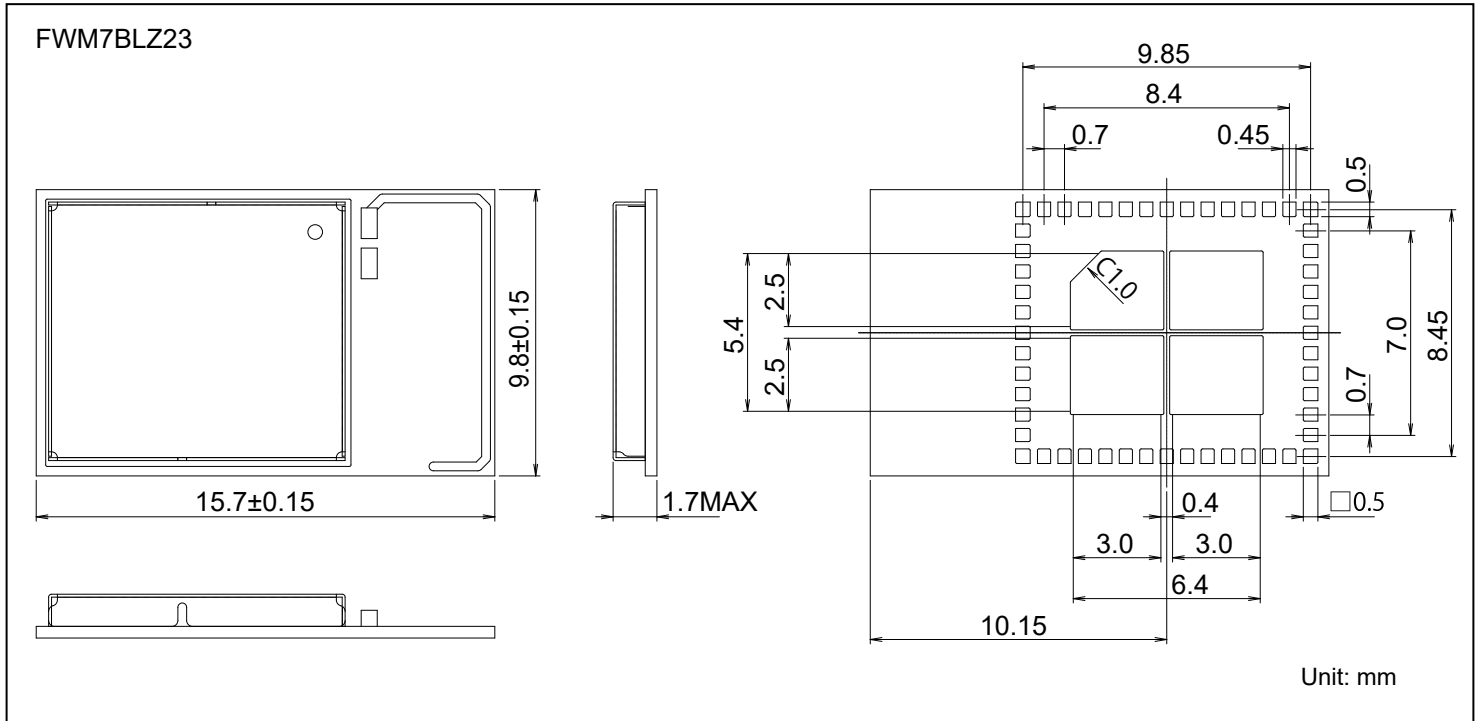

■ Evaluation board

Part number	Details
MBH-FUJ12-E1	Evaluation board (USB cable is attached)
FWM7BLZ23-DAU-EB1	Daughter board (FWM7BLZ23 x 1 is mounted)

Note: The *Bluetooth*™ word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Fujitsu Component is under license. Other trademarks and trade names are those of their respective owners.

Contact

<p>Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 12-4, Higashi-shinagawa 4-chome, Tokyo 140 0002, Japan Tel: +81 3 3450 1682 Email: fcl-contact@cs.fcl-components.com</p>	<p>Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: +31 23 5560910 Email: info@fcl-components.eu</p>	<p>China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Room 4306, BM Intercontinental Business Center, 100 Yutong Rd, Shanghai 200070, China Tel: +86 21 3253 0998 Email: fcsh@fcl-components.com</p>
<p>North and South America FUJITSU COMPONENTS AMERICA, INC. 350 Cobalt Way, M/s 160 Sunnyvale, CA 94085 U.S.A. Tel: +1 408 745 4900 Email: fcai.components@fcl-components.com</p>	<p>Asia Pacific FUJITSU COMPONENTS ASIA, Ltd. No. 20 Harbour Drive, #07-01B Singapore 117612 Tel: +65 6375 8560 Email: fcal@fcl-components.com</p>	<p>Hong Kong FUJITSU COMPONENTS HONG KONG Co., Ltd. Room 13, 23/F, Seapower Tower, Concordia Plaza, No.1 Science Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong Tel: +852 2881 8495 Email: fcsh@fcl-components.com</p>

Web: www.fcl.fujitsu.com/en/

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.

Copyright ©2023 Fujitsu Components America, Inc. All rights reserved. Revised April 19, 2023.