


# MEMORY CARD CONNECTORS (PCMCIA CONFORMABLE) SURFACE MOUNT

## 560H SERIES - LIGHTWEIGHT

### ■ FEATURES

- The connectors conform to the Japan Electronic Industry Development Association (JEIDA) and Personal Computer Memory Card International Association (PCMCIA) standards Ver. 4.
- Contact pitch of 1.27 mm (0.050 in.) x 1.27 mm (0.050 in.). Incorrect insertion is prevented. Hot system plugging is possible (contact detection).
- Plugs have an easy-to-use ejection mechanism.
- Raised mounting type connectors (under which components can be mounted) and low-profile connectors are available.
- In addition to connectors for type I and type II cards, a connector for type III cards has been provided.
- The sockets are of the SMT type. A straddle-type socket for double-sided mounting and a socket for single-sided mounting are available.

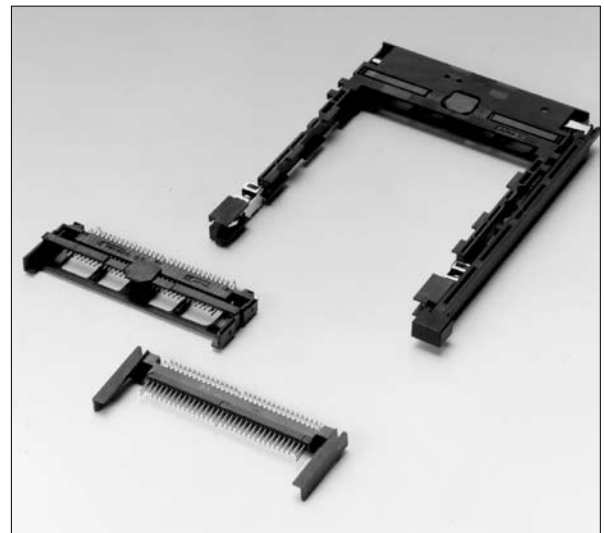

### ■ SPECIFICATIONS

Item	Specification
Operating temperature range	-55°C to +85°C
Current rating	DC 0.5 A
Voltage rating	AC 250 V
Contact resistance	40 mΩ max (6 VDC, 0.1 A)
Insulation resistance	1000 MΩ min. (500 VDC)
Dielectric withstanding voltage	500 VAC for 1 minute
Insertion/withdrawal life	Industrial environment: 5,000 times Office environment: 10,000 times

### ■ PIN CONNECTOR (PLUG) CONTACT LENGTH

Contact type	Pin No.	Contact length
Power, ground pins	1, 17, 34, 35, 51, 68	5.0 mm (0.196 in.)
Card detection pins	36, 67	3.5 mm (0.137 in.)
Other signal pins	Others	4.25 mm (0.167 in.)


### ■ MATERIALS

Item	Specification
Insulating material	Plug body: PPS resin UL94V-0 : 6T nylon (for type III card connector) UL94V-0 Ejector: Polyester : PPS resin (for SMT and type III card connectors)
Conductor	Copper alloy
Plating	Contact: Gold over palladium over nickel (PAGOS) Terminal: Palladium

# 560H Series Connector Conforming to Ver. 4


## ■ ORDERING PART NUMBER [PLUG]

FCN-56 5 P 068-G / XC-V4

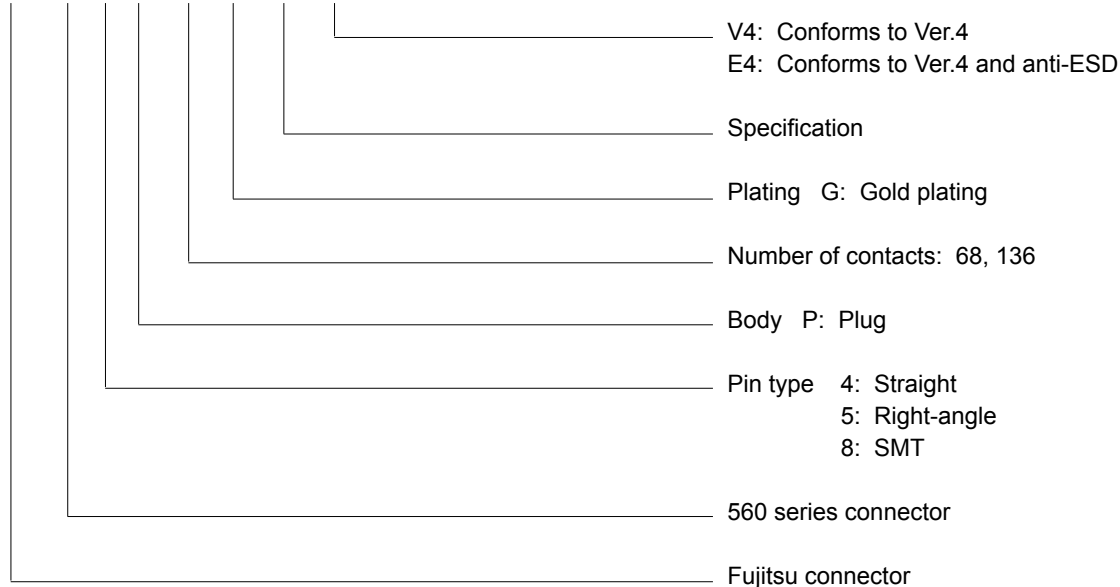

## ■ ORDERING PART NUMBER [SOCKET]


FCN-56 8 J 068-G / 0

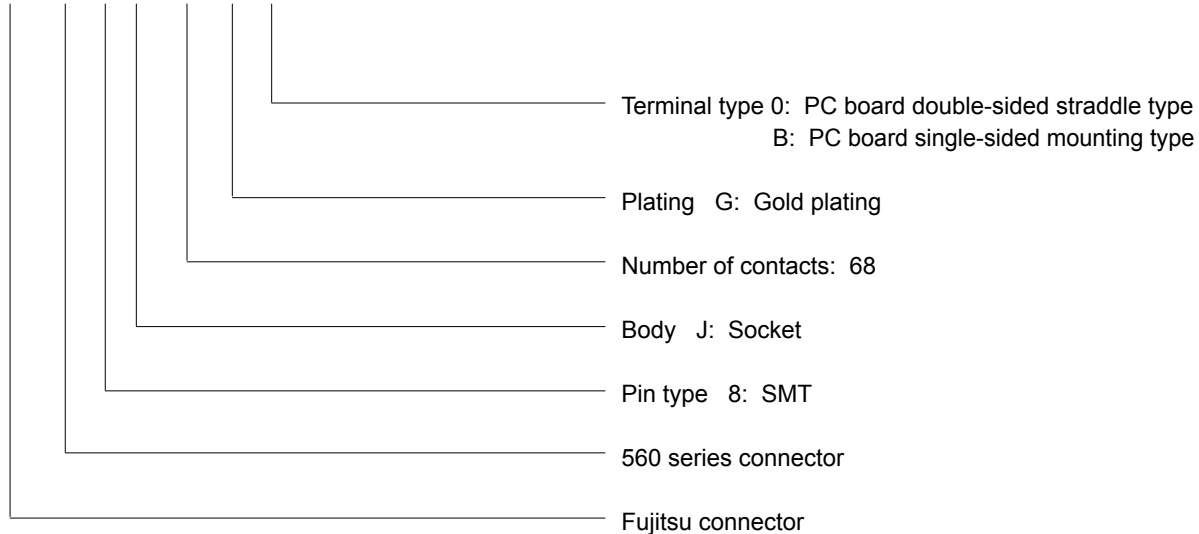


# 560H Series Connector Conforming to Ver. 4

TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH RIGHT-BUTTON EJECTOR, WITH FG CLIP)

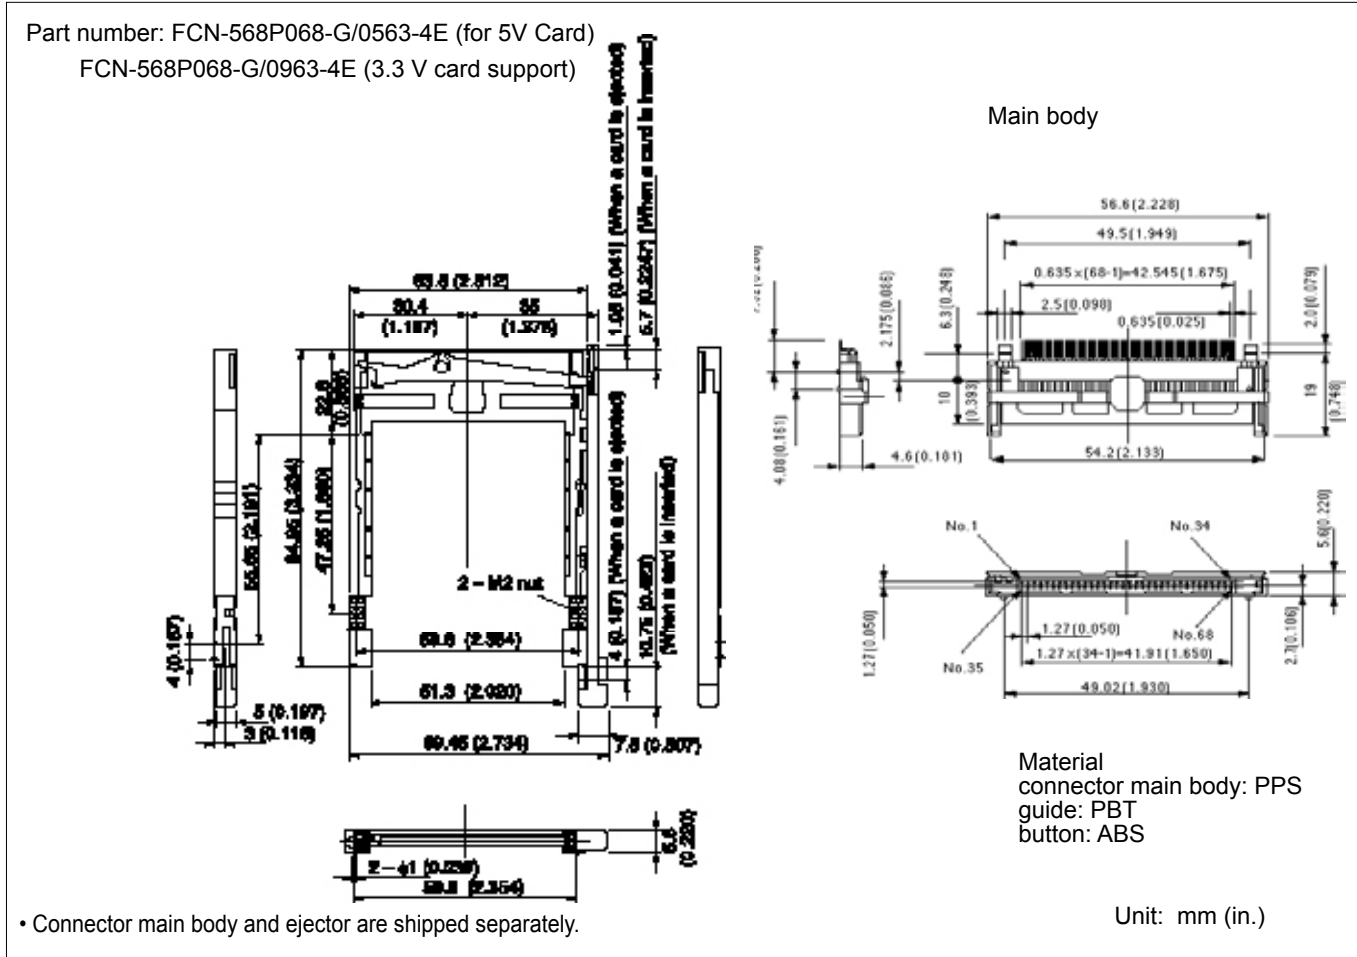

## ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

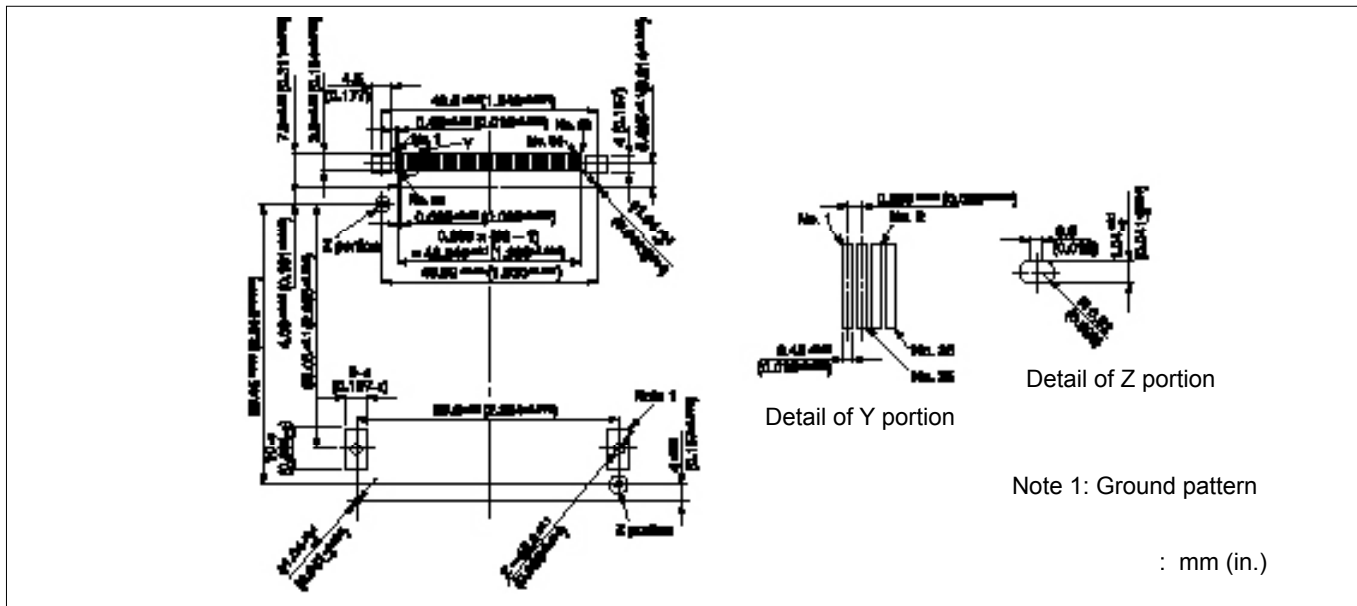


# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

### RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH LEFT-BUTTON EJECTOR, WITH FG CLIP)

#### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0564-4E (for 5V card)  
 FCN-568P068-G/0964-4E (3.3V card support)

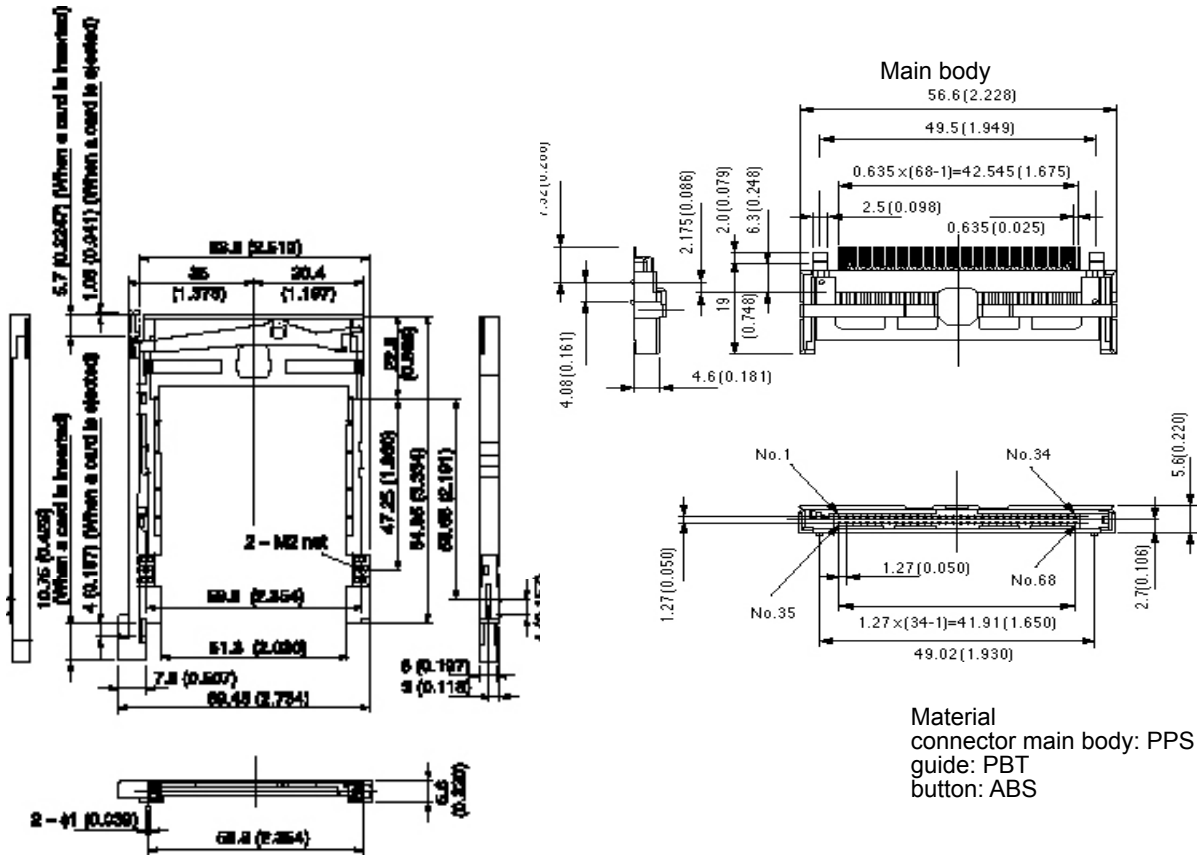


Material  
 connector main body: PPS  
 guide: PBT  
 button: ABS

• Connector main body and ejector are shipped separately.

Unit: mm (in.)

#### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

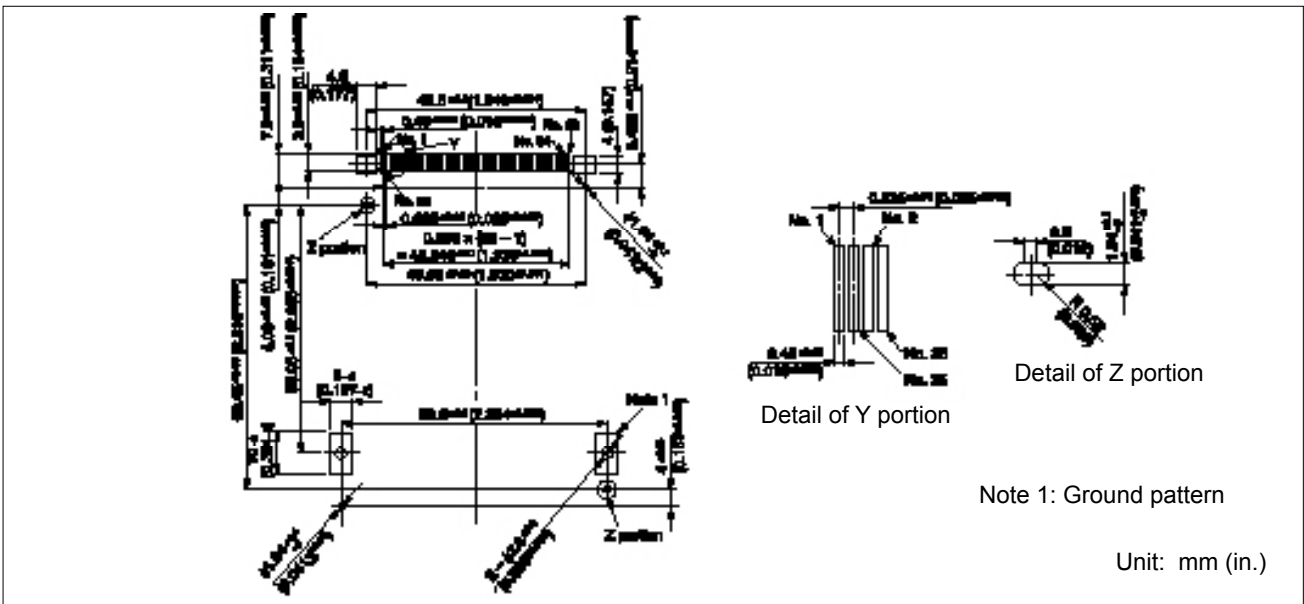

Unit: mm (in.)



# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH RIGHT-BUTTON EJECTOR, WITH FG CLIP, TO BE MOUNTED ON BACK OF PC BOARD)

### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0663-4E (for 5V card)  
FCN-ε

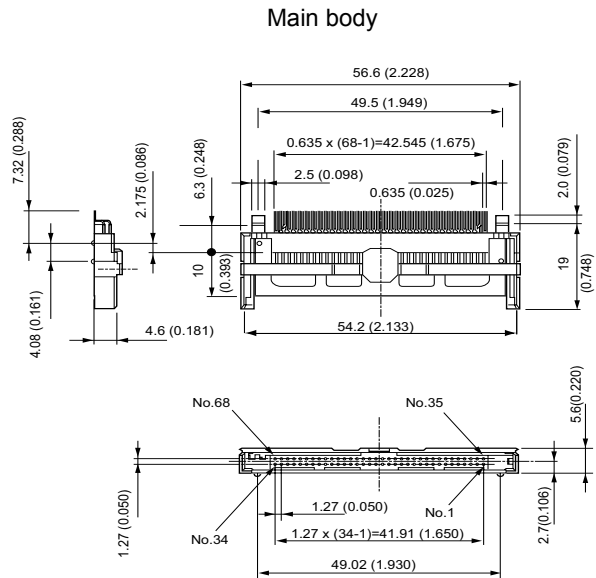
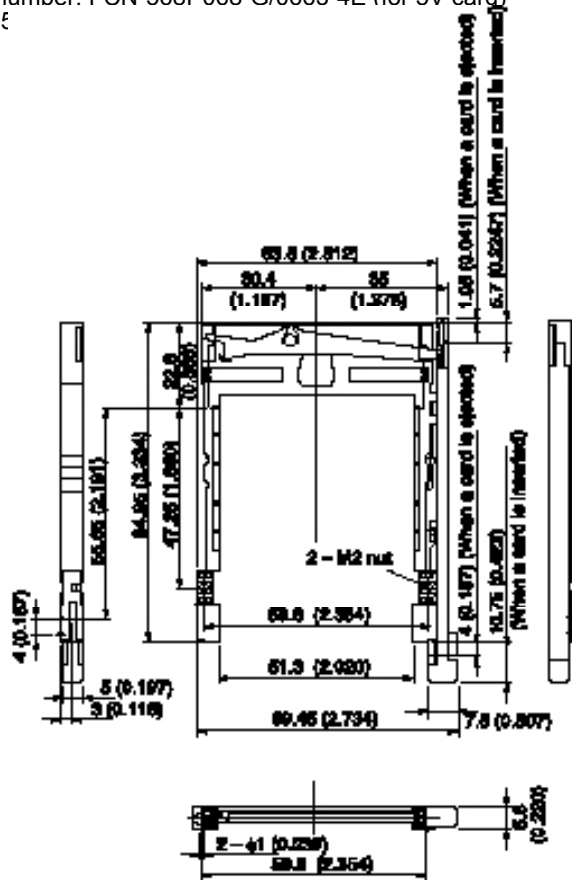


Material  
connector main body: PPS  
guide: PBT  
button: ABS

• Connector main body and ejector are shipped separately.

Unit: mm (in.)

### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

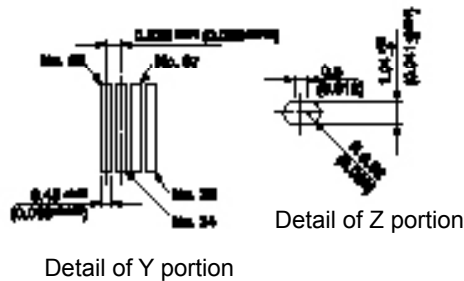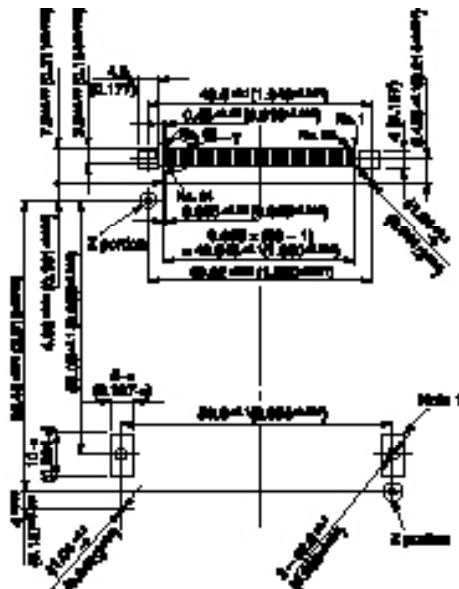

Detail of Z portion

Detail of Y portion

Note 1: Ground pattern



Unit: mm (in.)

# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT (WITH LEFT-BUTTON EJECTOR, WITH FG CLIP, TO BE MOUNTED ON BACK IF PC BOARD)

Part number: FCN-568P068-G/0664-4E (for 5V card)  
 FCN-568-P068-G/1064-4E (3.3V card support)

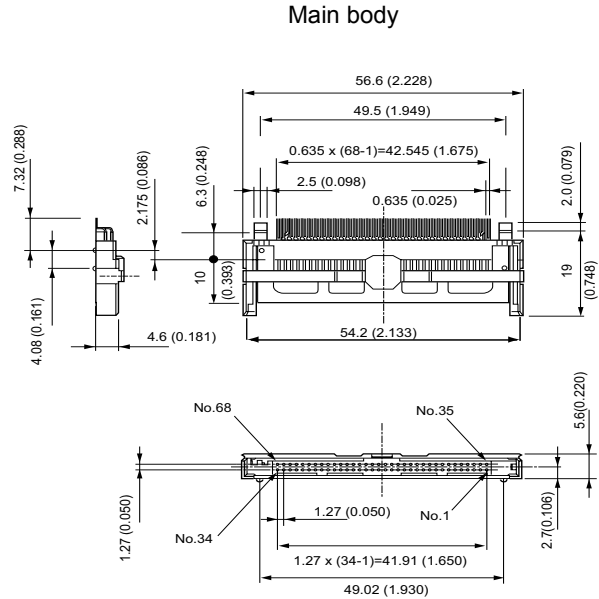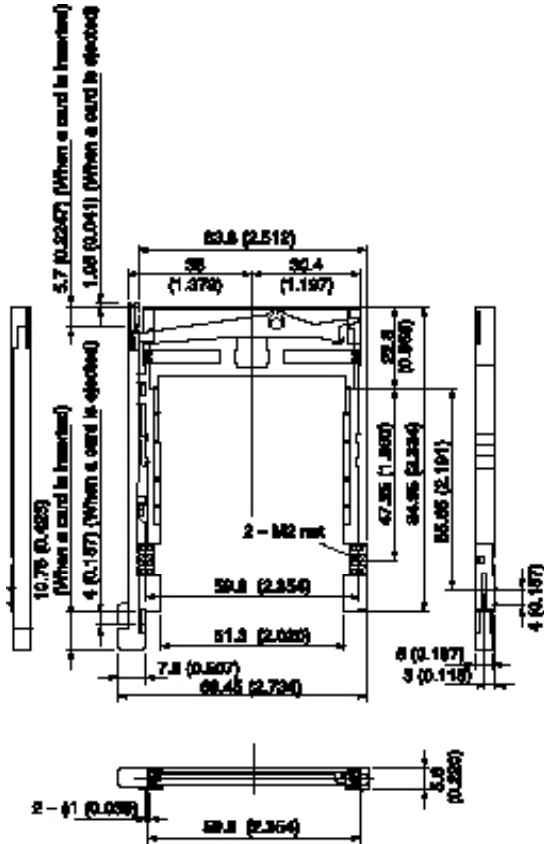


Material  
 connector main body: PPS  
 guide: PBT  
 button: ABS

• Connector main body and ejector are shipped separately.

Unit: mm (in.)

## ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

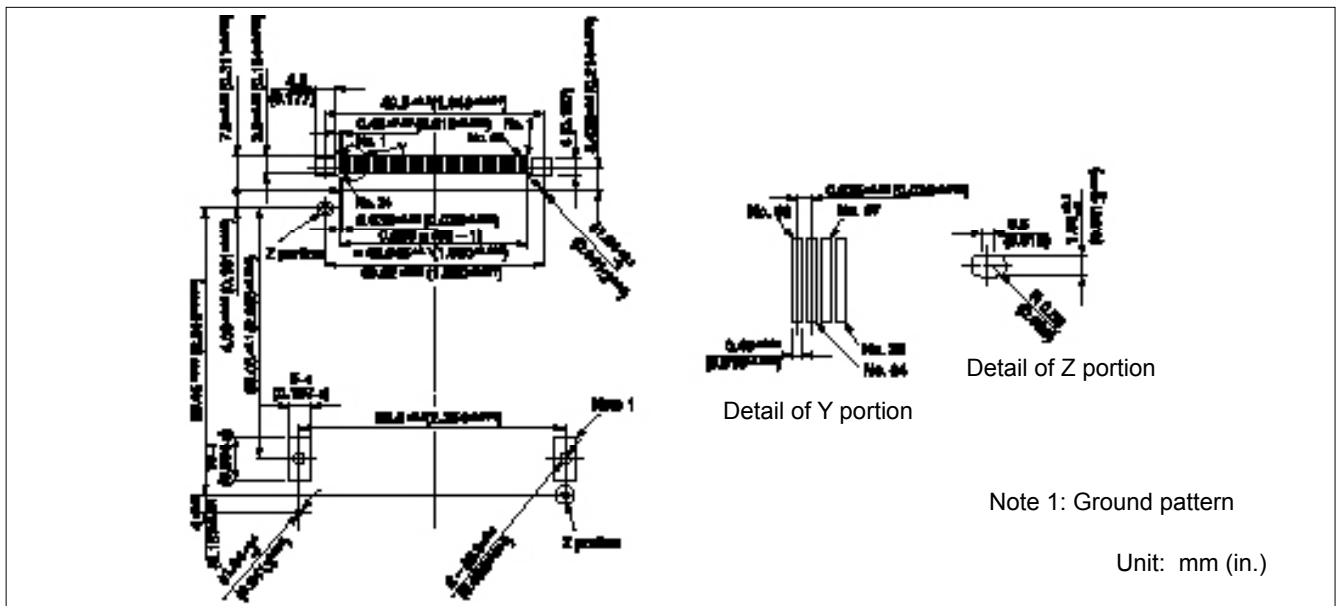



# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH RIGHT -BUTTON EJECTOR, 2 mm RAISED TYPE, WITH FG CLIP)

### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0770-4E (for 5V card)  
Part number: FCN-568P068-G/1170-4E (3.3V card support)


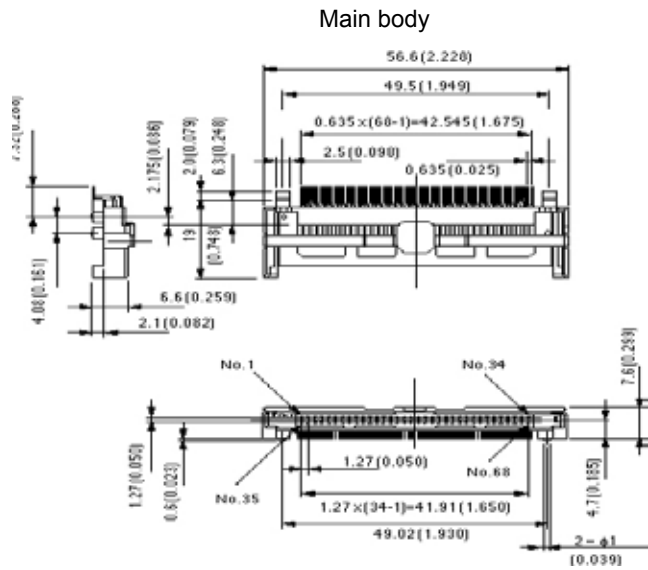
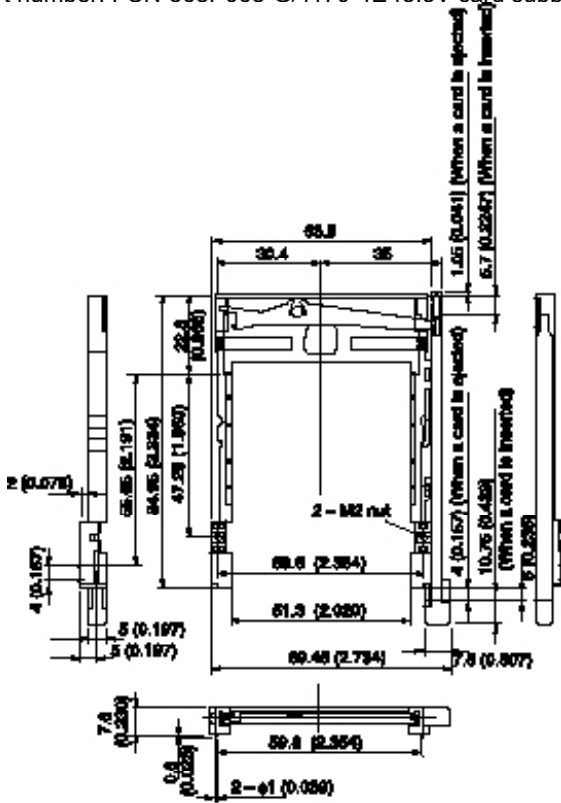


Material  
connector main body: PPS  
guide: PBT  
button: ABS

Unit: mm (in.)

• Connector main body and ejector are shipped separately.

### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

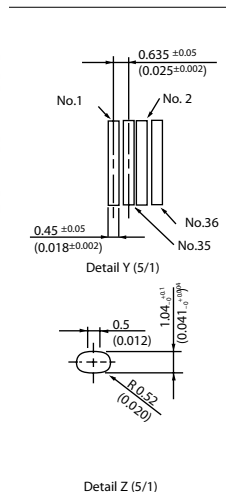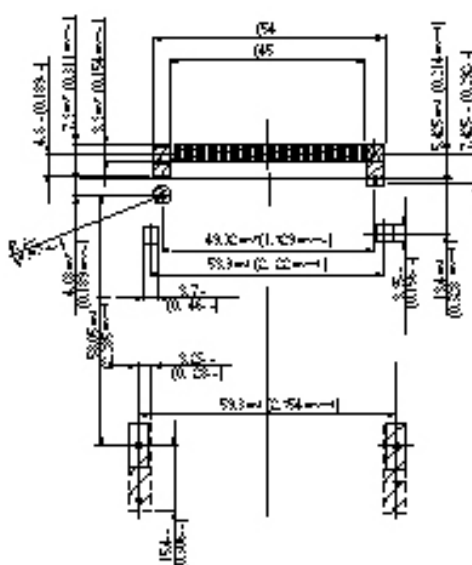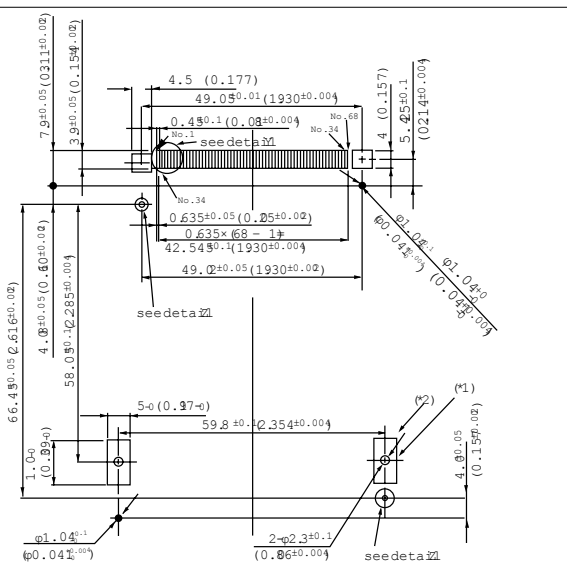

Unit: mm (in.)

Note 1: Use 6mm long screws, screw torque is 2kg/cm

Note 2: Ground pattern

Note 3: Drawing is for the type to be inserted on the front of PCB

Note 4: In hatched area component mounting is prohibited


# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH LEFT-BUTTON EJECTOR, 2 mm RAISED TYPE, WITH FG CLIP)

### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0771-4E (for 5V card)  
 Part number: FCN-568P068-G/1171-4E (3.3V card support)

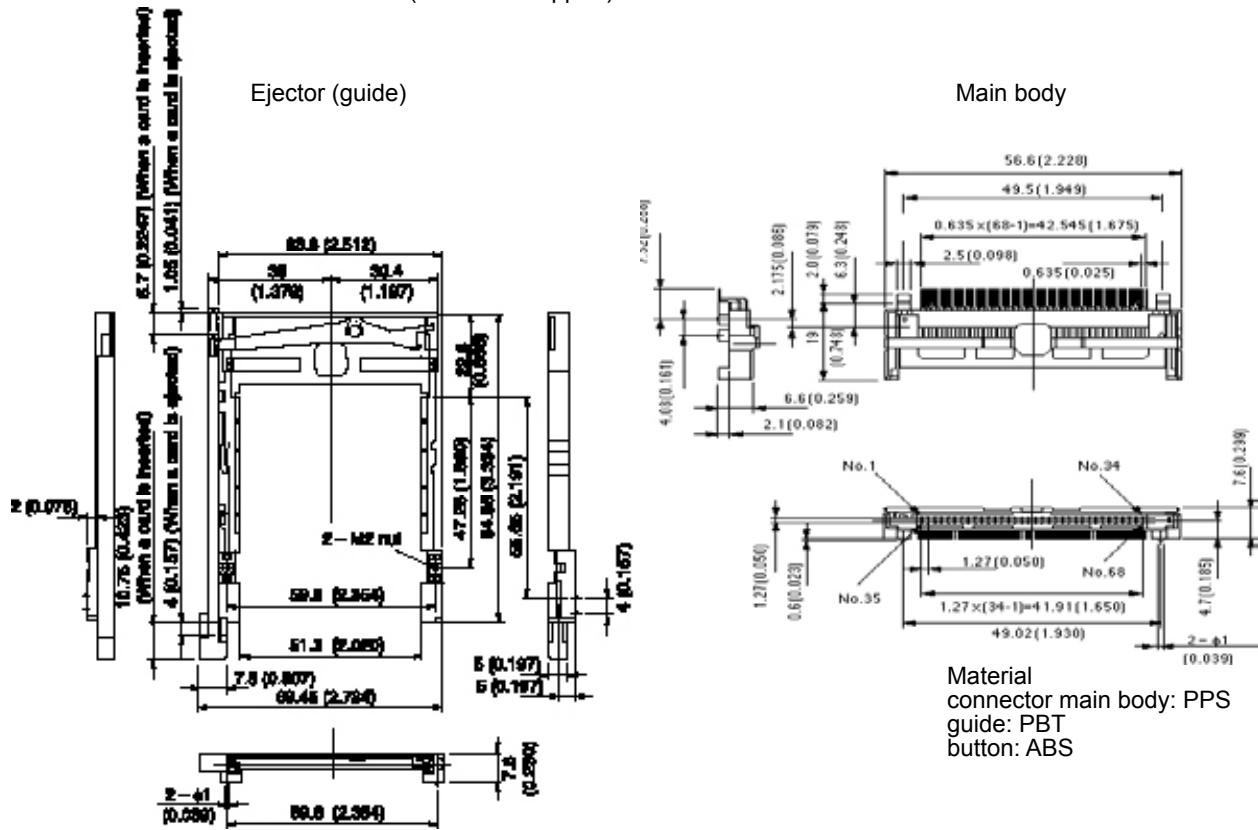


• Connector main body and ejector are shipped separately.

Unit: mm (in.)

Material  
 connector main body: PPS  
 guide: PBT  
 button: ABS

### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

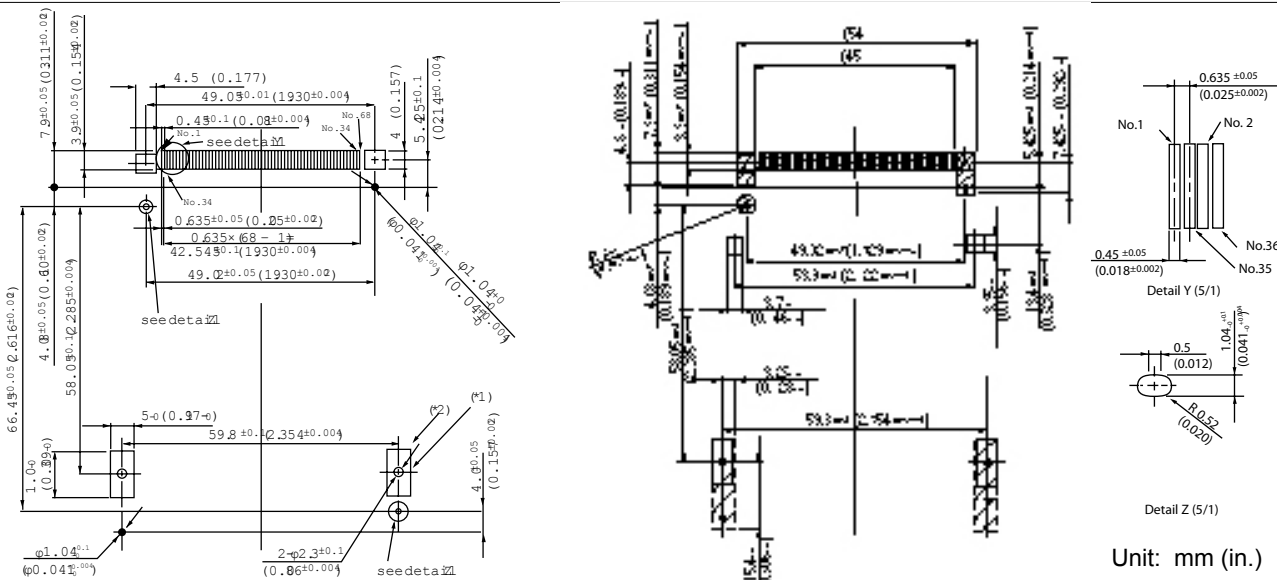

Note 1: Use 6mm long screws, screw torque is 2kg/cm  
 Note 2: Ground pattern

Note 3: Drawing is for the type to be inserted on the front of PCB  
 Note 4: In hatched area component mounting is prohibited

Unit: mm (in.)




# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH RIGHT-BUTTON EJECTOR, 2 mm RAISED TYPE, WITH FG CLIP, TO BE MOUNTED ON BACK OF PC BOARD)

### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0870-4E (for 5V card)  
FCN-568P068-G1270-4E (3.3V card support)

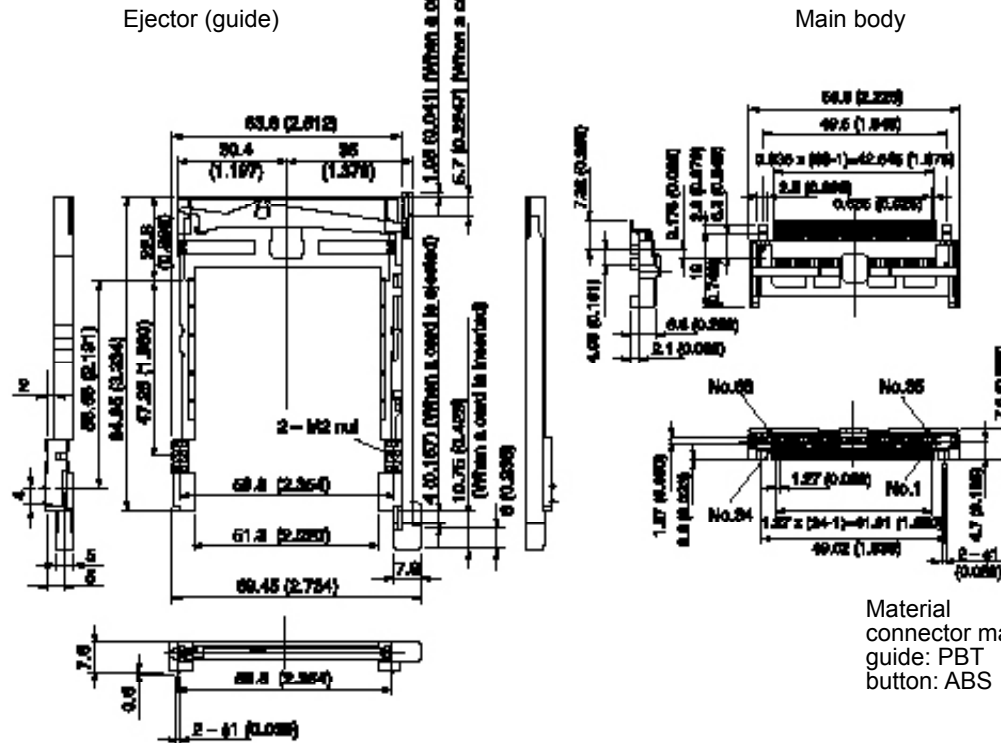


Material  
connector main body: PPS  
guide: PBT  
button: ABS

• Connector main body and ejector are shipped separately.

Unit: mm (in.)

### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

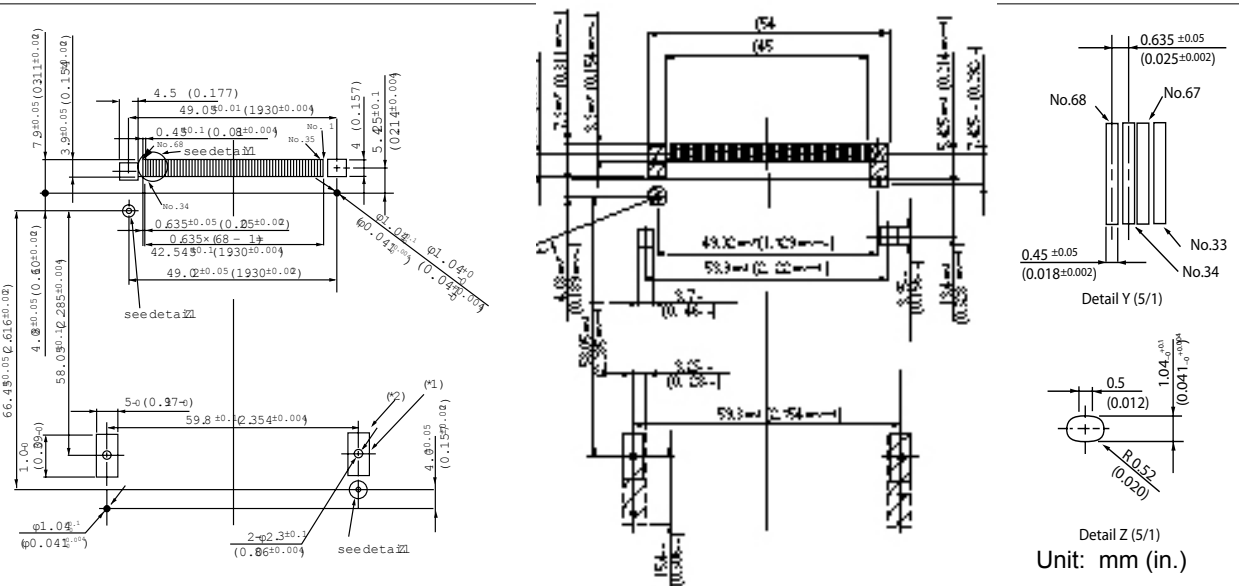

Note 1: Use 6mm long screws, screw torque is 2kg/cm  
Note 2: Ground pattern

Note 3: Drawing is for the type to be inserted on the front of PCB  
Note 4: In hatched area component mounting is prohibited



# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (GUIDE RAILS ONLY, 2.1 mm RAISED TYPE, WITH FG CLIP)

### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0773-4E (for 5V card)  
FCN-568P068-G/1173-4E (3.3V card support)

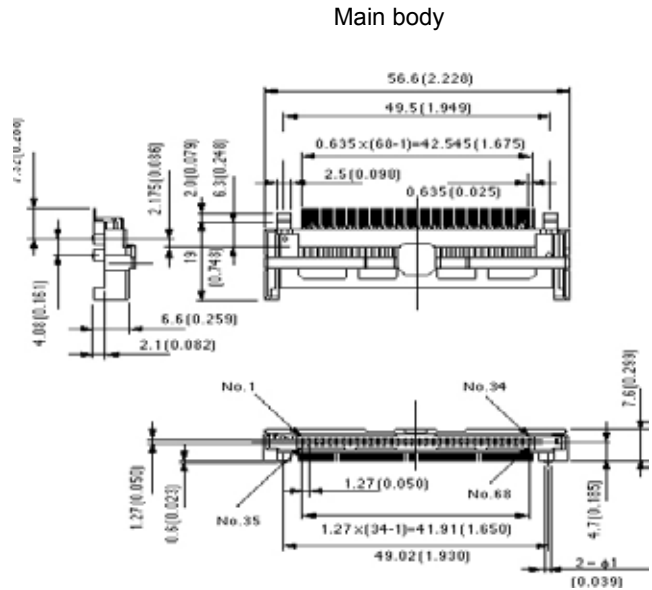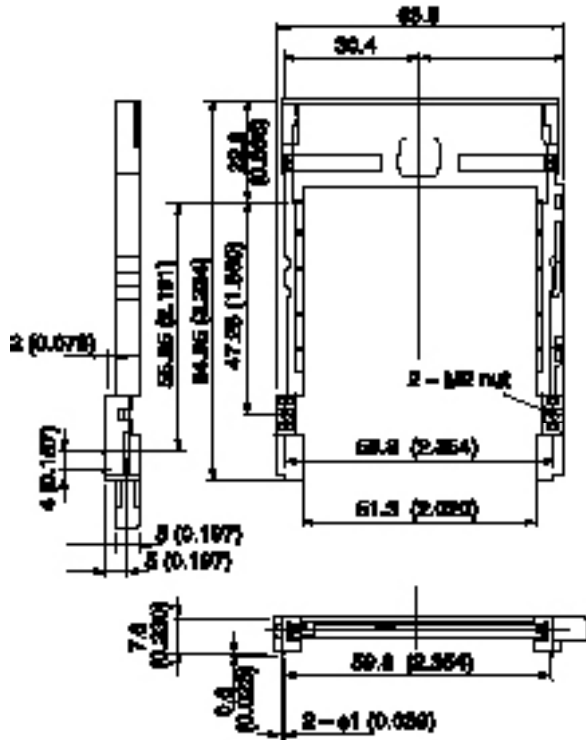




Main body

Material  
connector main body: PPS  
guide: PBT  
button: ABS

Unit: mm (in.)

• Connector main body and ejector are shipped separately.

### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

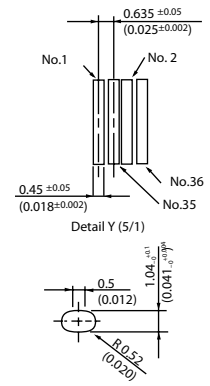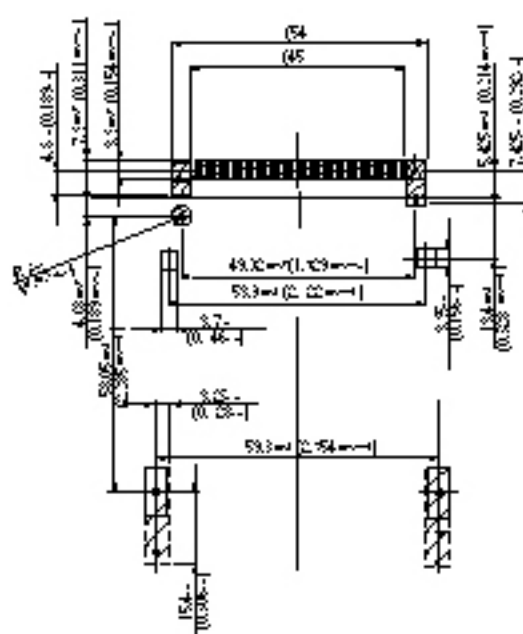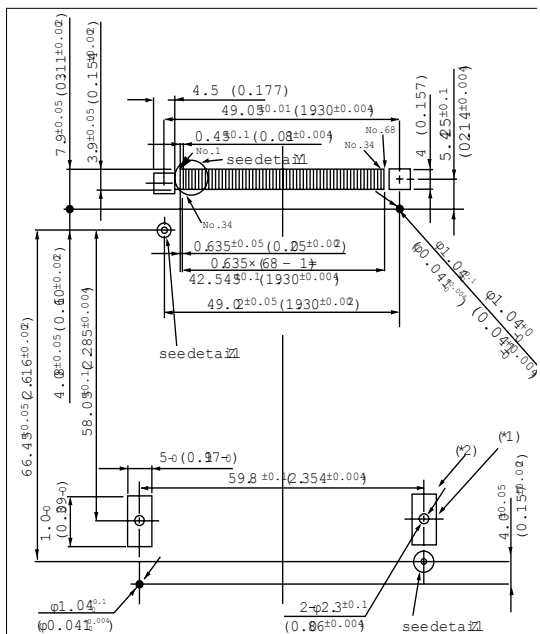

Detail Z (5/1)

Unit: mm (in.)

Note 1: Use 6mm long screws, screw torque is 2kg/cm  
Note 2: Ground pattern

Note 3: Drawing is for the type to be inserted on the front of PCB  
Note 4: In hatched area component mounting is prohibited


# 560H Series Connector Conforming to Ver. 4

## TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH LEFT-BUTTON EJECTOR, 2 mm RAISED TYPE, WITH FG CLIP, TO BE MOUNTED ON BACK OF PC BOARD)

### ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)


Part number: FCN-568P068-G/0871-4E (for 5V card)  
FCN-568P068-G/1271-4E (3.3V card support)

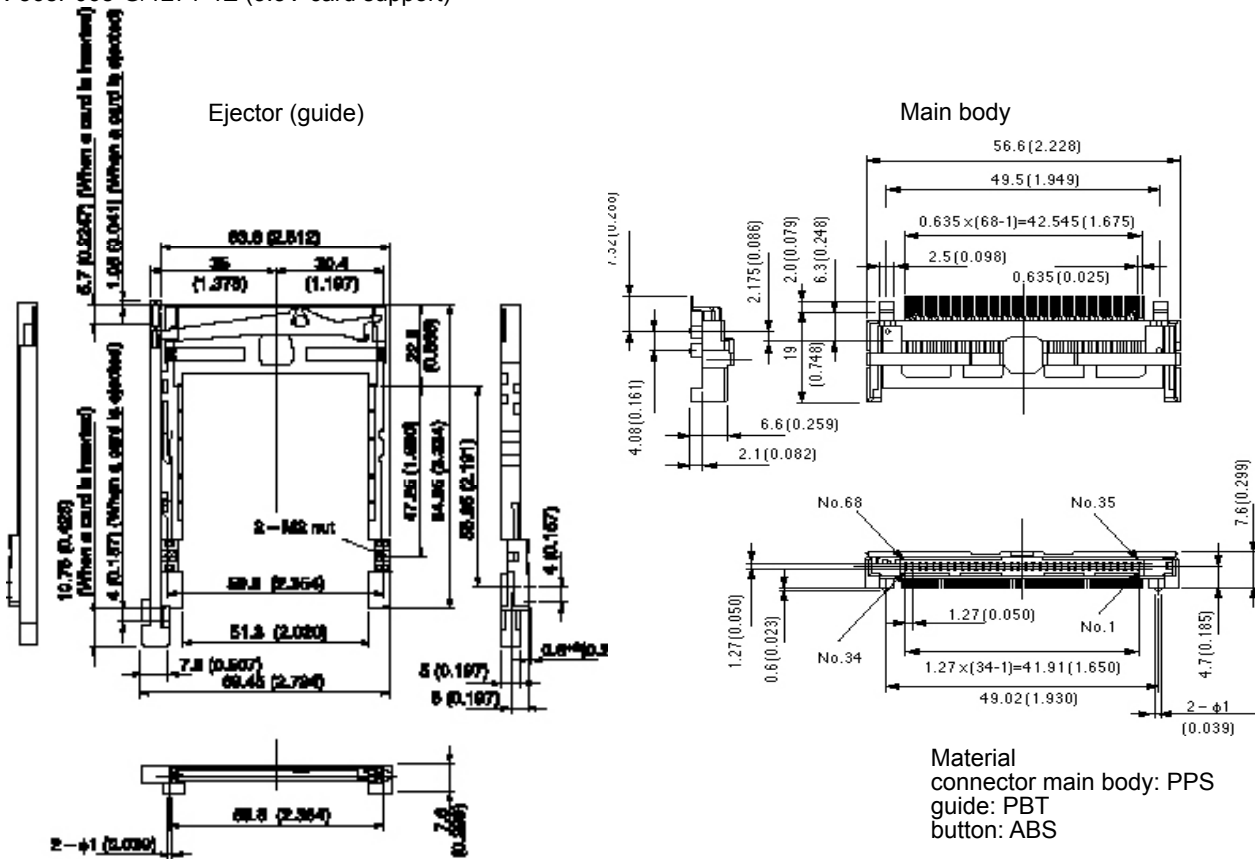

• Connector main body and ejector are shipped separately.

Unit: mm (in.)

### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)

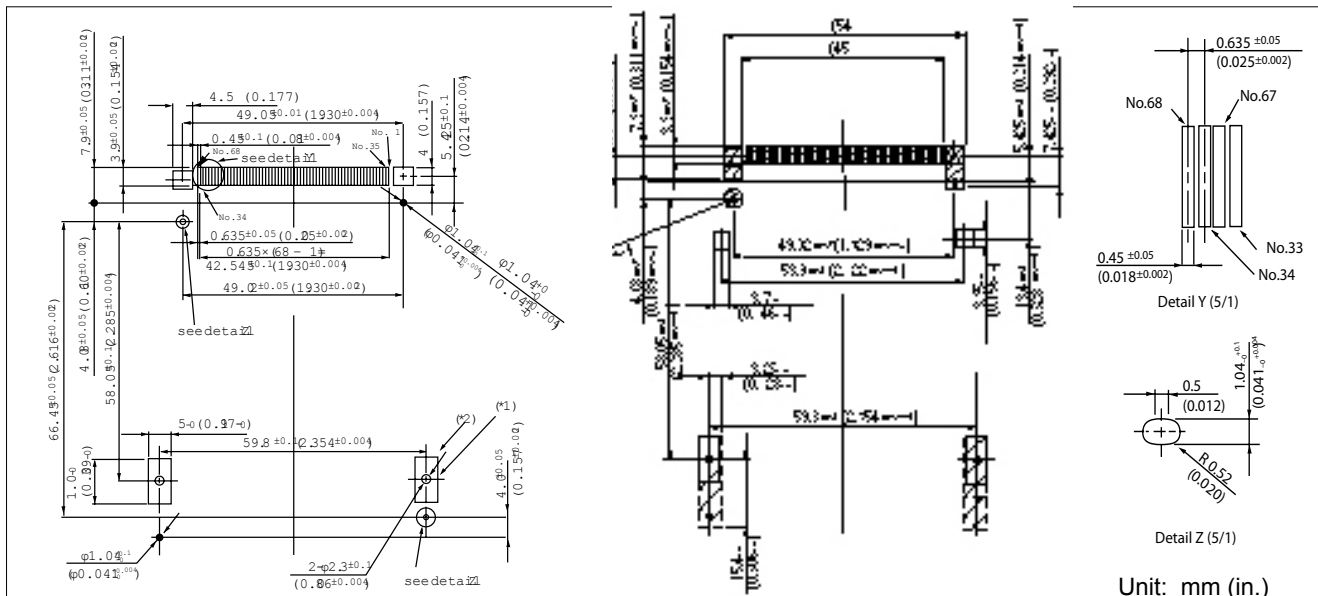

Note 1: Use 6mm long screws, screw torque is 2kg/cm  
Note 2: Ground pattern

Note 3: Drawing is for the type to be inserted on the front of PCB  
Note 4: In hatched area component mounting is prohibited









# 560H Series Connector Conforming to Ver. 4

CARD LOCK TYPE / TYPE 1 ~ III CARD SUPPORT

RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH LEFT-BUTTON EJECTOR, WITH FG CLIP)

## ■ DIMENSIONS (FOR 5V CARD/3.3V CARD)

Part number: FCN-568P068-G/0579-4E (for 5V card)  
 FCN-568P068-G/0974-4E (for 3.3V card support)

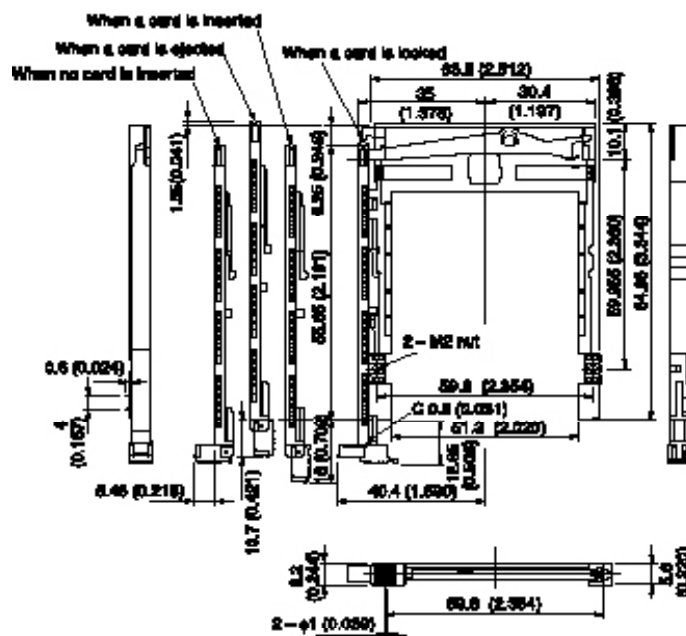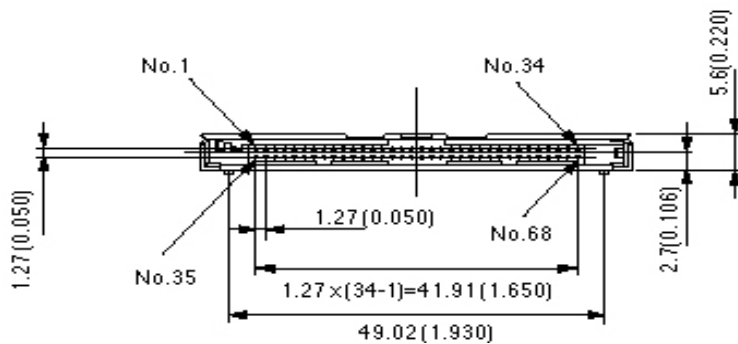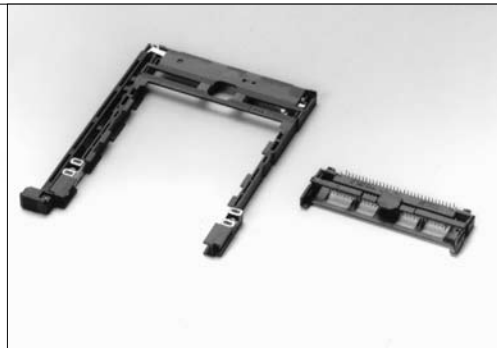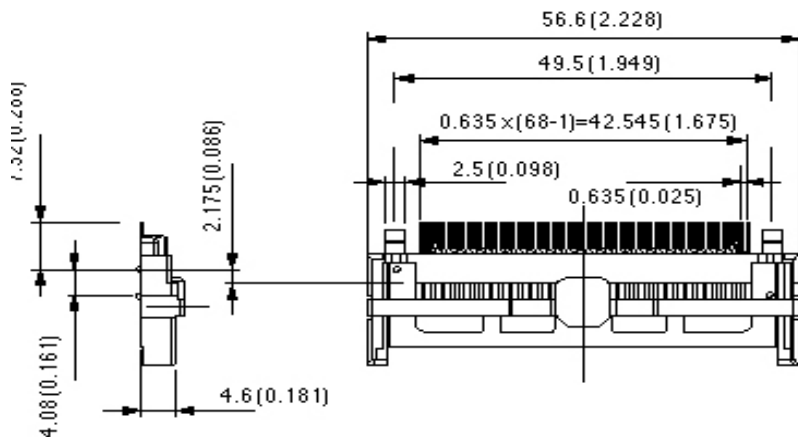



# 560H Series Connector Conforming to Ver. 4

## CARD LOCK TYPE / TYPE 1 ~ III CARD SUPPORT

### RIGHT-ANGLE PLUG, SMT LIGHT WEIGHT TYPE (WITH LEFT-BUTTON EJECTOR, WITH FG CLIP)

#### ■ PC BOARD MOUNTING PATTERN (MOUNTING SIDE)



Part number: FCN-568P068-G/0579-4E (for 5V card)  
 FCN-568P068-G/0974-4E (for 3.3V card support)

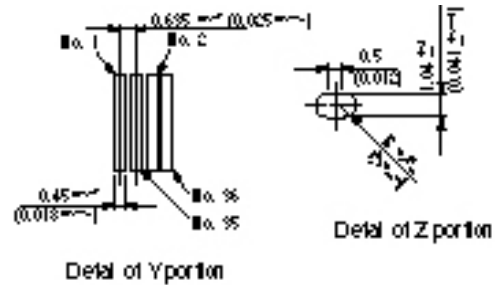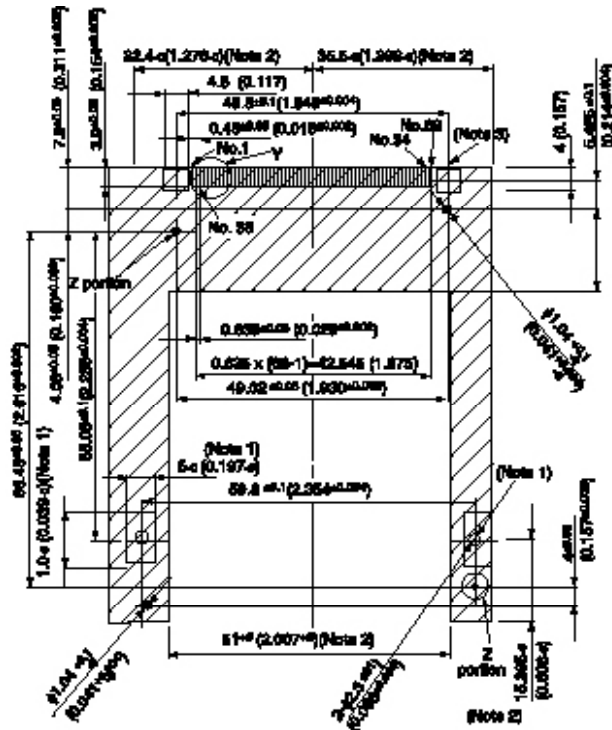

- Note 1: Pattern
- Note 2: In hatched areas, component mounting, VIA holes higher than PC board surface, and patterns are prohibited
- Note 3: Ground Pattern

Unit: mm (in.)

#### ■ RECOMMENDED DIMENSION OF BODY (BUTTON AREA) ■ CARD LOCK METHOD

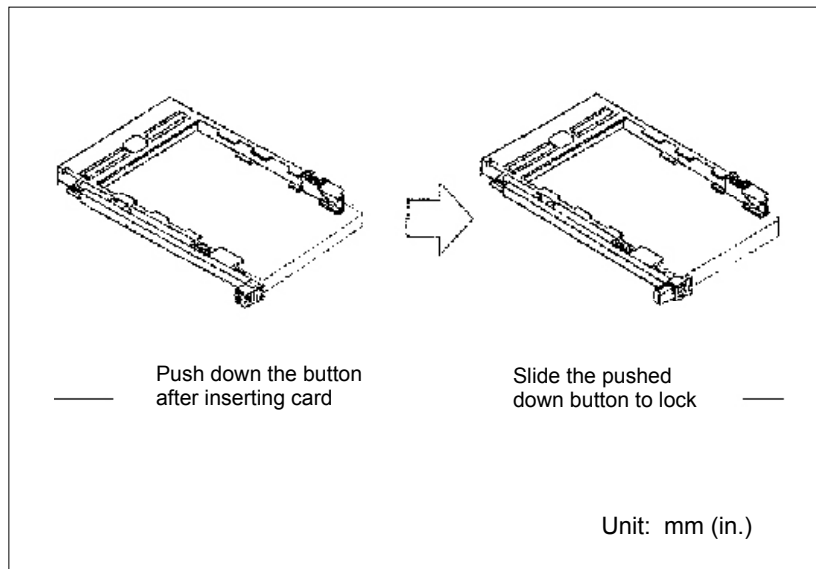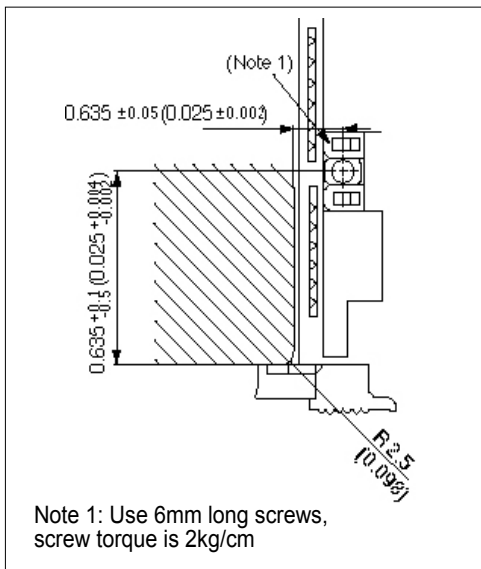

# 560H Series Connector Conforming to Ver. 4

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: <http://www.fujitsu.com/emea/services/components/>

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America does not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. reserves the right to change specifications/datasheets without prior notice. Rev. August 8, 2008.