

STANDARD KEYBOARD

SUPER LOW PROFILE NOTEBOOK KEYBOARD (83/84/87-Keys)

FKB7401 SERIES



■ FEATURES

- 8.5 mm (0.335 in.) total height, 3.0 mm (0.118 in.) stroke, 19mm (0.748 in.) pitch
- Suitable design for A4 size: 288 mm (11.338 in.)(W) × 113 mm (4.448 in.) (D) × 8.5 mm (0.334 in.) (H)
- Supports Windows®95 keyboard function
- Excellent operation
 - Unique “Gear link” method offers comfortable key touch feeling
 - 3.0 mm (0.118 in.) keystroke, 55 g (1.936 oz.) operating force, 20 g (0.704 oz.) tactile response
 - Soft tactile feedback
- Various language versions (83-keys: USA, 84-keys: Europe, 87-keys: Japanese)
- High quality and reliability
- Laser printed keycaps meet environmental requirements
- Evaluation kit available
- RoHS compliant since October 2005 production (serial number 'UX00001" and thereafter)
First 2 digits of serial number consists of manufacturing year and month:
1st Digit: Manufacturing Year:
P=2000 / Q=2001 / R=2002 / S=2003 / T=2004 / U=2005 / V=2006 / W=2007 / X=2008 / Y=2009 / Z=2010
2nd Digit: Manufacturing Month:
1=January / 2=February / 3=March / 4=April / 5=May / 6=June / 7=July / 8=August / 9=September / X=October
Y=November / Z=December

■ MAIN APPLICATIONS

- Notebook type personal computer
- Workstation

■ CONSTRUCTION

- Keyboard unit (without enclosure and microcontroller)

Note: Microcontroller is available as an option.

FKB7401 SERIES


■ SPECIFICATIONS

Item		Specification		
		FKB7401-001	FKB7401-002~007	FKB7401-051
Mechanical	Number of Keys	83 keys	84 keys	87 keys
	Key Switch Type	Membrane switch		
	Keytop Style	Rectangular cylindrical		
	Operating Force	50 gf \pm 25 gf (1.760 \pm 0.88 oz.)		
	Stroke	3.0 mm \pm 0.5 mm (0.118 in. \pm 0.019 in.)		
	Tactile	20 gf typ. (0.704oz.), Soft type		
	Height	8.5 mm (0.334 in.)		
	Operating Life	10 M operations min.		
Electrical	Interface	Row and column matrix		
	Contact Resistance	1 K ohm max. at 5 V DC		
	Key Switch Bounce	10 ms max.		
Environment	Operating Temperature	0 to 50°C		
	Storage Temperature	-20 to 60°C		
	Humidity	90% RH max. at +40°C max. inversely proportional change to 50% RH at 60°C		

■ PART NUMBERS


Parts Number	Number of Keys	Key Arrangement
FKB7401-001	83	U.S.
FKB7401-002	84	U.K.
FKB7401-003		German
FKB7401-004		French
FKB7401-005		Italian
FKB7401-006		Spanish
FKB7401-007		Swedish
FKB7401-008		Swiss
FKB7401-051	87	Japanese

■ OPERATING FORCE AND TRAVEL CHARACTERISTICS

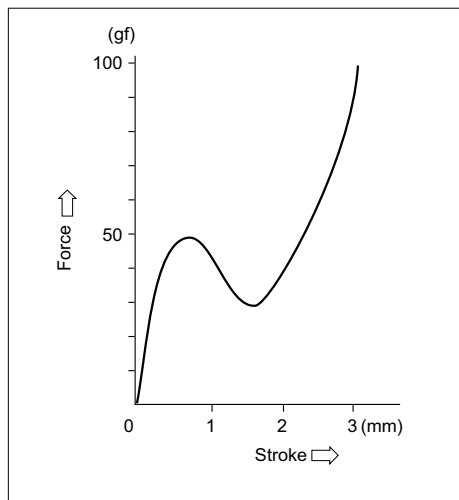

FKB7401 SERIES


■ DIMENSIONS

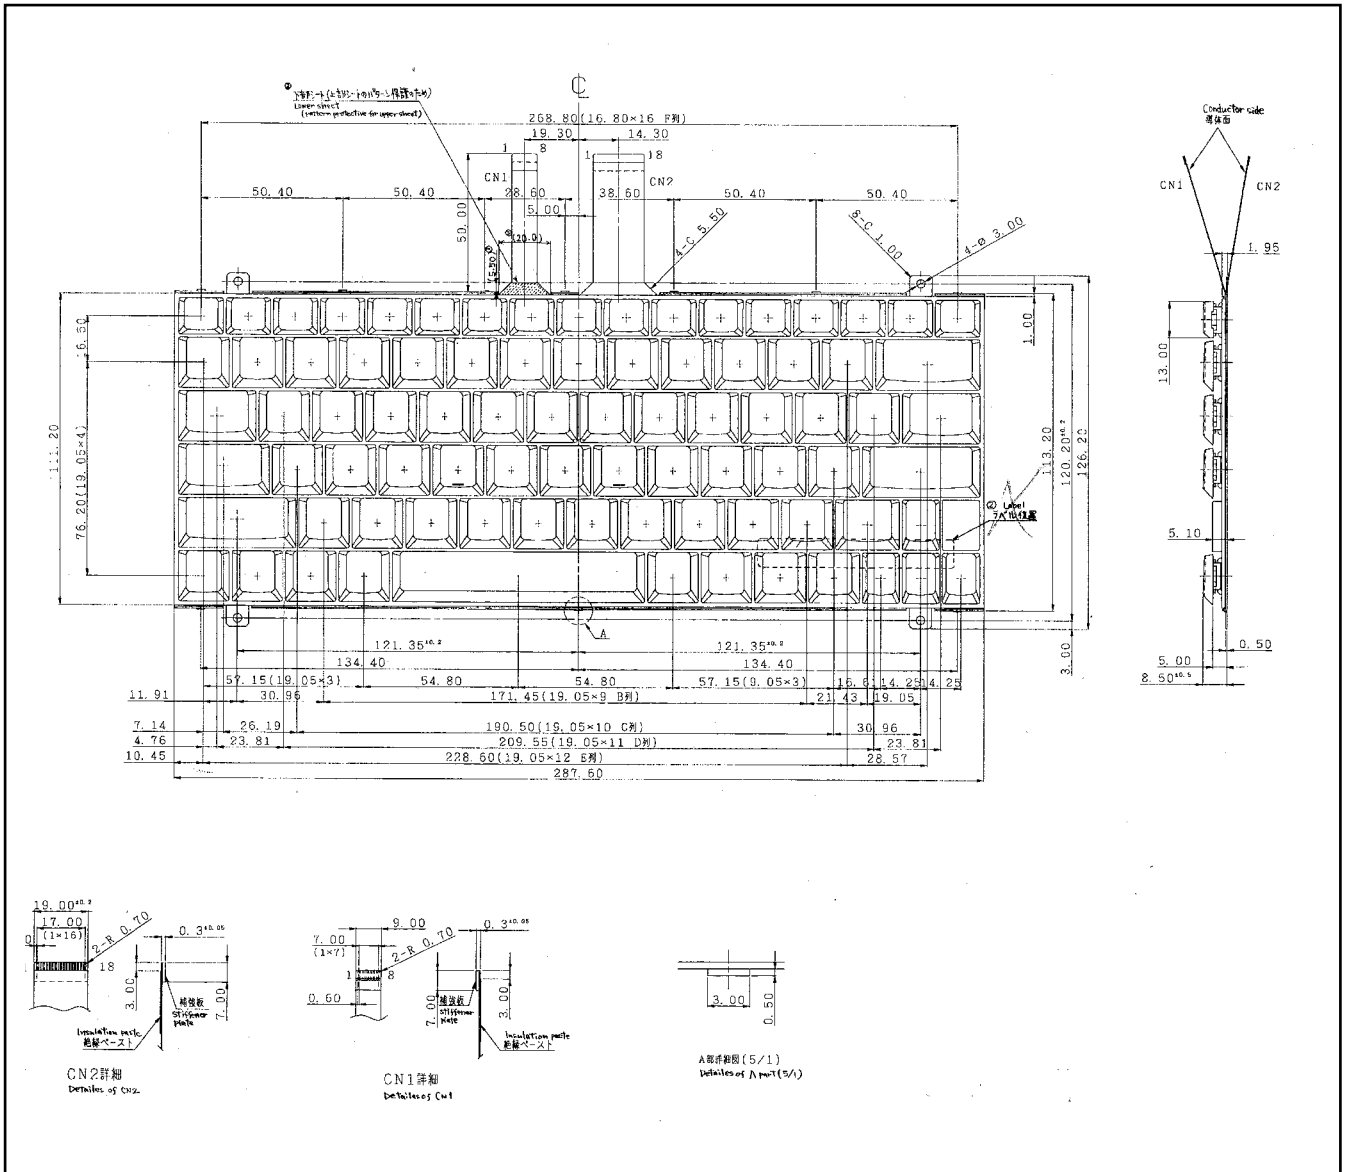


FKB7401 SERIES

KEY LAYOUT


Japanese

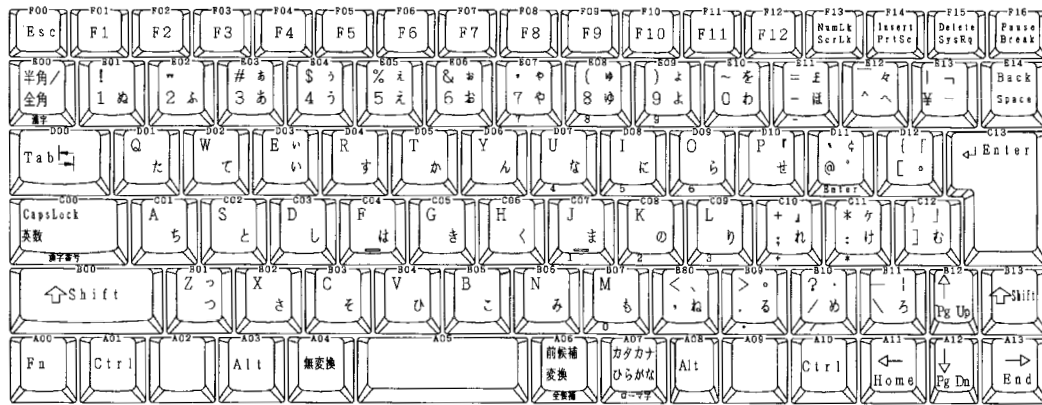

U.S.

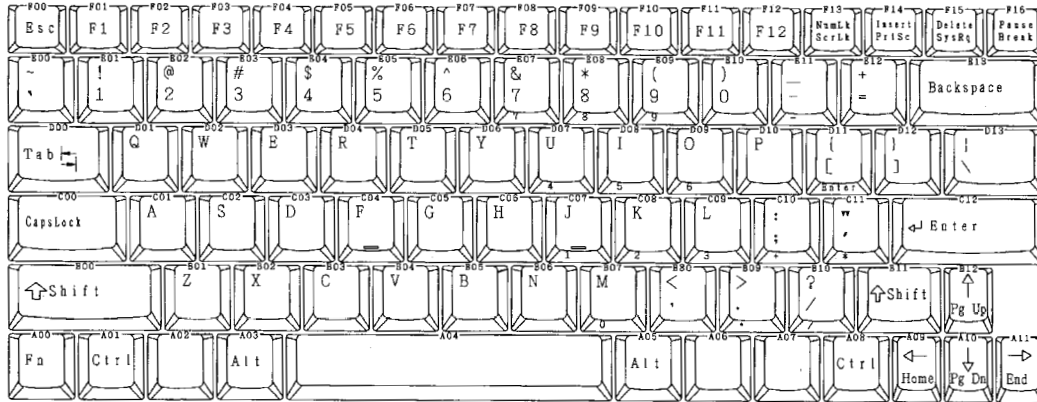

U.K.

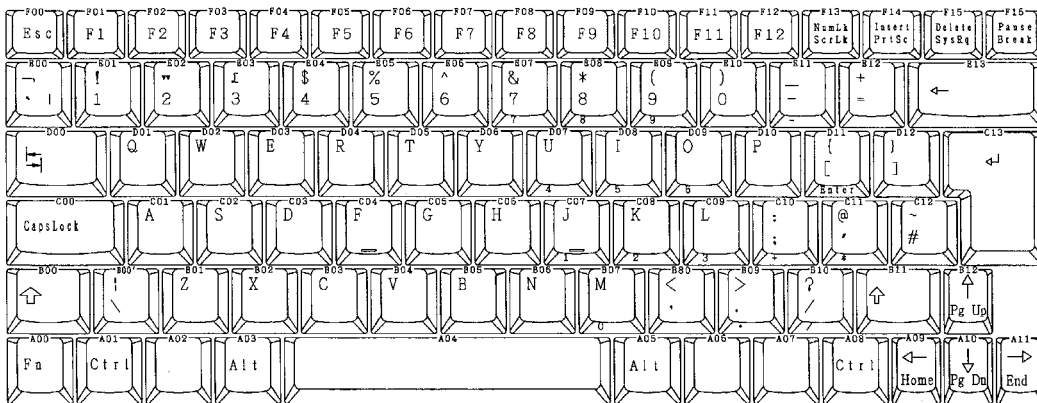

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://www.fujitsu.com/us/services/edevices/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcsl@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. June7/2006