

# POWER RELAY

## 1 POLE – 25A Latching Relay

### FTR-K3L Series

#### ■ FEATURES

- 1 pole, 25A, 1 form A
- 2 coils latching type
- High insulation (between coil and contacts)  
Insulation distance:  
clearance min. 6.4mm  
creepage min. 9.5mm  
Dielectric strength: 5,000VAC  
Surge strength: 8,500V
- Cadmium free contact for eco-program
- Plastic materials  
- UL 94 flame class V-0
- Flux proof, RT II
- RoHS compliant



#### ■ PARTNUMBER INFORMATION

[Example]     FTR-K3L    A    B    012    W  
                          (a)    (b)    (c)    (d)    (e)

(a)	Relay type	FTR-K3L	: FTR-K3L Series
(b)	Contact configuration	A J	: 1 form A / PCB type : 1 form A / Tab type
(c)	Coil power	B	: Standard sensitive (0.9W)
(d)	Coil rated voltage	012	: 5....24VDC See coil data chart
(e)	Contact material	W	: Silver alloy

Actual marking does not carry the type name : "FTR"  
 E.g.: Ordering code: FTR-K3LAB012W    Actual marking: K3LAB012W

# FTR-K3L Series

## ■ SPECIFICATIONS

Item			FTR-K3L
Contact data	Configuration		1 form A
	Construction		Single
	Material		Silver alloy
	Resistance (initial)		Max. 100mΩ at 1A, 6VDC
	Contact rating (resistive)		25A, 250AC
	Max. carrying current		30A
	Max. switching voltage		250VAC
	Max. switching power		6,250VA
	Max. switching current		25A
	Min. switching load *		100 mA, 5VDC
Coil data	Rated power (20°C)		900 mW
	Operating temperature range		-40°Cto +85°C (no frost)
Timing data	Set (at nominal voltage)		Max. 20ms (without bounce, without diode)
	Reset (at nominal voltage)		Max. 20ms (without bounce, without diode)
	Coil excitation time (at nominal voltage)		Min. 30ms, max. 1,000ms
Life	Mechanical		Min. 1 x 10 <sup>6</sup> operations
	Electrical (resistive)		25A, 250VAC, Min. 100 x 10 <sup>3</sup> operations
Insulation	Resistance		Min. 1,000MΩ at 500VDC
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min
		Coil to contacts	5,000VAC (50/60Hz) 1min
	Surge strength	Coil to contacts	8,500V / 1.2 x 50μs standard wave
	Clearance		6.4mm
	Creepage		9.5mm
Others	Vibration resistance	Misoperation	10 to 55 to 10Hz single amplitude 0.825mm
		Endurance	10 to 55 to 10Hz single amplitude 1.0mm
	Shock	Misoperation	Min. 200m/s <sup>2</sup> (11 ± 1ms)
		Endurance	Min. 1,000m/s <sup>2</sup> (6 ± 1ms)
	Weight		Approximately 25g
	Sealing		Flux proof, RTII

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

**!** Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

# FTR-K3L Series

## ■ COIL DATA

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance ± 10% (Ω)	Set Voltage* (VDC)	Reset Voltage* (VDC)	Max. Applicable Voltage (VDC)	Rated Power (mW)
005	5	P 28	+4.0	-	9.0	900
		S 28	-	+4.0		
006	6	P 40	+4.8	-	10.8	
		S 40	-	+4.8		
012	12	P 160	+9.6	-	21.6	
		S 160	-	+9.6		
024	24	P 640	+19.2	-	43.2	
		S 640	-	+19.2		

P: Set coil, S: Reset coil

Note: All values in the tables are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.

- !** Please use at rated coil voltage. Continuous energization on coil at the voltage exceeding max. applicable voltage is prohibited. Insulation deterioration may occur.
- !** Do not apply any voltage exceeding max. applicable voltage on reset coil. Operation failure or mis-operation may occur.


## ■ SAFETY STANDARDS

Type	Compliance	Contact rating
cULus	UL 508 CSA 22.2 No. 14 E63614	Flammability: UL 94-V0 (plastics)
		25A, 277VAC (resistive at 85°C)
VDE	IEC/EN61810-1	25A, 250VAC ( $\cos=\phi 1$ ), 100K operations at 60°C, 60K operations at 85°C

# FTR-K3L Series


## Dimensions

FTR-K3LAB

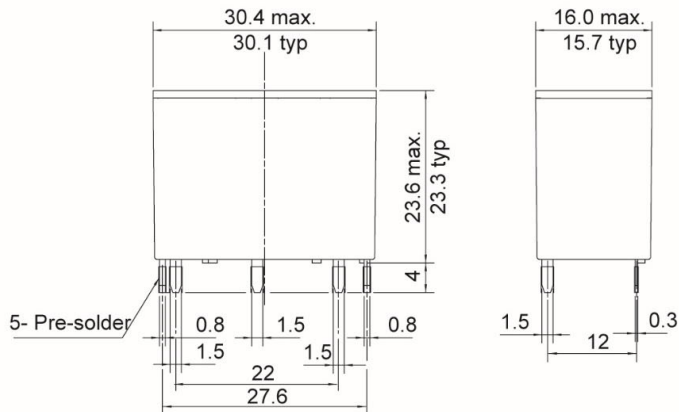

Dimensions of the terminals do no include thickness of pre-solder.


FTR-K3LJB

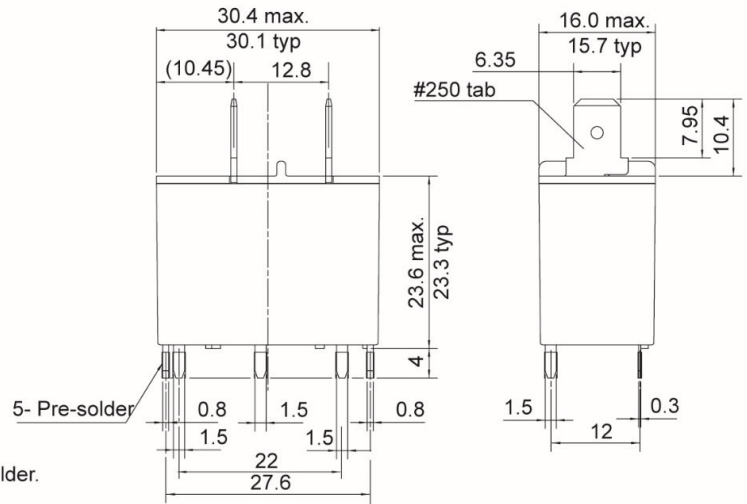


Dimensions of the terminals do no include thickness of pre-solder.

## Schematics

FTR-K3LAB



FTR-K3LJB

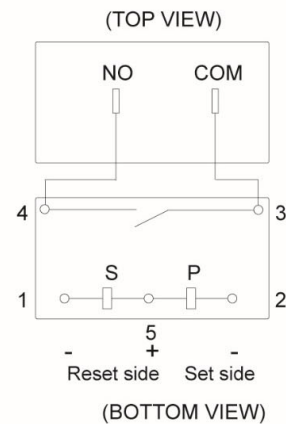


P: Set coil  
S: Reset coil

Contacts drawn in reset condition.

To operate (set), apply + to pin 5 and - to pin 2. To release (reset), apply + to pin 5 and - to pin 1.

## PC board mounting hole layout

FTR-K3LAB/FTR-K3LJB




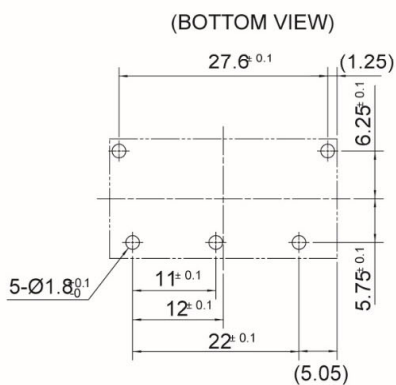


( ): Reference  
Unit: mm

# FTR-K3L Series

## ■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

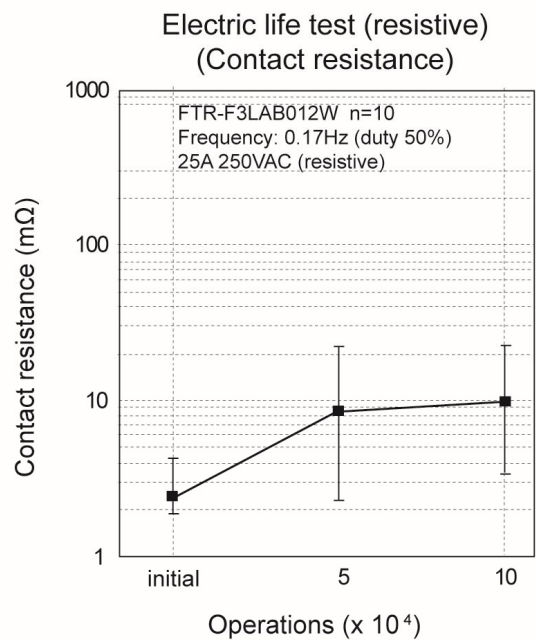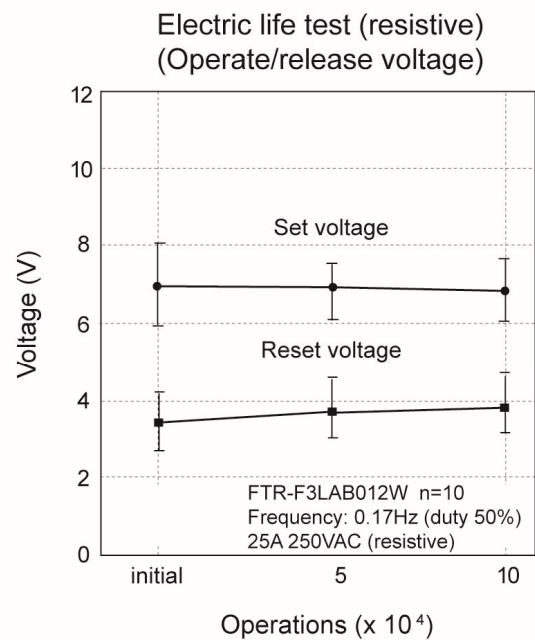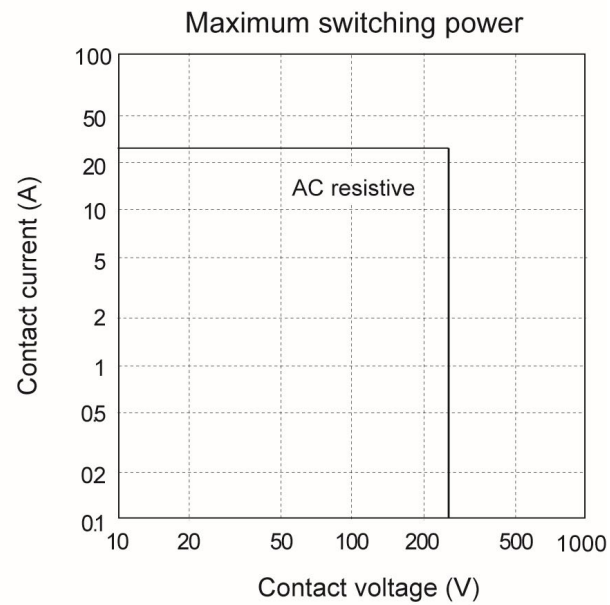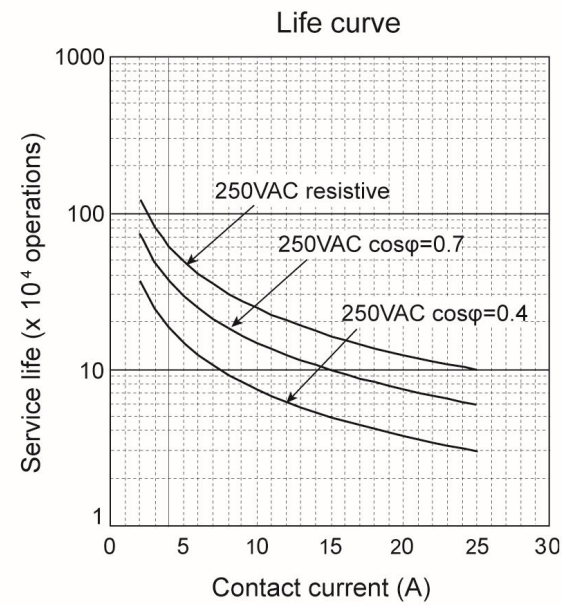

# FTR-K3L Series

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

### Notes for latching relays

- Latching relays are shipped in the state set, but state may change due to shock during transportation or mounting. Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence. Otherwise, it will or will not operate simultaneously with power activation.
- Please connect relay coils according to specified polarity.
- Do not apply voltage to both set coil and reset coil at a time.

## GENERAL INFORMATION

### 1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C  
within 90 sec.  
Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W  
Temperature: Maximum 350-360°C  
Duration: Maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

---

# Contact

**Japan**  
FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: fcl-contact@cs.fcl-components.com

**Asia Pacific**  
FCL COMPONENTS ASIA PTE LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65-6375-8560  
Email: fcal@fcl-components.com

**North and South America**  
FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: fcai.components@fcl-components.com

**China**  
FCL COMPONENTS (SHANGHAI) CO., LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai 200070,  
China  
Tel: +86-21-3253 0998  
Email: fcsh@fcl-components.com

**Europe**  
FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: info.fceu@cs.fcl-components.com

**Web:** [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

---

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk. FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.

---