


COMPACT POWER RELAY (Automotive applications)

1 POLE - 6A (For 24V car battery)

FTR-P3 Series

■FEATURES

- Compact for high density packaging.
- High contact capacity with proven contact material.
(100,000 operations, 28V, 6A)
- Coil power saving
(900mW nominal achieved with state-of-the-art magnetic design)
- Ease of PCB layout
(all terminals on perimeter, coil and contact terminals separated)
- Over-voltage circuit breaking capability with 0.6mm gap.
- Packaging for auto-insertion.
- Application examples: Passive start and entry etc.
- Reflowable & high stand-off
- RoHS compliant



■Part Numbers

[Example] FTR-P3 C P 024 W1 - 06
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-P3 : FTR-P3 Series
(b)	Contact configuration	C : 1 form C
(c)	Contact gap	P : 0.6mm gap
(d)	Coil rated voltage	024 : 24VDC Coil rating table at page 3
(e)	Contact material	W1 : Silver oxide tin-indium
(f)	Special type	06 : High stand-off (Reflowable type)

Actual marking does not carry the type name: "FTR -06"

E.g.: Ordering code: "FTR-P3CP024W1-06", actual marking: "P3CP024W1"

FTR-P3 Series

■ Specification

Item			Characteristics	Remarks / conditions
Contact data	Configuration		1 form C (SPDT)	
	Material		Silver oxide tin-indium	
	Contact path voltage drop		Max. 100mV	At 1A/12VDC
	Contact rating		6A at 28VDC	Resistive load
	Max. carrying current ^{*1}		20A/ 1 hour ^{*3}	25°C, at rated coil voltage
	Max. switching voltage		28VDC	Reference
	Max. switching current		6A (resistive load)	Reference
	Min. switching load ^{*2}		6VDC, 1A	Reference
Coil data	Operating ambient temperature range		-40°C ~ +125°C	No frost
Timing data	Operate		Max. 10ms	At nominal voltage, without bounce
	Release		Max. 5ms max. (without bounce, no diode) Max. 15ms max. (without bounce, with diode)	At nominal voltage
Life	Mechanical		Min. 1 x 10 ⁶ operations	
	Electrical		Min. 100 x 10 ³ operations	6A at 28VDC (resistive load)
Insulation	Resistance (initial)		100MΩ min. (at 500VDC)	
	Dielectric withstanding voltage (initial)		500VAC (50/60Hz, 1min.)	
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 44m/s ² (4.5G) constant accerelation	
		Endurance	10 to 200Hz, acceleration 44m/s ² (4.5G) constant accerelation	
	Shock resistance	Misoperation	Min. 100m/s ² (11 ± 1ms)	
		Endurance	Min. 1,000m/s ² (6 ± 1ms)	
	Weight		Approx. 5g	

^{*1}: Need to consider the heat from PCB when max. current is more than 10A.

^{*2}: Minimum switching loads and maximum switching current mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

^{*3}: Switching during 20A conduction may cause breaking failure.

FTR-P3 Series

■ Coil Data


Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Power Consumption (W)
024	24	640	14.4	1.9	0.9

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise stated.

* Specified operate values are valid for pulse wave voltage.

■ Dimensions


- Dimensions

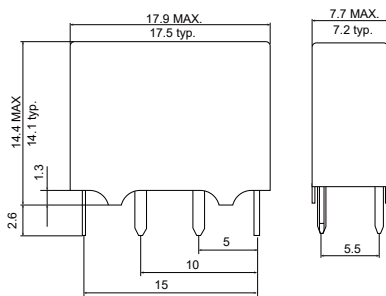


* Dimensions of the terminals do not include thickness of pre-solder.

* Dimensions do not include tolerances. Please ask specification in case you need tolerances.

- Schematics (BOTTOM VIEW)



- PC Board Mounting Hole Layout (BOTTOM VIEW)

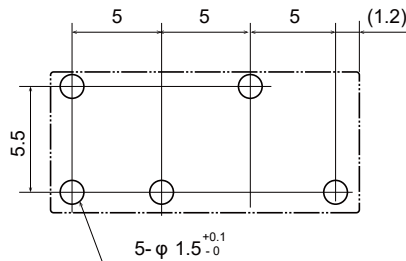

* Tolerance of PC board mounting hole layout: ± 0.1 unless otherwise specified.

(): Reference value
Unit: mm

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited for flow soldering type.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C
solder bath

Relay must be cooled by air immediately after
soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W


Temperature: maximum 340-360°C

Duration: maximum 3 sec.

Reflow Solder Condition:

(Applicable only for reflow capable type)

Recommended reflow soldering profile
IRS (infrared reflow soldering)

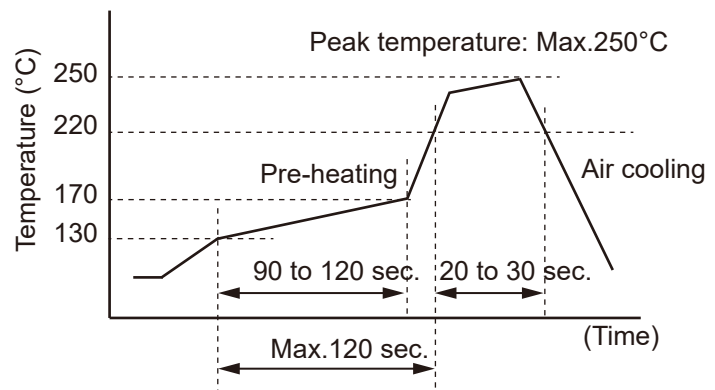

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan
FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

Asia Pacific
FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

North and South America
FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

China
FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Europe
FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk. FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
