
SILENT AUTOMOTIVE RELAY

1 POLE – 25A (for 12V car battery)

FTR-P5 Series

■ FEATURES

- Low operating sound
An original silent mechanism decreases the propagation of operating sound when mounted on a PCB
(Average sound pressure: 50dB at 5 cm, 45dB at 10cm)
- Compact, high density package 198 mm² mounting area
- High sensitivity, low power consumption
(nominal power consumption: 450 mW)
- High capacity
Maximum carrying current 25A 1 hourHeat dissipation is high due to a single cover structure
- Typical applications:
Wiper, power window, doorlock, power seat, sunroof, interior lighting, fan
- RoHS compliant



■ PARTNUMBER INFORMATION

[Example] FTR-P5 C N 012 W1
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-P5	: FTR-P5 Series
(b)	Contact configuration	C	: 1 form C
(c)	Sealing	N	: Plastic sealed
(d)	Coil rated voltage	012	: 9....12VDC See coil rating table
(e)	Contact material	W1	: Silver tin oxide indium

Actual marking does not carry the type name: "FTR"
E.g.: Ordering code: FTR-P5CN012W1 Actual marking: P5CN012W1

FTR-P5 Series

■ SPECIFICATIONS

Item		FTR-P5	
Contact data	Configuration		1 form C
	Material		Silver tin oxide indium
	Contact path voltage drop		Max. 100mV at 1A, 12VDC
	Contact rating		14VDC, 25A (motor locked)
	Max. carrying current		25A/1 hour (25°C, nominal voltage applied to coil)
	Max. switching voltage		16VDC (reference)
	Max. switching current		35A (reference)
	Min. switching load *		6VDC, 1A (reference)
Coil	Operating temperature range		-40°C to +85°C (no frost)
	Storage temperature range		-40°C to +100°C (no frost)
Timing data	Operate (at nominal voltage)		Max. 10 ms
	Release (at nominal voltage)		Max. 5 ms (without diode), max. 15ms (with diode)
Life	Mechanical		Min. 10 million operations
	Electrical		Min. 100k operations (at contact rating)
Others	Vibration resistance	Misoperation	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration
		Endurance	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration
	Shock resistance	Misoperation	100m/s ² (11 ± 1ms)
		Endurance	1,000m/s ² (6 ± 1ms)
	Weight		Approximately 7 g
	Average sound pressure		Approximately 50dB at 5cm

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

! Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

FTR-P5 Series

■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ (Ω)	Must Operate Voltage* (VDC) *	Must Release Voltage* (VDC) *	Power consumption at nominal coil voltage (mW)
009	9	180	5.5 (at 20°C) 6.9 (at 85°C)	0.7 (at 20°C) 0.9 (at 85°C)	450
010	10	220	6.3 (at 20°C) 7.9 (at 85°C)	0.8 (at 20°C) 1.0 (at 85°C)	455
012	12	320	7.3 (at 20°C) 9.2 (at 85°C)	1.0 (at 20°C) 1.3 (at 85°C)	450


Note: All values in the table are valid for 20° C and zero contact current, unless otherwise stated.

*: Specified operate values are valid for pulse wave voltage.


! Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

■ DIMENSIONS


- Dimensions

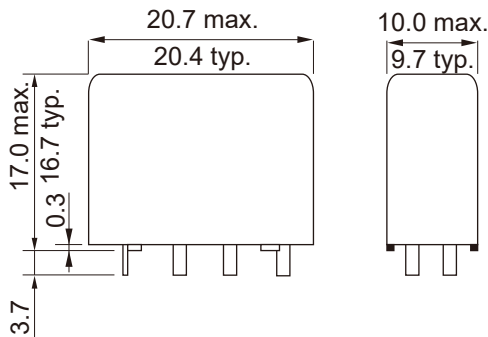

- Schematics (Bottom view)



- PC board mounting hole layout (Bottom view)



Unit:mm
(): Reference


FTR-P5 Series

CHARACTERISTIC DATA


(Characteristic data is not guaranteed value but measured values of samples from production line)

Life test (example)


- Test item
Inrush 17A 14VDC
Motor free
300K operations minimum
0.25 seconds ON
9.75 seconds OFF
- Test circuit




- Change in pick-up drop-out voltage

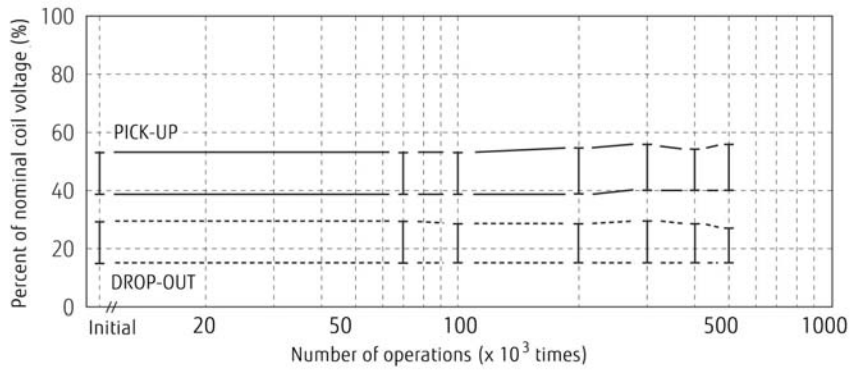


- Current wave form



- Change in contact resistance

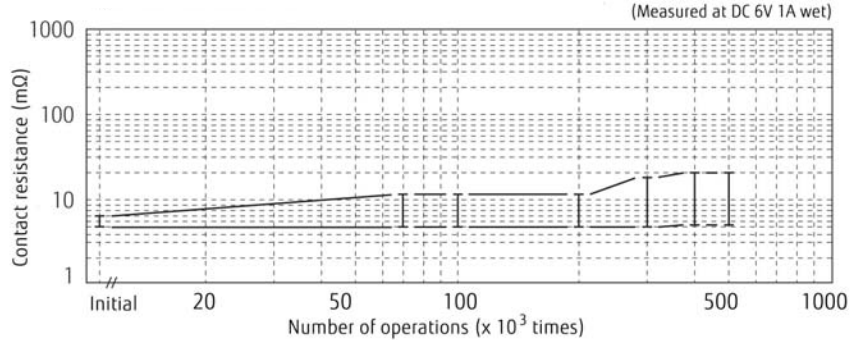


- Test item
25A 14VDC
Motor lock
100K operations minimum
0.25 seconds ON
9.75 seconds OFF
- Test circuit




- Change in pick-up drop-out voltage



- Current wave form




- Change in contact resistance

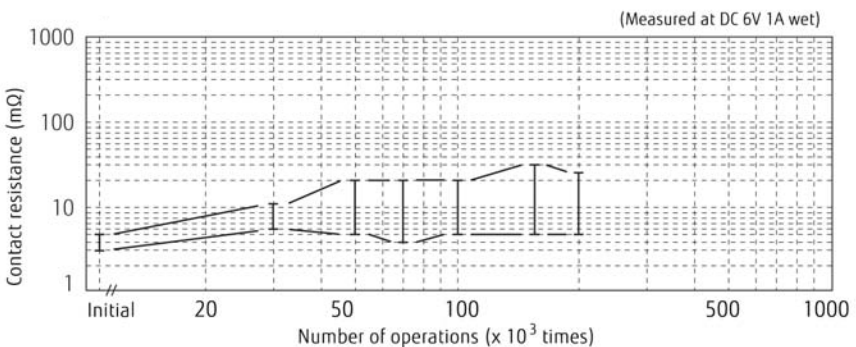


FTR-P5 Series


Coil temperature rise

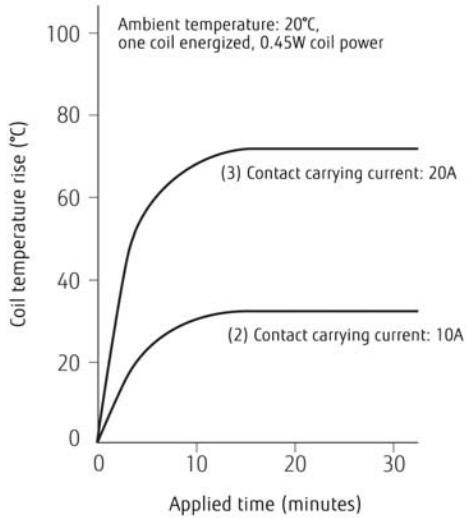


Operating coil voltage range

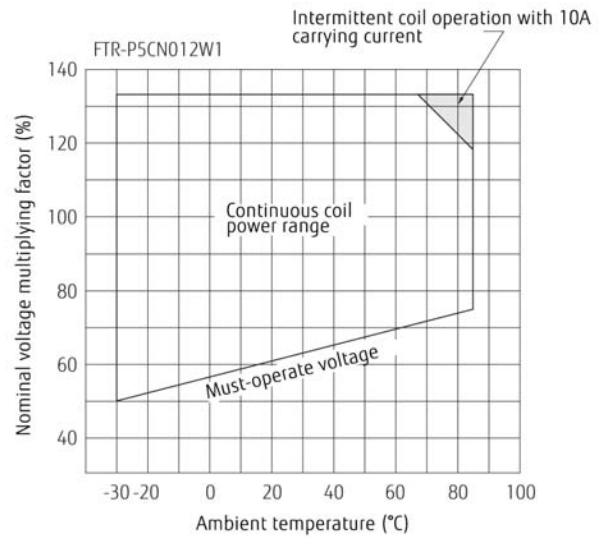


Vibration resistance characteristics

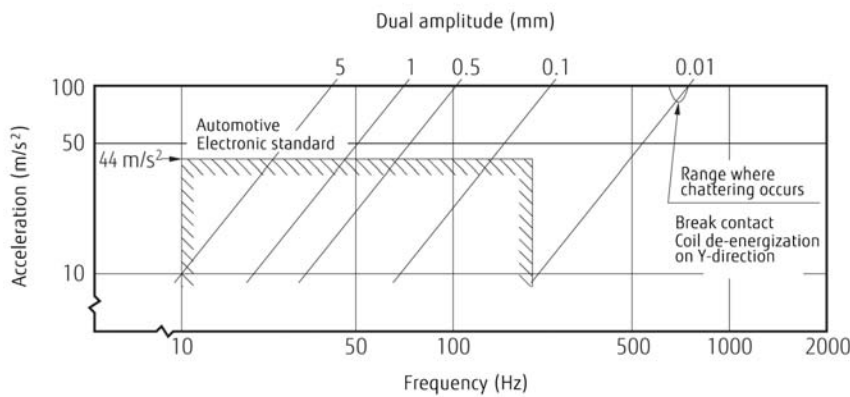


Frequency: 10-1000Hz
 Acceleration: 100m/s² maximum
 Vibration direction: See drawing below
 Detection level: Generation of 1ms or longer chattering



Shock resistance characteristics

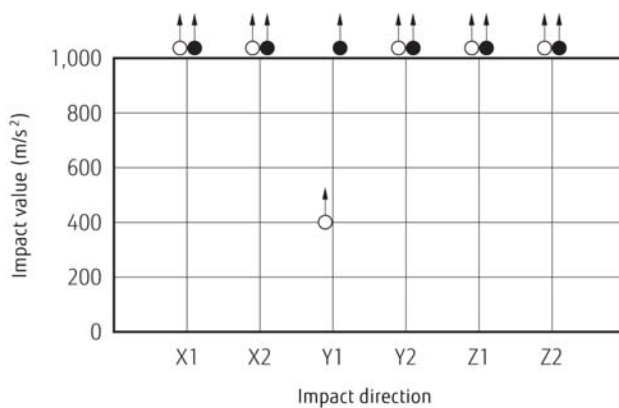


Impact apply time: 6±1ms, half sine wave
 Test condition: Coil energized and de-energized
 Impact direction: See drawing below
 Detection level: Generation of 1ms or longer contact chattering




○ : Break contact (coil de-energized)
 ● : Make contact (coil energized)

FTR-P5 Series


Maximum break capacity

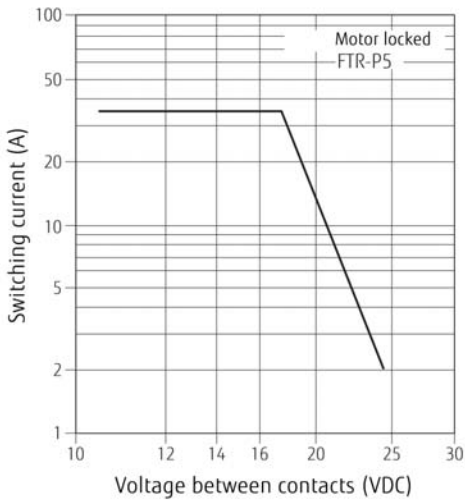


Life

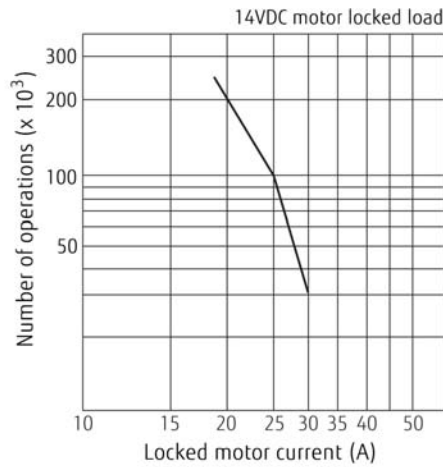

Distribution of sound pressure (with diode)

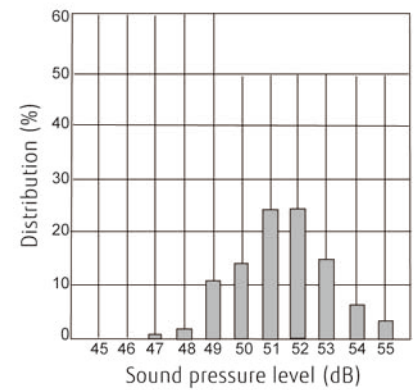


Test circuit




REFERENCE DATA


Distribution of operate/release voltage

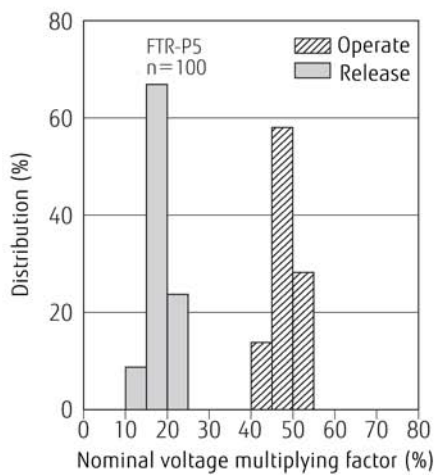

Distribution of operate/release time

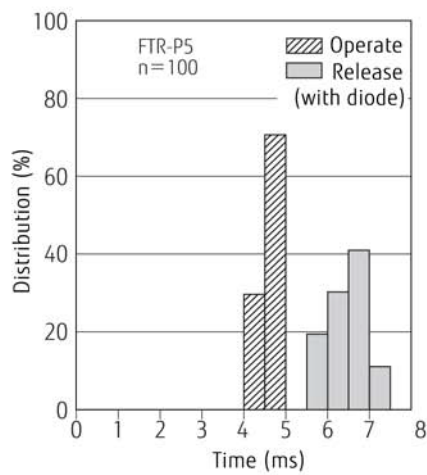

Distribution of contact resistance

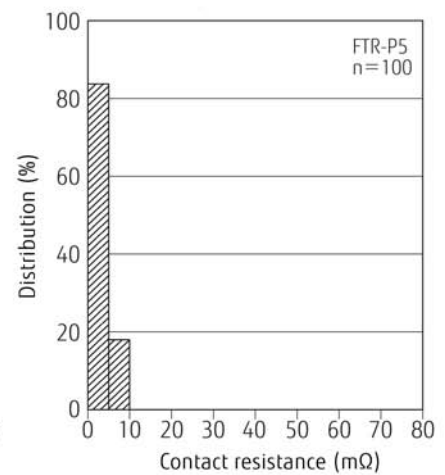

FTR-P5 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
