

SOLID STATE RELAY

Maximum Load current 1A

FTR-SL SERIES

RoHS compliant

■ FEATURES

- Ultra slim and light weight, SIL terminal type
— size: 5.0 (W) x 28.0 (L) x 15.0 (H): 140mm mounting area
— weight: approximately 4.0g
- Internal varistor and snubber circuit
- High insulation (between input and output) - dielectric strength 2500Vrms
- Include a zero cross circuit as standard equipment
- High frequency switching, long life and maintenance free
- High impact/vibration resistance, good for automatic assembly, washable
- RoHS compliant since date code: 6202 (February 2nd, 2006)

Please see page 5 for more information



■ ORDERING INFORMATION

[Example] FTR-SL P K 024 W
 (a) (b) (c) (d) (e)

(a)	Series Name	FTR-SL : FTR-SL Series
(b)	Load Voltage	P : AC type
(c)	Input or Output Type	K : Output type
(d)	Nominal Voltage	005 : 5 VDC 012 : 12 VDC 024 : 24VDC 060 : 60 VDC
(e)	Zero Cross Circuit Output Protection	W : With Zero Cross Circuit and Varistor

Note: The part number on the relay cover does not include 'FTR'
 Example: Ordering part number: FTR-SL-PK012W
 Stamped part number: SLPK012W

FTR-SL SERIES

■ SPECIFICATION


Item		FTR-SLPK005W	FTR-SLPK012W	FTR-SLPK024W	FTR-SLPK060W
Input side	Nominal Voltage	5 VDC	12 VDC	24 VDC	60 VDC
	Operate Range	3.75 to 6 VDC	9 to 14.4 VDC	18 to 28.8 VDC	48 to 66 VDC
	Must operate voltage	3.75 VDC	9.0 VDC	18 VDC	48 VDC
	Must release voltage	1.25 VDC	3.6 VDC	8.4 VDC	18 VDC
	Input Impedance	560Ω ±10%	1.3KΩ ±10%	2.4KΩ ±10%	10KΩ ±10%
Output side	Load voltage range	24 to 250 AC Vrms			
	Max. load current	1 Arms			
	1 cycle surge current	50 A (60 Hz, 1 cycle)			
	max. off-state leakage current	max. 1 mArms (60Hz, 220 AC Vrms)			
	max. on-state voltage drop	max. 1.3 V (1Arms, 50Hz)			
Temperature	Storage temperature range	-40 to +100° C (no frost)			
	Operating temperature range	-30 to +85° C (no frost)			
Time	Max. operating time	max. 1/2 cycle + 1ms			
	Max. release time	max. 1/2 cycle + 1ms			
Output protection		Snubber circuit and varistor			
Other	Case color	Black			
	weight	Approximately 4.0g			

■ INSULATION


Item	AC 1.0A type	Note
Resistance (initial)	Minimum 1,000 MΩ (500VDC)	Input-output
Surge Voltage	2,500V rms 1 min.	

FTR-SL SERIES

■ BLOCK DIAGRAM

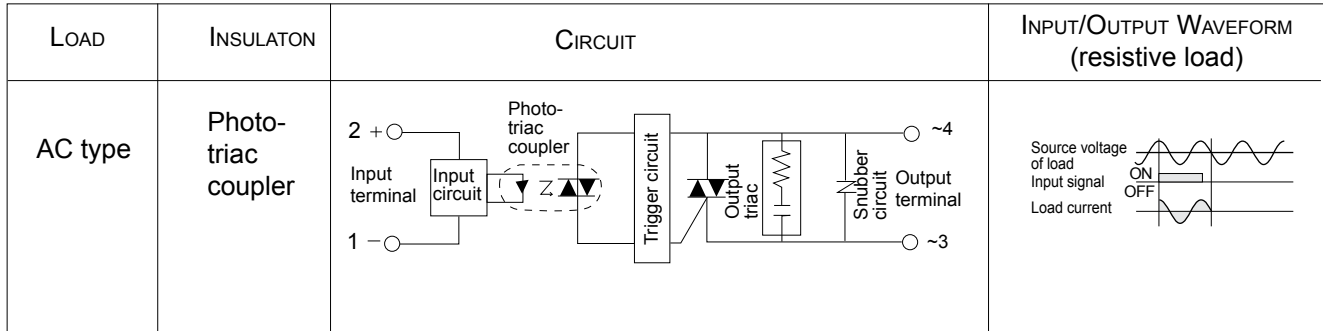


■ CHARACTERISTIC DATA

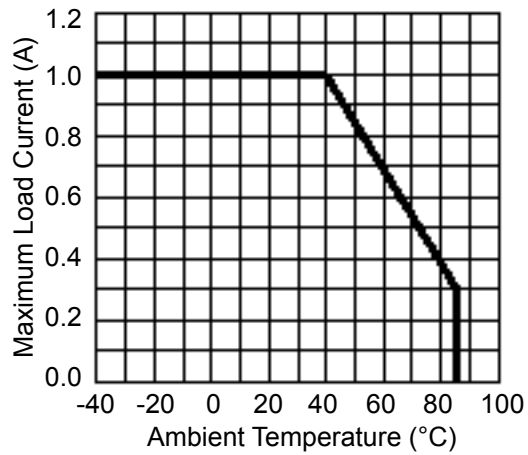

FTR-SL SERIES

■ DIMENSIONS

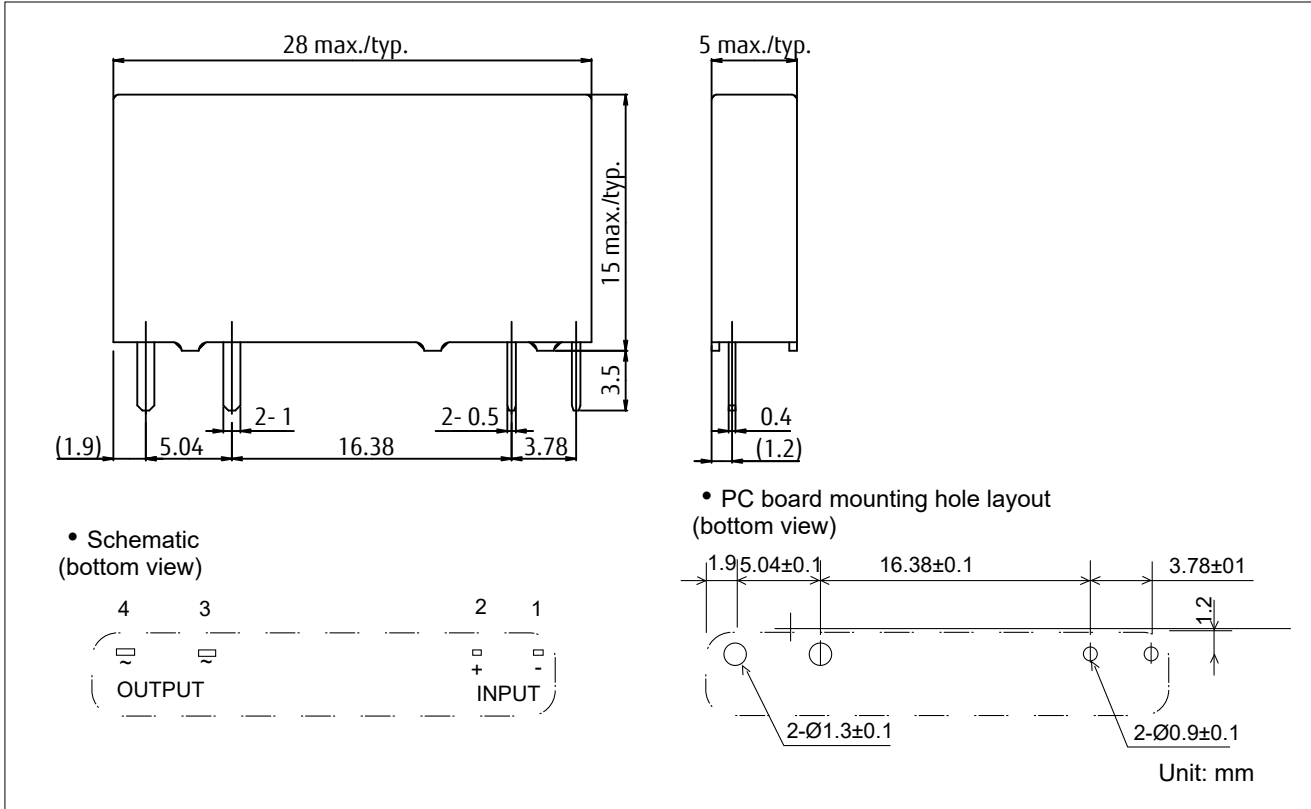

■ NOTES

Polarity of terminals are pre-determined. Please design your circuit accordingly.

FTR-SL Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. RoHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
