

COMPACT POWER RELAY

1 POLE – 210A Battery Latching Relay

FTR-V1 Series

■ FEATURES

- 1 pole 210A 1 form B relay for 12V car battery
- Low profile
- Double winding latching relay
- 210A (at 85°C) / 120A (at 125°C) continuous current
- Low contact resistance: Max. 0.6mΩ (initial, at 1A)
- Ambient temperature up to 125°C)
- Plastic sealed
- Plastic material: Conforms to UL94V-0 flammability



■ APPLICATIONS

Disconnect of battery / capacitor, protection of battery / capacitor, switch of 2 power supplies.

■ PARTNUMBER INFORMATION

[Example] $\frac{\text{FTR-V1}}{\text{(a)}} \frac{\text{U}}{\text{(b)}} \frac{\text{C}}{\text{(c)}} \frac{\text{012}}{\text{(d)}} \frac{\text{W}}{\text{(e)}} - \frac{\text{ST}}{\text{(f)}}$

(a)	Relay type	FTR-V1	: FTR-V1 Series
(b)	Contact configuration	U	: 1b (1 form B)
(c)	Coil type	C	: Dual coil latching
(d)	Coil voltage	012	: 12VDC
(e)	Contact material	W	: Silver alloy
(f)	Special type	ST	: Standard

Actual marking does not carry the type name: "FTR"
E.g.: Ordering code: FTR-V1UC012W Actual marking: V1UC012W

FTR-V1 Series

■ SPECIFICATIONS

Item		FTR-V1	
Contact data	Configuration	1b (1 form B)	
	Material	Silver alloy	
	Construction	Twin	
	Contact rating	Inrush: 230A 14VDC Break: 1A 14VDC	
	Contact voltage drop (initial)	Max. 0.6mV at 1A 6VDC	
	Contact resistance (initial)	Max. 0.6mΩ at 1A 6VDC	
	Continuous current	210A (at 85°C, cable size 38mm ²) 120A (at 125°C, cable size 38mm ²)	
	Max. breaking current	500A 12VDC resistive, 1,000 operations	
	Min. switching load *	6VDC, 1A (reference)	
Coil data	Operating ambient temperature range	-40°C to +125°C (no frost)	
	Rated power consumption	28.8W (at nominal voltage, at 20°C)	
	Pulse width	50 to 100ms	
Timing data	Set (at nominal voltage, at 20°C)	Max. 10ms (without bounce)	
	Reset (at nominal voltage, at 20°C)	Max. 10ms (without bounce)	
Life	Mechanical	200 x 10 ³ operations	
	Electrical	120 x 10 ³ operations (Inrush :230A 14VDC / Break:1A 14VDC)	
Insulation	Resistance (initial)	100M Ω at 500VAC	
	Dielectric withstanding voltage (initial)	Between open contacts	500VAC(50/60Hz), 1 minute
		Between coil-contact	500VAC(50/60Hz), 1 minute
Others	Vibration resistance	Misoperation	10 to 200Hz, acceleration 45m/s ² , constant acceleration (Detection 1ms, set/reset)
		Endurance	10 to 200Hz, acceleration 45m/s ² , constant acceleration (Set/reset, up/down 4 hours, left/right 2 hours)
	Shock resistance	Misoperation	Min. 100m/s ² (11 ± 1ms) (Detection 1ms, set/reset 36 times each)
		Endurance	Min. 1,000m/s ² (6 ± 1ms) (Set/reset 36 times total)
	Weight	Approximately 120 g	
	Sealing	Sealed, RT III	

Note: Values of electrical characteristics are under 15 to 35°C, 25 to 75%RH, air pressure 86kPa to 106kPa (JIS standard condition) unless otherwise specified.

* : Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-V1 Series

■ COIL RATING


Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ (Ω)	Must Set/Reset Voltage (V) *
012	12	5	5.4 (20°C)
			5.8 (85°C)
			7.7 (125°C)

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise stated.


* Specified operate values are valid for pulse wave voltage.

■ DIMENSIONS


● Dimensions

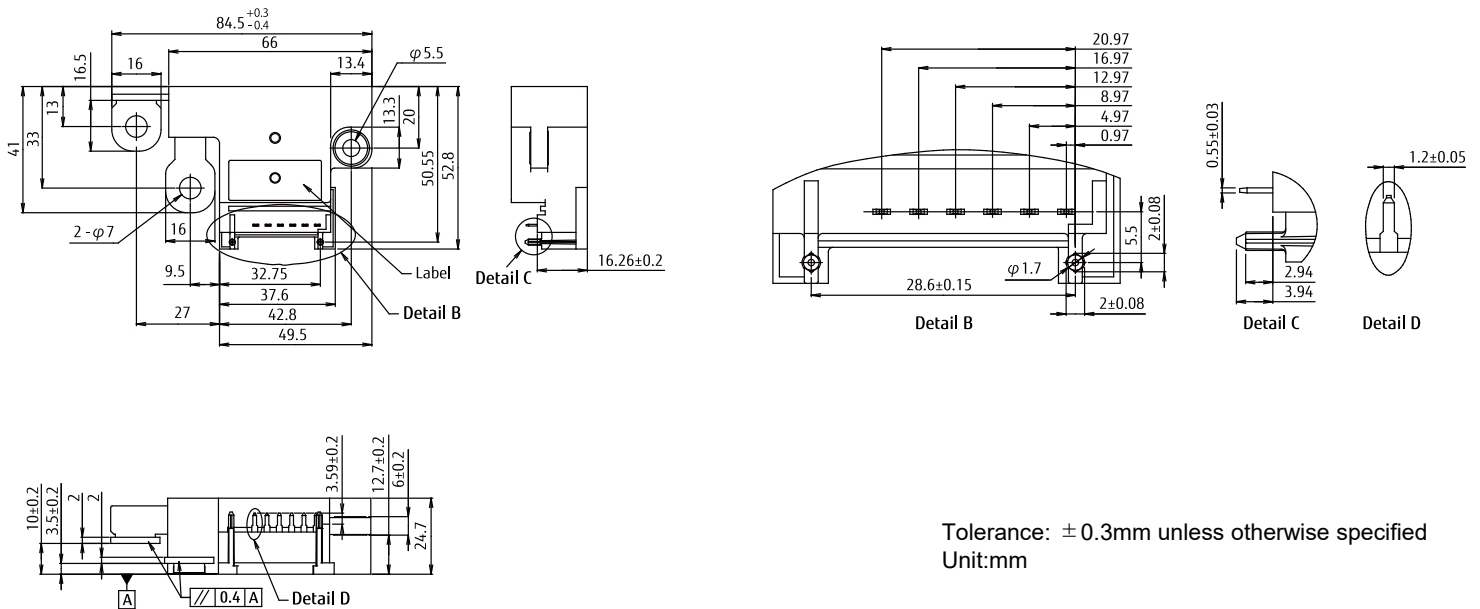

● Schematics (bottom view)

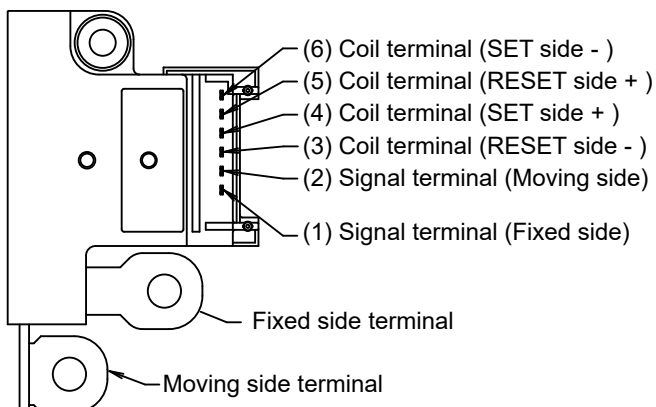

Circuit Diagram

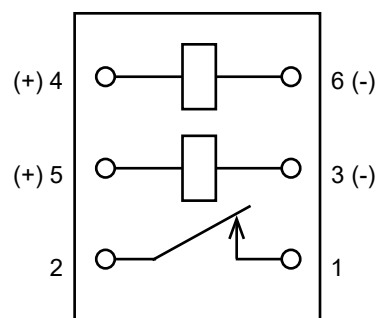

(number) : Terminal number, corresponds to numbers on circuit diagram


Unit:mm

FTR-V1 Series


■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line)


Maximum Carrying Current

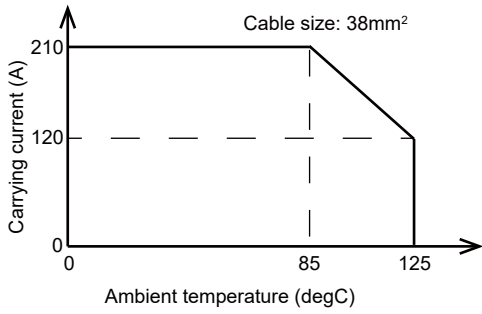


Distribution of set/reset voltage

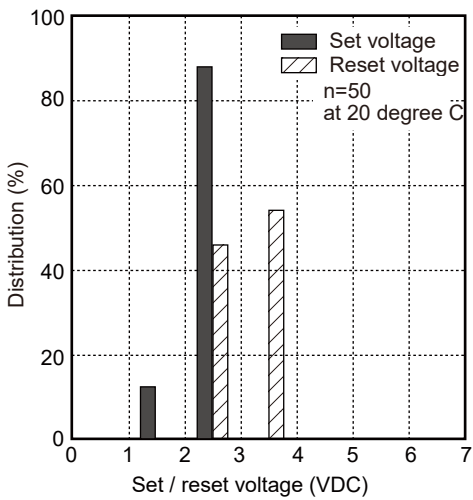


Distribution of contact voltage drop (contact resistance)

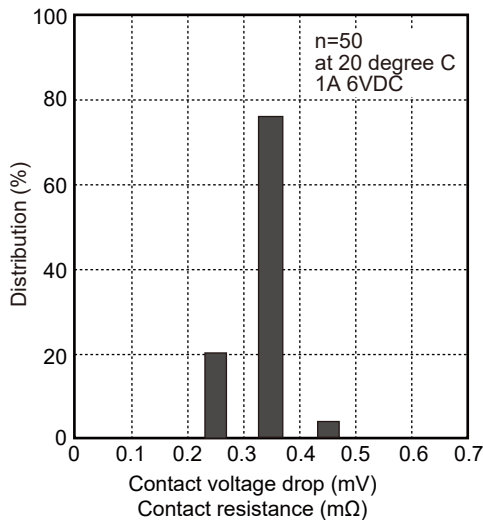


Distribution of set/reset time

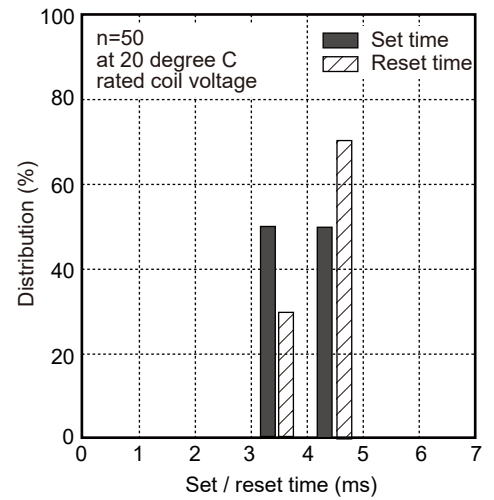

Shock resistance characteristics

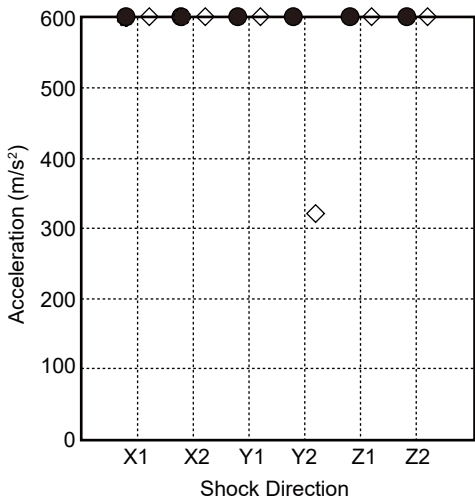

Half sine half wave pulse
 Shock application time: 11±1ms
 Detection level: chatter >1ms
 Shock direction: see below diagram

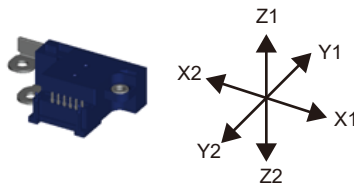

● : Set
 ◇ : Reset

FTR-V1 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

Notes for latching relays

- Latching relays are shipped in the state set, but state may change due to shock during transportation or mounting. Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence. Otherwise, it will or will not operate simultaneously with power activation.
- Please connect relay coils according to specified polarity.
- Do not apply voltage to both set coil and reset coil at a time.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C
within 90 sec.

Soldering: Dip within 5 sec. at 260°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron:

Temperature: Maximum 360°C

Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
