

POWER RELAY

1 POLE - 8A Polarized Latching Type

JSL Series

RoHS Compliant

■ FEATURES



- Small footprint
Width: 10mm
Height: 12.5mm
- High insulation
Insulation distance : 8.0 mm (between coil and contacts)
Dielectric strength : 5,000 VAC
Surge strength : 10,000 V
- Plastic materials
UL 94 flame class V-0
- RoHS compliant



■ APPLICATIONS

Smart meter, power saving equipment etc.

■ PART NUMBERS

[Example] JS L - D 12 M N - K
(a) (b) (c) (d) (e) (f) (g)

(a)	Relay type	JS series
(b)	Operating function	L : Latching
(c)	Coil type	Nil : 1 coil D : 2 coils
(d)	Coil rated voltage	12 : 3...24VDC See coil rating table
(e)	Contact configuration	Nil : 1c (1 Form C) M : 1a (1 Form A)
(f)	Contact material	N : AgSnO ₂ + Au plated
(g)	Sealed type	K : Plastic sealed type

Note: Actual marking omits the hyphen (-) .

■ SPECIFICATIONS

Item		Specifications		Remarks/Conditions
		JSL (1 coil)	JSL-D (2 coils)	
Contact	Configuration	1c (1 Form C), 1a (1 Form A)		
Data	Construction	Single		
	Material	AgSnO ₂ + Au plated		
	Resistance	Max. 100mΩ at 6VDC, 1A		
	Contact rating	8A, 250VAC / 24VDC		Resistive
	Max. carrying current	10A		
	Max. switching voltage	400VAC / 150VDC		
	Max. switching power	2000VA / 192W		
	Max. switching current	10A		
	Min. switching load ^{*1}	100 mA, 5VDC		
	Coil	Rated power (20°C)	220 to 290mW	480mW
Operating temperature range		-40°C to +85°C (at rated voltage)		No frost
Time	Set/reset (at nominal coil voltage)	Max. 10ms		Without bounce, no diode
	Applied pulse width	20ms to 1,000ms		
Life	Mechanical	Min. 5 x 10 ⁶ operations		
	Electrical (resistive)	Min. 50 x 10 ³ operations		At rated load
Insulation	Insulation resistance		Min. 1000MΩ at 500VDC	
	Dielectric strength	Open contacts	1000VAC (50/60Hz), 1 minute	
		Coil to contact	5000VAC (50/60Hz), 1 minute	
	Surge strength	Coil-contact	10000V / 1.2 x 50μs standard wave	
Clearance / Creepage		8mm / 8mm		
Others	Vibration resistance	Misoperation	10Hz to 55Hz to 10Hz single amplitude 1mm	
		Endurance	10Hz to 55Hz to 10Hz single amplitude 1.5mm	
	Shock resistance	Misoperation	Min. 100m/s ² (11 ± 1ms)	
		Endurance	Min. 1,000m/s ² (6 ± 1ms)	
	Dimensions / Weight		10.0 x 29.0 x 12.5 mm / approx. 8.0g	
	Sealing		Plastic sealed	

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels

■ COIL DATA

Coil code	Coil rated voltage (VDC)	1 coil			2 coils		
		Coil resistance (Ω $\pm 10\%$)	Set/reset voltage ^{*1} (VDC)	Max. applicable voltage ^{*1} (VDC)	Coil resistance (Ω $\pm 10\%$)	Set/reset voltage ^{*1} (VDC)	Max. applicable voltage ^{*1} (VDC)
3	3	41	2.4	5.4	19	2.4	5.4
5	5	114	4.0	9.0	53	4.0	9.0
12	12	655	9.6	21.2	300	9.6	21.2
24	24	2,304	19.2	42.2	1,200	19.2	42.2

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

*: Specified operated values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

■ COIL DATA

Type	Compliance	
UL	Flammability: UL 94-V0 (plastics)	
	UL standards File No. E56140	8A, 24 VDC (resistive)
CSA	CSA standards File No. No. LR40304	8A, 250VAC (resistive)
	VDE	IEC/EN standards File No 40013847


■ PART NUMBER LIST

Part number	Coil	Contact configuration	Contact material	Sealing
JSL-()MN-K	1 coil	1a (1 Form A)	AgSnO ₂ + Au plated	Plastic sealed
JSL-()N-K		1c (1 Form C)		
JSL-D()MN-K	2 coils	1a (1 Form A)	AgSnO ₂ + Au plated	Plastic sealed
JSL-D()N-K		1c (1 Form C)		


■ DIMENSIONS

JSL-M


- Dimensions

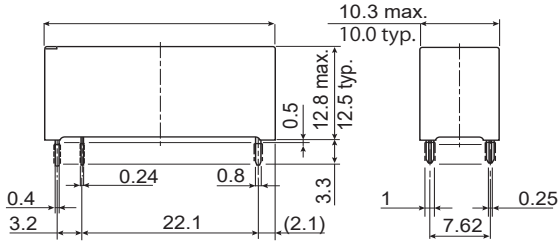

- Schematics (BOTTOM VIEW)




- PC board mounting layout (BOTTOM VIEW)

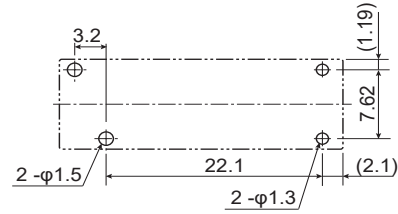


JSL


- Dimensions

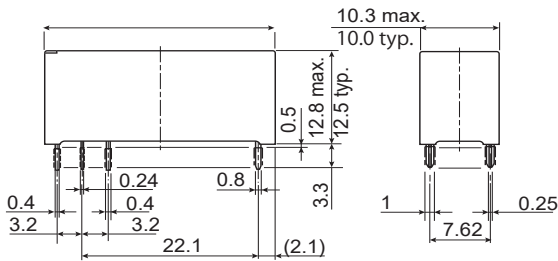

- Schematics (BOTTOM VIEW)




- PC board mounting layout (BOTTOM VIEW)

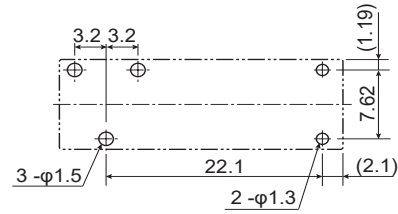


JSL-DM


- Dimensions

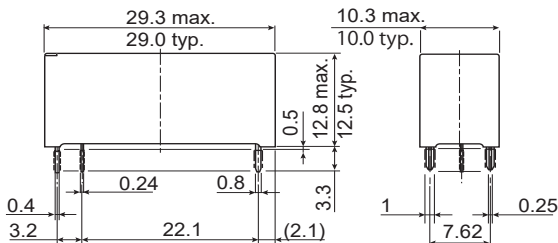

- Schematics (BOTTOM VIEW)




- PC board mounting layout (BOTTOM VIEW)

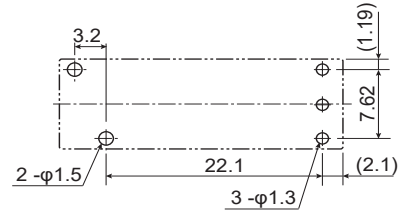


JSL-D


- Dimensions

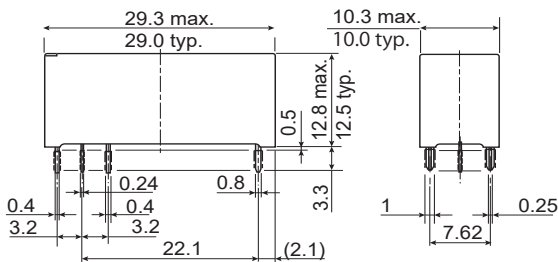

- Schematics (BOTTOM VIEW)



- PC board mounting layout (BOTTOM VIEW)

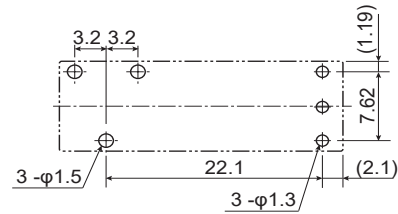

* Dimensions of the terminals do not include thickness of pre-solder.







* Schematics: +/- = Set, (+)/(-) = Reset

* Tolerance of PC board mounting hole layout : ±0.1 unless otherwise specified.

Unit: mm

CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

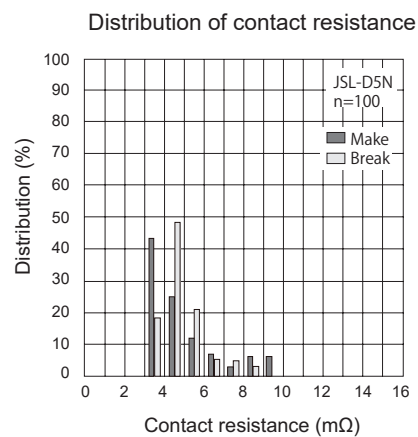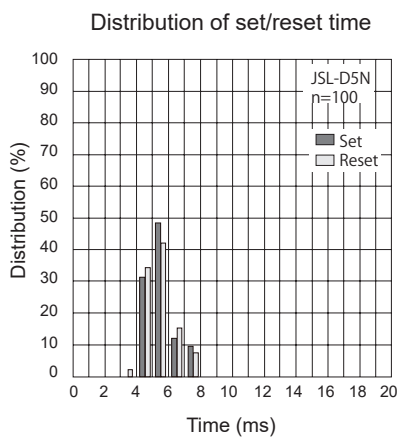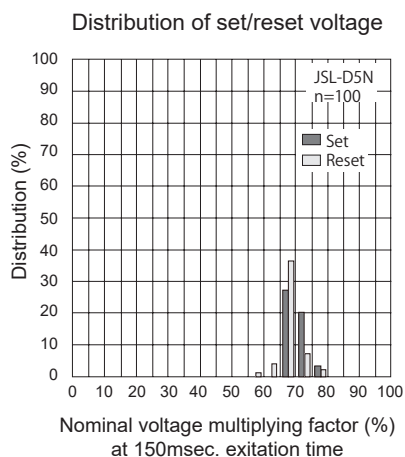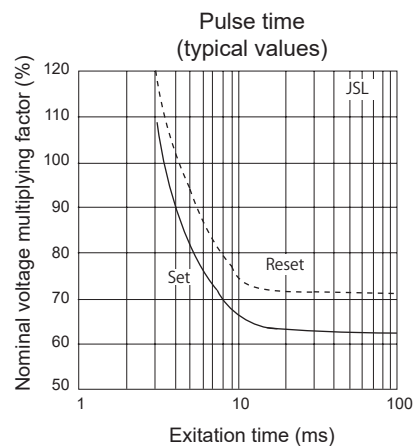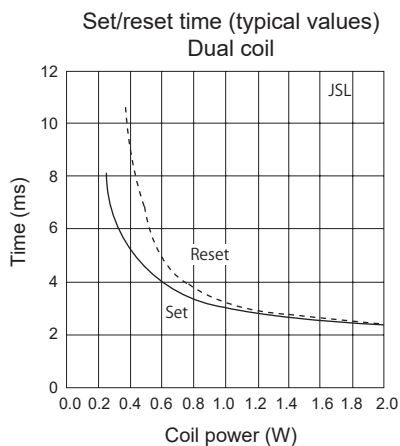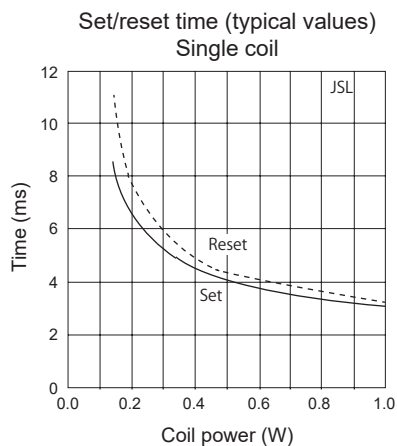

REFERENCE DATA

Version	1 coil		2 coils		
Terminal No.	3	5	3	4	5
Set	-	+		-	+
Reset	+	-	+	-	

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

Notes for latching relays

- Latching relays are shipped in the state set, but state may change due to shock during transportation or mounting. Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence. Otherwise, it will or will not operate simultaneously with power activation.
- Please connect relay coils according to specified polarity.
- Do not apply voltage to both set coil and reset coil at a time.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C
within 90 sec.
Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W
Temperature: Maximum 350-360°C
Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO.,LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai
200070, China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Hong Kong

FCL COMPONENTS HONG KONG CO.,
LIMITED
Unit 2313, Seapower Tower, Concordia
Plaza, No.1 Science Museum Road,
TST, Kowloon, Hong Kong
Tel: +852-2881-8495
Email: fcal@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. September 9, 2024.