


# MINIATURE RELAY

## 1 POLE – 1 to 2A (For Signal Switching)

### SY Series

#### ■ FEATURES

- Very small size and light weight
- UL, CSA recognized
- Conforms to FCC rules and regulations part 68  
Dielectric strength 1000 VAC between coil and contacts  
Surge strength 1500 V
- High sensitivity
- Wide ambient temperature range (-30°C to +90°C)
- Wide operating range
- DIL pitch terminals
- Plastic sealed type
- RoHS compliant

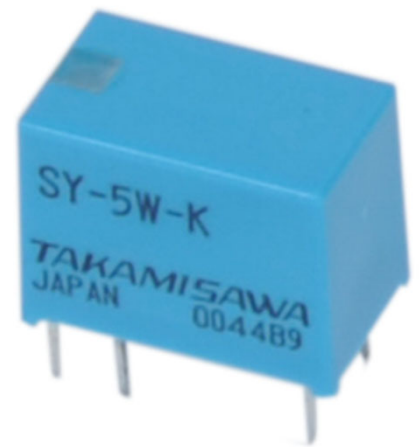

#### ■ PARTNUMBER INFORMATION

[Example]       $\frac{SY}{(a)}$  -  $\frac{12}{(b)}$   $\frac{W}{(c)}$  -  $\frac{0H}{(d)}$  -  $\frac{K}{(e)}$  -  $\frac{UL}{(f)}$

(a)	Relay type	SY	: SY Series
(b)	Coil rated voltage	012	: 5.....24VDC See coil rating table
(c)	Contact style	Nil W	: Single type : Bifurcated type
(d)	Options	Nil 0H HW	: Standard : Gold overlay on movable and stationary contact : Marking on top of relay
(e)	Enclosure	K	: Plastic sealed type
(f)	Approvals	Nil UL	: No UL/CSA marking on relay : UL/CSA marking on relay

Note: For movable and stationary contact with gold overlay type, add suffix “-0H” (zeroH)

# SY Series

## ■ SPECIFICATIONS

Item		SY-( )-K Single type	SY-( )W-K Bifurcated type	Remarks / Conditions
Contact data	Configuration	1 form C (SPDT)		
	Construction	Single (cross bar)	Bifurcated (cross bar)	
	Material	Gold overlay silver palladium		
	Resistance	Max. 100mOhm at 1A, 6VDC		Initial
	Contact rating	0.5A, 120VAC or 1A, 24VDC		Resistive
	Max. carrying current	2A		
	Max. switching current	1A		
	Max. switching voltage	120VAC / 60VDC		
	Max. switching power	60AV / 24W		
	Min. switching load *	1mA, 1VDC	0.1mA, 100mVDC	
	Capacitance (at 10 MHz)	Approx. 1.4 pF (between open contacts) Approx. 5.0 pF (between coil and contacts)		
Coil data	Rated power (at 20°C)	150 to 175 mW		
	Operate power (at 20°C)	75 to 86 mW		
	Operating temperature range	-30°C ~ +90°C (18V coil: +85°C, 24V coil: +80°C)		No frost
Timing data	Operate	Max. 5ms (without bounce)		At rated voltage
	Release	Max. 2ms (without bounce)		At rated voltage
Life	Mechanical	Min. 5 x 10 <sup>6</sup> operations		
	Electrical	Min. 100 x 10 <sup>3</sup> ops.		At contact rating
Insulation	Insulation resistance	Min. 1000MΩ at 500VDC	Min. 1000MΩ at 250VDC	Initial
	Dielectric strength	Open contacts	400VAC, 1 minute	300VAC, 1 minute
		Coil to contact	1000VAC, 1 minute	
Surge strength	Coil to contact	1,500V / 10 x 160μs standard wave		
Others	Vibration resistance	Misoperation ≥ 1μs	10 to 55Hz to 10hz, Single amplitude 0.75mm, 3 axis, 6 cycles	
		Endurance	10 to 55Hz to 10hz, Single amplitude 0.75mm, 3 axis, 6 hours	
	Shock resistance	Misoperation ≥ 1μs	Min. 300m/s <sup>2</sup> (11 ± 1ms)	
		Endurance	Min. 1,000m/s <sup>2</sup> (6 ± 1ms)	
	Dimensions / weight	7.4 x 12.5 x 9.5 mm / approx. 1.7g		

\* : Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions.

# SY Series

## ■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ ( $\Omega$ )	Must Operate Voltage * (VDC)	Must Release Voltage * (VDC)	Rated Power (mW)
1.5	1.5	15	1.05	0.08	150
3	3	60	2.1	0.15	
4.5	4.5	135	3.2	0.23	
5	5	167	3.5	0.25	
6	6	240	4.2	0.3	
9	9	540	6.3	0.45	
12	12	960	8.4	0.6	
18	18	1,940	12.6	0.9	170
24	24	3,290	16.8	1.2	175

Note: All values in the tables are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.

**!** Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.


## ■ SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL478 UL508	Flammability: UL 94-V0 (plastics)
	E45026	0.5A, 120VAC (resistive) 1A, 30VDC (resistive) 0.15A 48VDC (resistive)
CSA	C22.2 No. 14 LR35579	

# SY Series


## ■ DIMENSIONS

- Dimensions

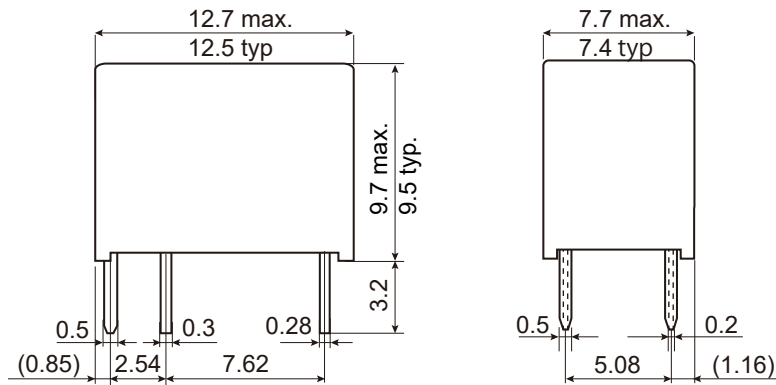


\*Dimensions of the terminals do not include thickness of pre-solder.

- Schematics  
(BOTTOM VIEW)



- PC Board Mounting Hole Layout  
(BOTTOM VIEW)

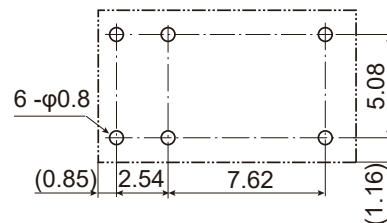

- \* Tolerance of PC board mounting hole layout:  $\pm 0.1$  unless otherwise specified.










( ): Reference value

Unit: mm

# SY Series

## CHARACTERISTIC DATA







(Characteristic data is not guaranteed value but measured values of samples from production line.)

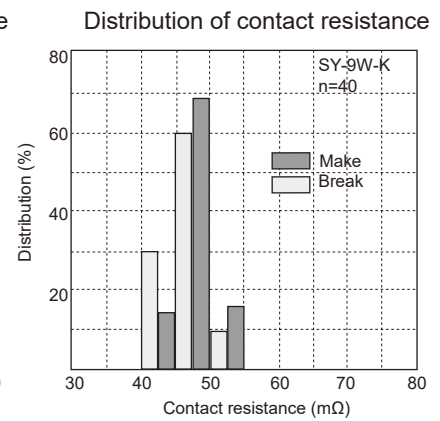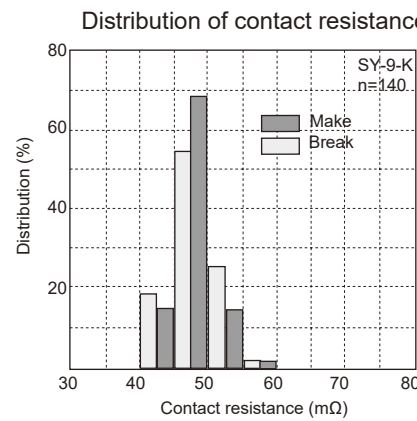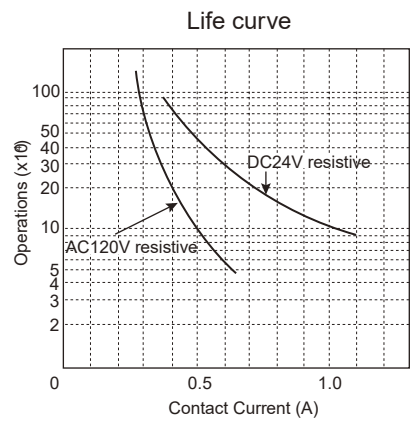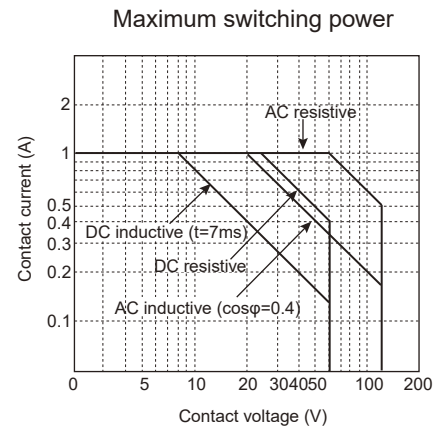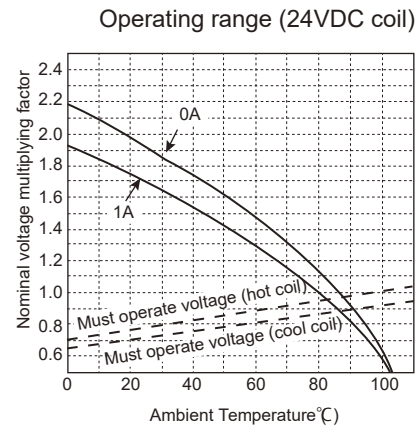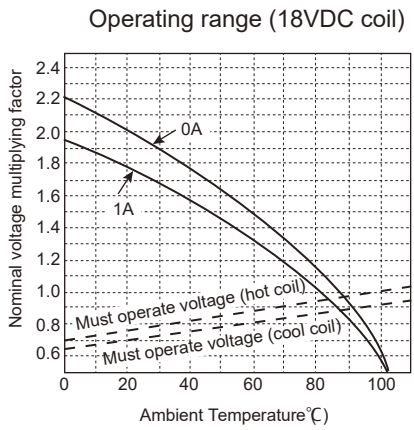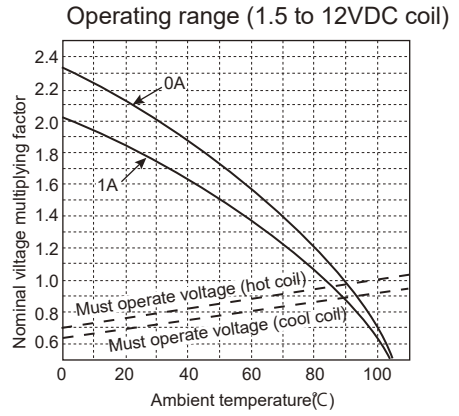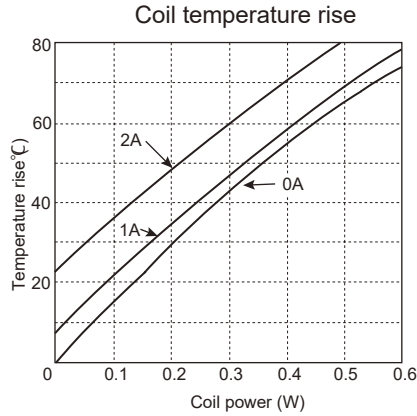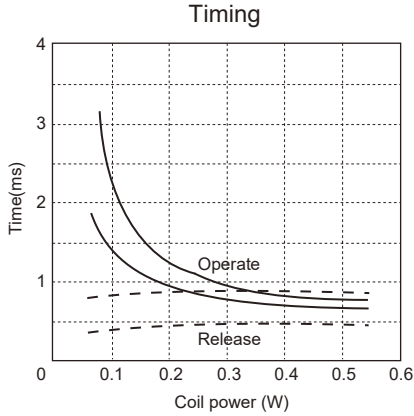

# SY Series

## ■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

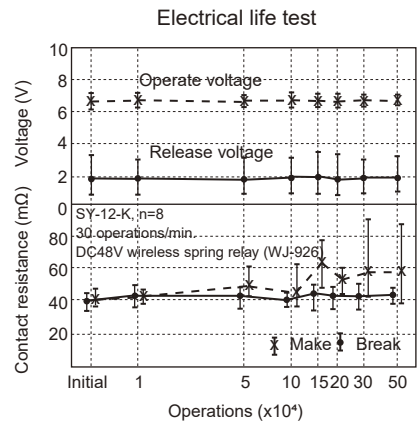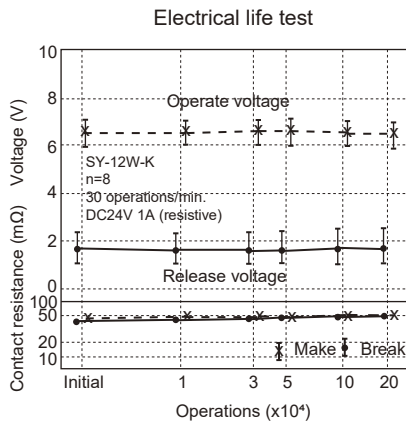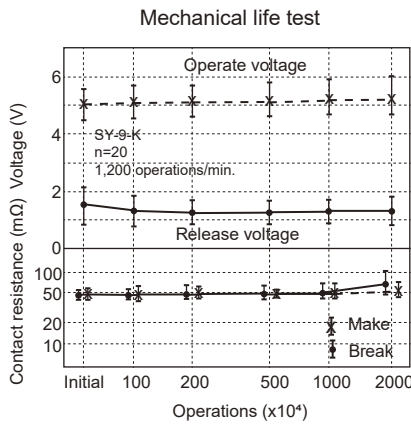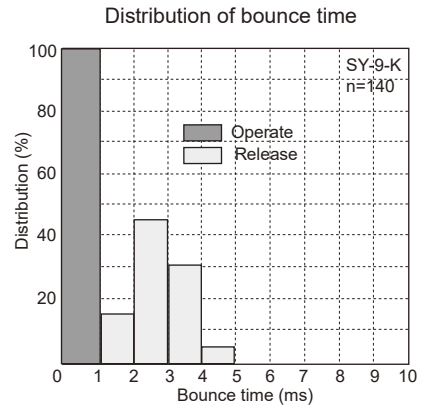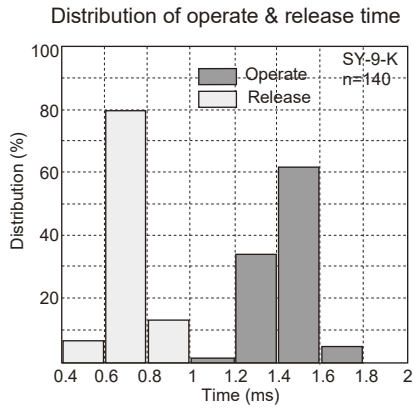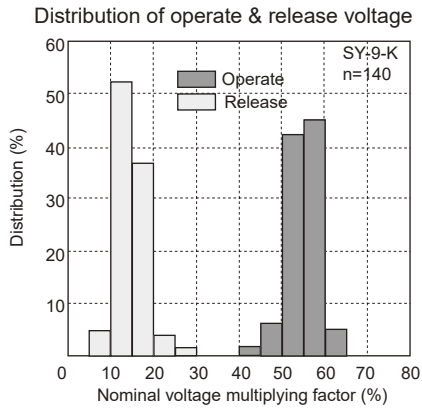

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## GENERAL INFORMATION

### 1. RoHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

---

## Contact

### Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: [fcl-contact@cs.fcl-components.com](mailto:fcl-contact@cs.fcl-components.com)

### North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: [fc.ai.components@fcl-components.com](mailto:fc.ai.components@fcl-components.com)

### Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: [info.fceu@cs.fcl-components.com](mailto:info.fceu@cs.fcl-components.com)

### Asia Pacific

FCL COMPONENTS ASIA PTE LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65-6375-8560  
Email: [fc.al@fcl-components.com](mailto:fc.al@fcl-components.com)

### China

FCL COMPONENTS (SHANGHAI) CO., LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai 200070,  
China  
Tel: +86-21-3253 0998  
Email: [fc.sh@fcl-components.com](mailto:fc.sh@fcl-components.com)

**Web:** [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

---

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.

---