

# FCL Components Thermal Printer FTP-628MCL101#80/103#80 series

FCL Components 2" high speed (up to 80mm/s) thermal printer mechanisms

---

## Overview

The ultra compact, high speed FTP-628MCL101#80/103#80 utilize 2" paper width (58mm) and provide a removable platen allowing for easy paper loading and maintenance.

The specially design platen roller allows the FTP-628MCL101#80/103#80 to be used for liner-less label applications in addition to it's normal receipt style applications like portable terminals, POS, ticket issuing terminals, banking, test and measurement and medical equipment.



FTP-628MCL103#80

## Features

- High-speed printing  
It can print up to 80mm/s (640 dotlines/s) maximum by using FCL Components' unique head drive control
- Easy loading type  
FCL Components' unique platen release mechanism allows for a straight paper path and easy head maintenance
- Liner-less label print  
Special platen roller prevents sticking by liner-less labels.
- Ultra compact  
Depth: 33.0mm, width: 70.2mm, height: 15.5mm
- High resolution  
8 dots/mm head provides clear print
- RoHS compliant

## ■ Part numbers

Item	Part Numbers	
Printer mechanism	FTP-628MCL101#80 without platen detect switch FTP-628MCL103#80 with platen detect switch	
LSI for driving	FTP-628CU311 *1	
Interface board*2	Serial/USB	FTP-628DSL311 *2
	Serial/USB	FTP-628DSL312 *2
Interface cable	Serial	FTP-628Y302
	USB	FTP-629Y301#01
Power supply cable	Logic, head, motor	FTP-628Y403

\*1: Applied energy is set for standard paper by default. Please adjust applied energy by energy adjustment command in the LSI when using with liner-less label.

\*2: Please see page 3 for basic interface board information. More detailed information can be obtained from your local FCL Components sales representative.

## ■ Specifications

Item	Specifications	
Part number	FTP-628MCL101#80	FTP-628MCL103#80
Printing method	Thermal sensitive line dot method	
Dot structure	384 dots/lines	
Dot pitch (horizontal)	0.125mm (8 dots/mm) - Dot density	
Dot pitch (vertical)	0.125mm (8 dots/mm) - Line feed pitch	
Effective printing area	48mm	
Paper width	58mm +0/-1	
Paper thickness	60-100 $\mu$ m (some paper in this range may not be used because of paper characteristics)	
Printing speed	Max. 80mm/s (640 dot lines/s) at 9.5V	
Power	For head	4.2VDC to 9.5VDC, 2.4A, at 25°C, concurrent applied dots: 64 dots, Rav=176 $\Omega$
	For printer motor	4.2VDC to 9.5VDC, 0.75A maximum (average 0.56A)
	For logic	3.3VDC $\pm$ 10% or 5VDC $\pm$ 10%, 0.1A maximum
Dimensions	Printer mechanism	70.2 x 33.0 x 15.5mm (WxDxH)
Weight	Printer mechanism	Approx. 40.2g
Expected life	Head	Pulse durability: 100 million pulse/dot (using FCL Components' standard driving method) Wear resistance: 50km (at 25% or less print ratio)
Environmental conditions	Operating temperature*	0°C to +50°C
	Operating humidity	20 to 85% RH (no condensation)
	Storage temperature	-20°C to +60°C (excluding paper)
	Storage humidity	5 to 95% RH (no condensation)
Detection functions	Head temperature	By thermistor
	Paper out/Mark detect	By photointerrupter
	Platen release/rocker arm detection	- By mechanical switch
Recommended thermal sensitive paper	Linerless paper	E623-404-J002 (Nakagawa paper)


\*: +5°C to 40°C printing density assurance range

■ Interface boards

Item	Specifications	
Part number	FTP-628DSL311	FTP-628DSL312
Power	4.2 to 9.5V	21.6 to 26.4V
Characteristic dimensions (W x H)	12 x 24 dots, 8 x 16 dots	
Character type	Alphanumeric, Kana, International and special, download character	
Interface	RS232C, USB	
Dimensions (W x D)	67.2 x 32 mm	


■ Dimensions

- Printer mechanism 2-inch

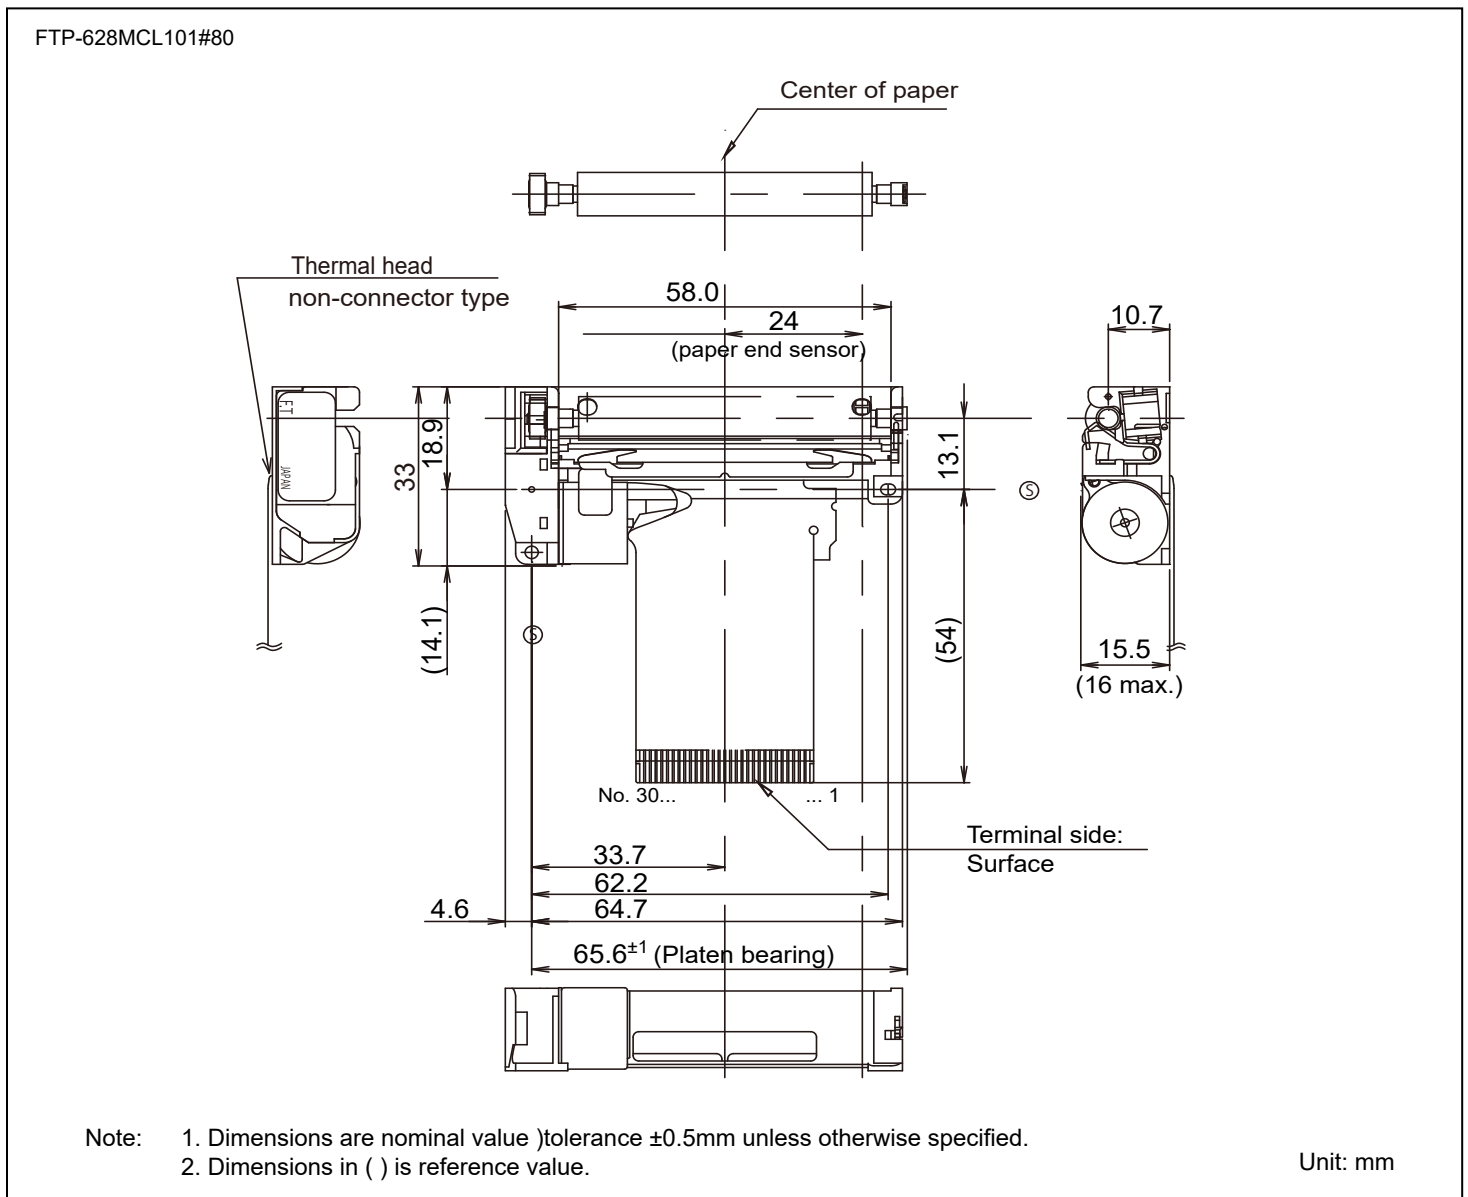

■ Dimensions

- Printer mechanism 2-inch

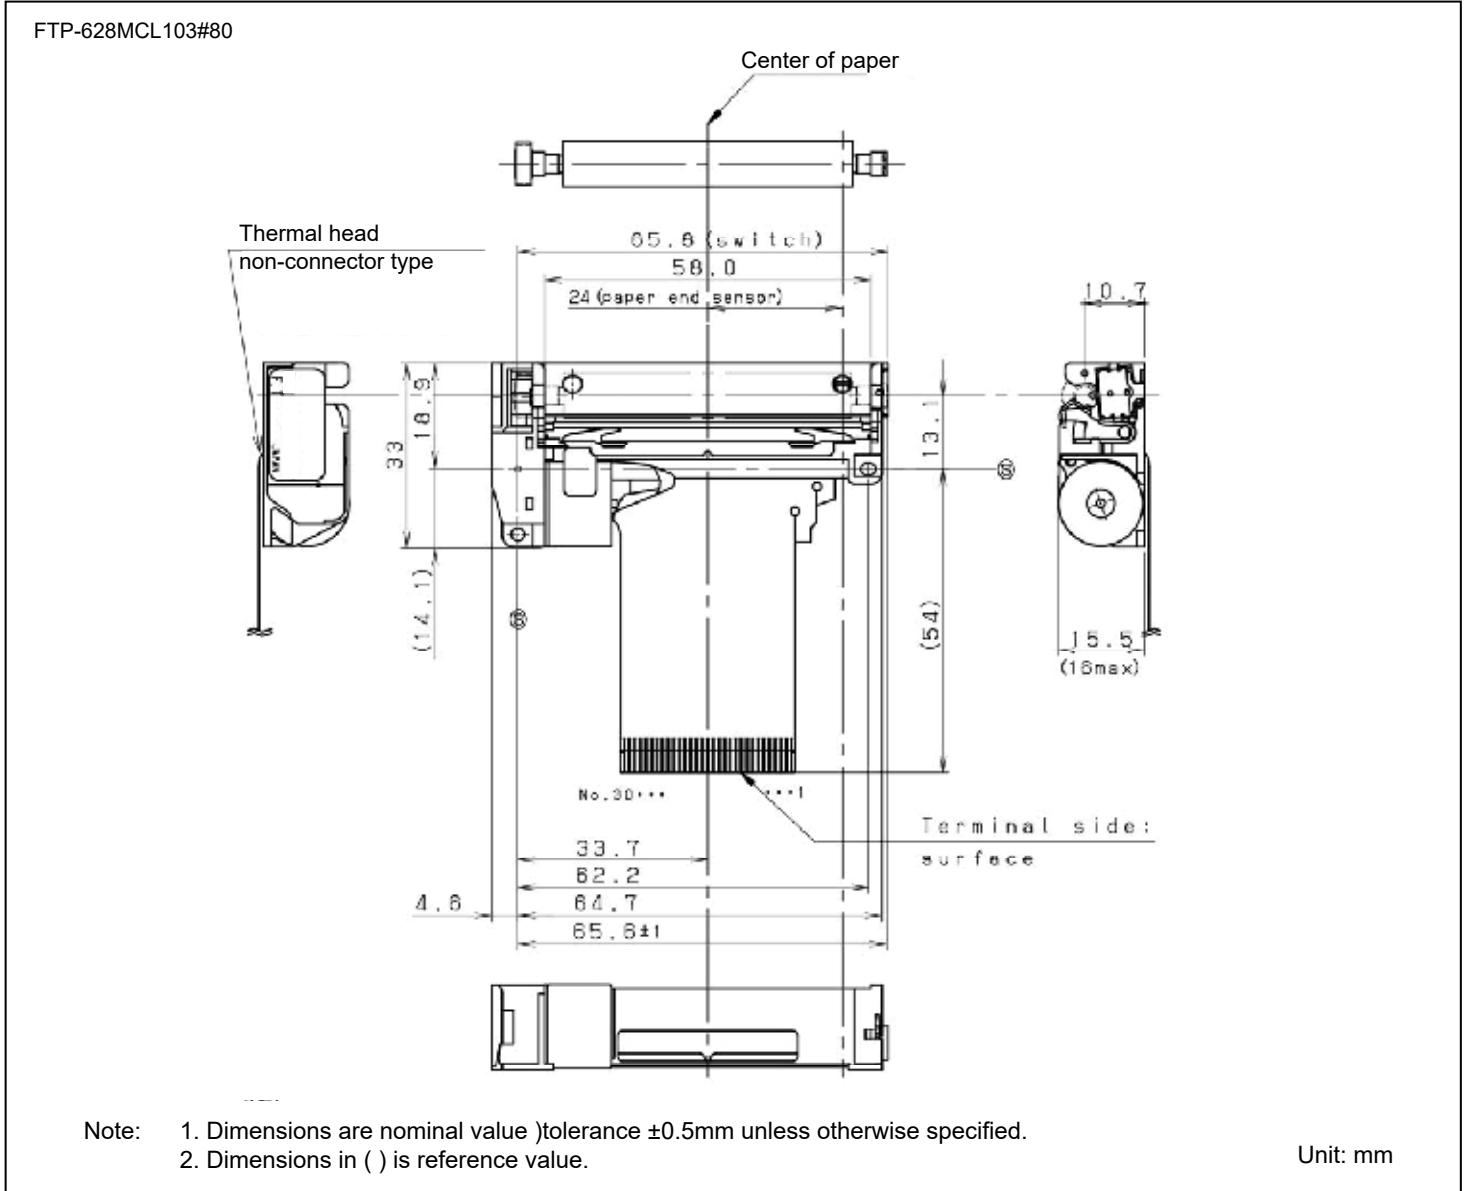

■ Connector pin assignments of printer mechanism (FPC)

No	Signal	Content	I/O	
			FTP-628MCL101#80	FTP-628MCL103#80
1	PHK	Cathode for photo interrupter	OUT	
2	VSEN	Paper sensor power	IN	
3	PHE	Emitter for photo interrupter	OUT	
4	SW	Platen release switch	-	OUT
5	SW	Platen release switch	-	OUT
6	COM	Head drive power	-	
7	COM	Head drive power	-	
8	SI	Data in	-	
9	CLK	Clock	IN	
10	GND	Head ground	-	
11	GND	Head ground	-	
12	STB6	Strobe6	IN	
13	STB5	Strobe5	IN	
14	STB4	Strobe4	IN	
15	VDD	Logic power	IN	
16	TM	Head thermistor	OUT	
17	TM	Head thermistor	OUT	
18	/STB3	/Strobe3	IN	
19	/STB2	/Strobe2	IN	
20	/STB1	/Strobe1	IN	
21	GND	Head ground	-	
22	GND	Head ground	-	
23	/LAT	/Data latch	IN	
24	SO	Data out	-	
25	COM	Head drive power	-	
26	COM	Head drive power	-	
27	MT_A	Excitation signal A	SINK/SOURCE	
28	MT_/A	Excitation signal /A	SINK/SOURCE	
29	MT_B	Excitation signal B	SINK/SOURCE	
30	MT_/B	Excitation signal /B	SINK/SOURCE	

**Contact**

**Japan**

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81 3 3450 1682  
Email: fcl-contact@cs.fcl-components.com

**Europe**

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: +31 23 5560910  
Email: info@fcl-components.eu

**China**

FCL COMPONENTS (SHANGHAI) CO., LTD.  
Unit 1105, Central Park –Jing An, No.329 Heng  
Feng Road, Shanghai 200070, China  
Tel: +86 021 3253 0998  
Email: fcsh@fcl-components.com

**North and South America**

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place, Suite 480  
San Jose, CA 95110 U.S.A.  
Tel: +1 408 745 4900  
Email: fcai.components@fcl-components.com

**Asia Pacific**

FCL COMPONENTS ASIA, LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65 6375 8560  
Email: fcal@fcl-components.com

**Hong Kong**

FCL COMPONENTS HONG KONG CO., LIMITED  
Room 13, 23/F, Seapower Tower, Concordia Plaza,  
No.1 Science Museum Road,  
Tsim Sha Tsui East, Kowloon, Hong Kong  
Tel: +852 2881 8495  
Email: fcsh@fcl-components.com

**Web:** [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

---

**Copyright**

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.

Copyright ©2024 FCL Components America, Inc. All rights reserved. Revised February 1, 2024.

---