

FCL COMPONENTS

BATTERY DRIVE, FTP-608 Series

2" HIGH SPEED THERMAL PRINTER

FTP-628 MCL751

Vertical Easy Loading Method

■ OVERVIEW

The easy loading FTP-608 MCL Series is ultra compact high speed, battery driven thermal printer, printing on 2-inch wide paper (58mm) where platens are removable. Our original platen removal mechanism improved paper loading and maintenance.

The FTP-608 MCL series can be used for a variety of applications, such as portable terminals, POS, ticket issuing terminals, label printers, banking terminals, and measurement and medical equipment.



FTP-628MCL751

■ HIGHLIGHTS

- **Easy loading type**
Our original platen removal mechanism improved paper loading and maintenance.
- **Ultra compact**
751: Height 32.5 mm, width 67.5 mm, depth 19.8 mm
- **High speed printing**
It can print at 80 mm/s (640 dotlines/s) maximum by using FCLComponents' unique head drive control.
- **High resolution printing**
8 dots/mm of resolution printing is possible.
- **RoHS compliant**

FTP-628MCL751

■ PART NUMBERS

Item		Part Number
Printer mechanism		FTP-628MCL751 (Serial and USB Interface board available)
LSI for driving		FTP-628CU601R
Interface board	USB	FTP-628DSL642R
	Serial	FTP-628DSL643R
Interface cables	USB	FTP-629Y301
	Serial	FTP-628Y302
Power cables	Logic, head, motor	FTP-628Y402

■ SPECIFICATIONS

Item		Specifications
Part number		FTP-628MCL751
Printing method		Thermal line dot method
Dot structure		384 dots/line
Dot pitch (horizontal)		0.125mm (8dots/mm) - Dot density
Dot pitch (vertical)		0.125mm (8dots/mm) - Line feed pitch
Effective printing area		48 mm
Number of columns		ANK 32 columns/line (maximum 12 x 24 dot font)
Paper width		58 mm +0/-1
Paper thickness		60 to 100µm (some paper may not be used because of characteristics)
Printing speed		Maximum 80mm/sec. (640 dot lines/sec.) 8.5V
Interface		FTP-628DSL600 series
Character types	Alphanumeric, katakana:	159 types
	International and special characters:	195 types
	OCRI	103 types
	OCRIII	23 types
	OCRIV	103 types
	Extended numeric	11 types
	JIS Kanji level 1, level 2, non-Kanji (supported only when Kanji CG is mounted)	about 6,800 types
Character, dimensions (WxH), number of columns	Half size	12 x 24 dots, (1.5 x 3.0 mm), 32 columns: ANK
	Full size	24 x 24 dots, (3.0 x 3.0 mm), 16 columns: ANK, Kanji
	Half size	8 x 16 dots, (1.0 x 1.0 mm), 48 columns: ANK
	Full size	16 x 16 dots, (2.0 x 2.0 mm), 24 columns: ANK, Kanji
	OCR I	24 x 40 dots, 16 columns
	OCR III	24 x 48 dots, 16 columns
	OCRIV	36 x 60 dots, 10 columns
Extended numeric	24 x 48 dots, 16 columns	

■ SPECIFICATIONS

Item		Specification			
		FTP-628MCL751			
Item		Conforms to RS232C/USB			
Operating Voltage	For print head		4.2 VDC to 8.5 V, average current 0.87A (0.98), peak value Printing ratio: 12.5%, printing speed 500mm/sec. at 7.2V		
	For motor		4.2 VDC to 8.5 V, 1 A maximum		
	For logic		3.0 to 5.25 VDC, 0.1 A maximum		
Dimensions	Printer mech	751	67.5 x 19.8 x 32.5 mm (WxDxH)		
	Interface board		70 x 52 x 20 mm (WxDxH)		
Weight	Printer mech	751	Approximately 46g		
	Interface board		Approximately 22g		
Head life			Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 25% or less)		
Operating environment	Operating temperature*		0°C to +50°C		
	Operating humidity		20 to 85% RH (no condensation)		
	Storage temperature		-20°C to +60°C (paper not included)		
	Storage humidity		5 to 95% RH (no condensation)		
Detection function	Head temperature detection		Detected by thermistor		
	Paper out/mark detection		Detected by photo-interruptor		
Recommended thermal sensitive paper			High sensitive paper	TF50KS-E2 (Nippon paper)	
			Standard paper		TF50KS-E2 (Nippon paper) PD150R (Oji paper) FTP-020P0701 (58mm)
			Medium life storage paper		TF60KS-F2 (Nippon paper) FTP-020P0102 (58mm) PD170R (Oji paper) AFP220VBB-1 (Mitsubishi paper)
			Long life storage paper		PD160R (Oji paper) AFP-235 (Mitsubishi paper) TP50KJ-R (Nippon paper) HA112AA (Nippon paper)


*+5°C to +40°C printing density assurance range (-25 to 70°C capability)

■ FUNCTION

	Item		Item
1.	Test print function	8.	Mark detection function
2.	Paper out detection	9.	MCU operation abnormality detection
3.	Paper near end detection	10.	Power ON/OFF sequence protection
4.	Thermal head temperature abnormality detection	11.	Motor over-current protection
5.	Blow-out fuse detection	12.	Hardware timer
6.	Head voltage abnormality detection		
7.	Motor power saving function		

■ DIMENSIONS

FTP-628MCL751

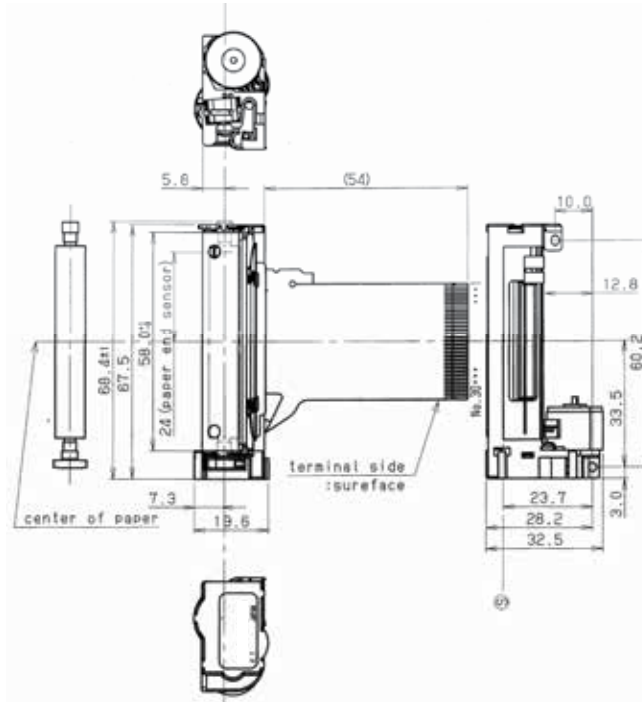

Notes:

1. The dimensions tolerance is $\pm 0.5\text{mm}$ unless specified.
2. Dimensions in parenthesis are reference dimensions.
3. S shows the platen center line.

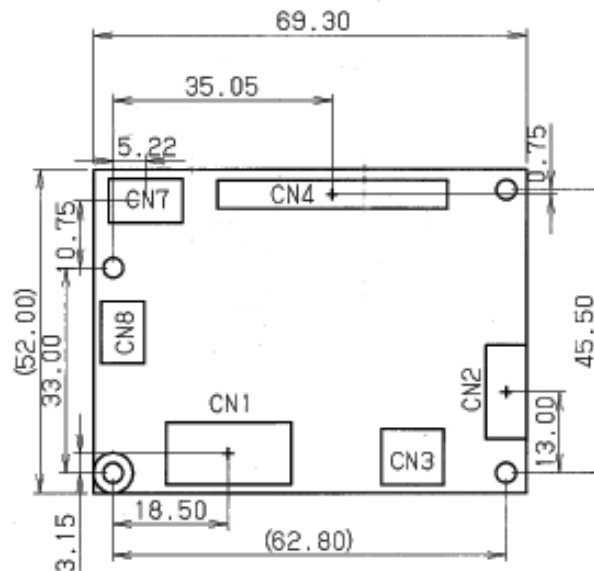


Fig-2 コネクタ配置図

■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS FTP-628 MCL751

Thermal head, control circuit side connector: 52610-3090 or 3071 Molex or equivalent product

No	Signal	I/O	Contents
1	PHK	—	Cathode for photo interruptor
2	VSEN	I	Paper sensor power
3	PHE	O	Emitter for photo interruptor
4	N.C.	—	Not connected
5	N.C.	—	Not connected
6	VH	I	Head drive power
7	VH	I	
8	DIN	I	Data in
9	CLK	I	Synchronous clock for communication
10	GND	—	Ground power supply for thermal head
11	GND	—	
12	STB6	I	Thermal head energizing control signal
13	STB5	I	
14	STB4	I	
15	VDD	I	Logic power
16	TH	O	Thermally sensitive resistor input terminal 1
17	TH	O	Thermally sensitive resistor input terminal 2
18	STB3	I	Thermal head energizing control signal
19	STB2	I	
20	STB1	I	
21	GND	—	Ground power supply for thermal head
22	GND	—	
23	$\overline{\text{LAT}}$	I	Data latch
24	DO	O	Data out
25	VH	I	Power supply for thermal head
26	VH	I	
27	MT A	I	Stepping motor excitation signal
28	$\overline{\text{MT A}}$	I	
29	MT B	I	
30	$\overline{\text{MT B}}$	I	

FTP-628MCL751

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81 3 3450 1682
Email: fcl-contact@cs.fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: +31 23 5560910
Email: info@fcl-components.eu

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park –Jing An, No.329 Heng
Feng Road, Shanghai 200070, China
Tel: +86 021 3253 0998
Email: fcsh@fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place, Suite 480
San Jose, CA 95110 U.S.A.
Tel: +1 408 745 4900
Email: fcai.components@fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA, LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65 6375 8560
Email: fcal@fcl-components.com

Hong Kong

FCL COMPONENTS HONG KONG CO., LIMITED
Room 13, 23/F, Seapower Tower, Concordia Plaza,
No.1 Science Museum Road,
Tsim Sha Tsui East, Kowloon, Hong Kong
Tel: +852 2881 8495
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

Copyright

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.

Copyright ©2024 FCL Components America, Inc. All rights reserved. Revised February 1, 2024.
