

FCL Components Thermal Printer FTP-629DSL311 Interface Board

FCL Components interface board for 24V FTP-6xGMCL series

Features

- USB Ver. 2.0 (full speed) and RS-232C (max. 230.4kbps) serial interface
- Supports alphanumeric, Kanji, Kana, Thai, Traditional Chinese, registration of image patterns, various barcode printing
- Drivers Windows Vista® Windows® 7, 8, 10
- RoHS compliant



■ Part numbers

Part number	Supply voltage	Interface type	Mechanism part number
FTP-629DSL311	24V	USB Ver. 2.0 RS-232C	FTP-629MCL series FTP-639 MCL series

■ Interface specification at host side

Item	Specifications	
USB V2.0	Transmission rate: Data Input/Output method:	Full speed 12Mbps max. Differential
RS-232C	Data speed: Synchronous method: Handshake: Output level:	9,600, <u>19,200</u> , 38,400, 115,200, 230,400 bps* Asynchronous, full-duplex communication <u>RTS (DTR) / CTS (DSR) control</u> , XON/XOFF control* RS-232C level

Notes: *Changeable settings by command
Underline indicates default setting

■ Accessories (optional)

Item	Part number	Connector	Length
Interface cable*	USB	FTP-629Y301#01	USB A - USB mini B
	RS-232C	FTP-628Y302	ZHR-8 (J.S.T.) Connector equipped at one side
Power supply cable*	FTP-629Y603	VHR-2 (J.S.T.) Connector equipped at one side	

Note: *Cables are RoHS compliant

■ Specifications


1.1 Base specifications

Item	Specifications
Dimensions	82×45×17.2 mm
Weight	Approx. 20g
Communication interface *1	RS-232C USB full speed (max. 12Mbps)

1.2 Print/paper feed specifications

Item	Specifications	
Part number	FTP-629DSL311	
Power supply	24VDC ±10%	
Printing speed	Max. 200mm/sec.	
Printing specifications	Printing mode	Line mode, page mode
	Character types	Kanji, non-kanji: 6,879 Traditional Chinese: 13,503 Alphanumeric and katakana: 159 International and special characters: 195, OCR: 229 Enlarged characters: 12 External characters: 94 Download: 224
	Character structure *1	8×16 dots, 12×24 dots, 16×16 dots, 24×24 dots, 24×40 dots, 24×48 dots, 36×60 dots
	Barcode	1D UPC-A, UPC-E, JAN(EAN)13, JAN(EAN)8, CODE39 ITF, CODABAR, CODE128, GS1 DataBar-14, GS1 DataBar-14 Truncated, GS1 DataBar Limited
		2D QR code, PDF417, GS1 DataBar-14 stacked, GS1 DataBar-14 Omnidirectional, GS1 DataBar-14 Expanded
	Bit image	Size Horizontal: 8 to 432 dots (2-inch), 8 to 576 dots (3-inch), 8 to 640 dots (640 dots type), vertical: 1 to 1023 dots
		Modification Black-white reversed
	Download image	Size Horizontal: 8 to 432 dots (2-inch), 8 to 576 dots (3-inch), 8 to 640 dots (640 dots type) Vertical: 1 to 512 dots
		Modification Black-white reversed, double width size, double height size, quadruple size, upside down
	Detection function	Mark, paper, near end, power supply irregularity, platen open, cutter irregularity, transmission data irregularity, hardware irregularity, MCU operation irregularity, fuse blow, thermal head's thermal runaway, thermal head's cable disconnection, non-volatile memory irregularity, RAM irregularity, motor temperature irregularity
Environment	Operating temperature/humidity	0 to 50°C (guarantee: +5 to +40°C, with FCL Components' recommended thermal paper) 20 to 85%RH (No condensation)
	Storage temperature/humidity	-20 to +60°C (excluding paper), 5 to 90%RH (No condensation)

■ Dimensions

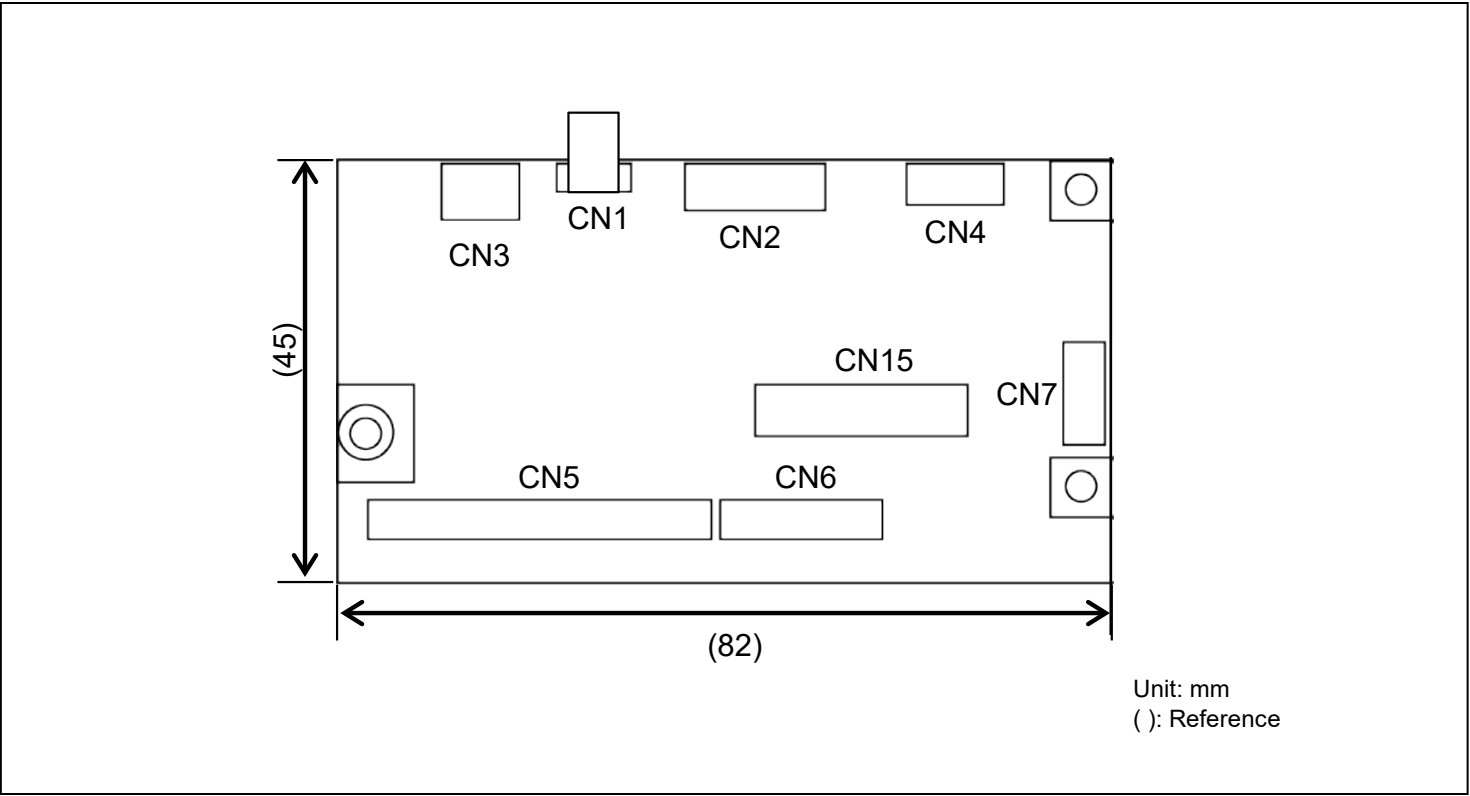

■ Control circuit board and connector types

Symbol	Name	Function
CN1	Power supply connector	To connect +24V power supply
CN2	RS-232C I/F connector	To connect RS-232C interface
CN3	USB I/F connector	To connect USB interface
CN4	Near end connector	To connect near end sensor
CN5	Printer mechnism connector	To connect mechanism
CN6	Printer mechnism connector	To connect mechanism (Head/paper sensor)
CN7	Cutter connector	To connect cutter
CN15	Printer mechanism wire harness connector	To connect printer mechanism and harness

■ Connector Pin Assignment of interface board

Note: Symbol “-” means a negative logic signal.
 “I” or “O” means a signal direction from the interface board side.(I: input, O: output)
 Equipped connectors may be changed. Please check carefully when using equivalent connectors.

- Power supply connector (CN1)

Mating connector part number: VHR-2N (J.S.T.) or equivalent

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	Vp	I	Power input	2	GND	I	Ground

- RS-232C connector (CN2)

Mating connector part number: ZHR-8 (J.S.T.) or equivalent

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	RXD	I	Receive data signal	2	TXD	O	Transmission data signal
3	RTS	O	Request to send signal	4	GND	-	Signal ground
5	CTS	I	Clear to send signal	6	/SIN	I	Detection function setting signal
7	/RST	I	Initialization request signal	8	/ATF	I	Feed input signal

- USB connector (CN3)

Mating connector part number: USB mini-B type

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	Vbus	I	Vbus signal	2	D-	I/O	D- signal
3	D+	I/O	D+ signal	4	NC	-	Not connected
5	GND	-	Ground	Shell	FG	-	Frame ground

- Near end connector (CN4)

Mating connector part number: PHR-3 (J.S.T.) or equivalent

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	NVCC	O	Near end sensor power	2	/NES	I	Near end signal input
3	NSEK	-	Near end sensor cathode				

- Printer mechanism connector (CN5/CN6)

Pin array: See the printer mechanism specifications.

- Printer mechanism connector (CN7)

Pin array: See the printer mechanism specifications.

- Printer mechanism wire harness connector (CN15)
Mating connector part number: SHDR-40V-S-B (J.S.T.) or equivalent

No.	Signal	I/O	Content	No	Signal	I/O	Content
1	SW	I	Platen open switch terminal	2	SW	I	Platen open switch terminal
3	VH	-	Head drive power	4	VH	-	Head drive power
5	VH	-	Head drive power	6	VH	-	Head drive power
7	DO	O	Head data output terminal	8	629: /STB2	O	Head strobe terminal
					639: /STB3		
					639 (640): STB2		
9	629: /STB2	O	Head strobe terminal	10	VDD	-	Logic power
	639: /STB3						
	639 (640): N.C.						
11	HTM (GND)	-	Head thermistor terminal	12	GND	-	Ground
13	GND	-	Ground	14	GND	-	Ground
15	GND	-	Ground	16	GND	-	Ground
17	GND	-	Ground	18	GND	-	Ground
19	GND	-	Ground	20	GND	-	Ground
21	HTM	1	Head thermistor terminal	22	/STB1	O	Head strobe terminal
23	629: N.C.	O	Head strobe terminal	24	/LAT	O	Head data terminal latch
	639: /STB2						
	639 (640): N.C.						
25	CLK	O	Head data clock terminal	26	DI	I	Head data input terminal
27	VH	-	Head drive power	28	VH	-	Head drive power
29	VH	-	Head drive power	30	VH	-	Head drive power
31	NC	-	No connected	32	MTM	I	Motor thermistor terminal
33	MTM (GND)	-	Motor thermistor terminal	34	MT A	I/O	Excitation signal A
35	MT/A	I/O	Excitation signal /A	36	MT B	I/O	Excitation signal B
37	MT/B	I/O	Excitation signal /B	38	PHK	I	Paper sensor cathode terminal
39	VSEN	-	Paper sensor power	40	PHE	I	Paper sensor emitter terminal

Contact

Japan FCL COMPONENTS LIMITED Shinagawa Seaside Park Tower 12-4, Higashi-shinagawa 4-chome, Tokyo 140 0002, Japan Tel: +81 3 3450 1682 Email: fcl-contact@cs.fcl-components.com	Europe FCL COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: +31 23 5560910 Email: info@fcl-components.eu	China FCL COMPONENTS (SHANGHAI) CO., LTD. Unit 1105, Central Park –Jing An, No.329 Heng Feng Road, Shanghai 200070, China Tel: +86 021 3253 0998 Email: fcsh@fcl-components.com
North and South America FCL COMPONENTS AMERICA, INC. 2055 Gateway Place, Suite 480 San Jose, CA 95110 U.S.A. Tel: +1 408 745 4900 Email: fcai.components@fcl-components.com	Asia Pacific FCL COMPONENTS ASIA, LTD. No. 20 Harbour Drive, #07-01B Singapore 117612 Tel: +65 6375 8560 Email: fcal@fcl-components.com	Hong Kong FCL CCOMPONENTS HONG KONG Co., LIMITED Room 13, 23/F, Seapower Tower, Concordia Plaza, No.1 Science Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong Tel: +852 2881 8495 Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

Copyright

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Copyright ©2024 FCL Components America, Inc. All rights reserved. Revised May 20, 2024.