

FCL COMPONENTS

BATTERY DRIVE, FTP-60D Series 2” HIGH SPEED THERMAL PRINTER

FTP-62DMCL101#02/111#02, Easy Loading Method

■ OVERVIEW

The 2-inch (58mm), FTP-62DMCL series is an ultra compact, low voltage thermal printer mechanism with a removable platen for easy paper loading and maintenance.

The FTP-62D MCL series can be used for a variety of low voltage applications, such as portable terminals, POS, banking terminals, and measurement and medical equipment.



FTP-62D series

■ HIGHLIGHTS

- **Easy loading type**
Our unique removable platen mechanism improves paper loading and maintenance, providing a better customer experience
- **Ultra compact**
The compact design (19mm x 69.5mm x 46mm) allows you to reduce the overall footprint of you design
- **High speed printing**
Print at 100mm/s (at 9.5VDC) maximum
Print at 75mm/s (at 7.2 VDC) maximum
- **High resolution printing**
8 dots/mm of resolution printing is possible
- **Straight paper path**
- **RoHS compliant**

FTP-62DMCL101#02/111#02

■ PART NUMBERS

Item	Part number	
Printers	FTP-62DMCL101#02 (FPC length 38mm) without platen detect switch FTP-62DMCL111#02 (FPC length 65mm) without platen detect switch	
LSI for driving	FTP-62DCU001	
Interface boards	USB/RS-232C	FTP-62DDSL001-R
Interface cables	USB	FTP-62GY301
Power cable (head, motor, logic) & RS232C interface cable	FTP-62DY001-12	
Platen replacement	FTP-62DMP0221	

■ SPECIFICATIONS

Item	Specifications
Part number	FTP-62DMCL101#02/111#02
Printing method	Thermal-line dot method
Dot structure	384 dots/line
Dot pitch (Horizontal)	0.125 mm (8 dots/mm)—Dot density
Dot pitch (Vertical)	0.125 mm (8 dots/mm)—Line feed pitch
Effective printing area	48 mm
Number of columns	ANK 32 columns/line (maximum 12x 24 dot font)
Paper width	58 mm ⁺⁰ ₋₁
Paper thickness	60 to 85 μm (some paper in this range may not be used because of paper characteristics)
Printing Speed	Maximum 100mm/sec. (800 dot line/sec.) at 9.5V*1 Maximum 75mm/sec. (600 dot line/sec.) at 7.2V*2
Character types	Alphanumeric, katakana: 159 types International and special characters: 195 types
Character, dimensions (H×W), number of columns	12 × 24 dots, (1.5 × 3.0mm), 32 columns: ANK 8 × 16 dots, (1.0 × 2.0 mm), 48 columns: ANK 8 × 6 dots, 48 columns: International 12 × 24 dots, (1.5 × 3.0 mm), 32 columns: International

Notes:

*1: Head voltage 9.5V, ambient temperature 25°C, concurrent applied dots 64 dots maximum, applied energy S.L.T. =1.25msec., E0Maz=0.235mJ/dot maximum, use PD150R (Oji Paper)

*2 Head voltage 7.2V, ambient temperature 25°C, concurrent applied dots 64 dots maximum, applied energy S.L.T. =1.67msec., E0Maz=0.27mJ/dot maximum, use PD150R (Oji Paper)

FTP-62DMCL101#02/111#02

■ SPECIFICATIONS

Item		Specification	
		FTP-62DMCL101#02/111#02	
Interface		Conforms to RS232C / USB	
Operating Voltage	For print head	4.2 VDC to 9.5 V, approx. 2.3A at 25°C, rav=176Ω, concurrently electrified with 64 dots	
	For motor	4.2 to 9.5VDC, 1A maximum	
	For logic	3.3VDC ±10% or 5VDC±10%, 0.1 A maximum	
Dimensions	Printer mechanism	69.5 x 46 x 19mm (WxDxH)	
	Interface board	33 x 24mm	
Weight	Printer mechanism	Approximately 31g	
	Interface board	Approximately 5g	
Head life		Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 12.5 % or less)	
Operating environment	Operating temperature*	0°C to +50°C	
	Operating humidity	20 to 85% RH (no condensation)	
	Storage temperature	-20°C to +60°C (paper not included)	
	Storage humidity	5 to 95% RH (no condensation)	
Detection function	Head temperature detection	Detected by thermistor	
	Paper out/mark detection	Detected by photo-interrupter	
Recommended thermal sensitive paper		High sensitive paper:	TF50KS-E4 (Nippon Paper)
		Standard paper	TK60KS-E (Nippon Paper) PD150R (Oji Paper)
		Medium life storage paper	TK60KS-F1 (Nippon Paper) PD170R (Oji Paper) P220VBB-1 (Mitsubishi Paper)
		Long life storage paper	PD160R-N (Oji Paper)

*+5°C to +40°C printing density assurance range (-25 to 70°C capability)


FTP-62DMCL101#02/111#02

FUNCTION

Item	Item
1. Test print function	8. Mark detection function
2. Paper out detection	9. MCU operation abnormality detection
3. Paper near end detection	10. Power ON/OFF sequence protection
4. Thermal head temperature abnormality detection	11. Motor over-current protection
5. Blow-out fuse detection	12. Hardware timer
6. Head voltage abnormality detection	
7. Motor power saving function	

DIMENSIONS

1. Printer mechanism: 2- inch

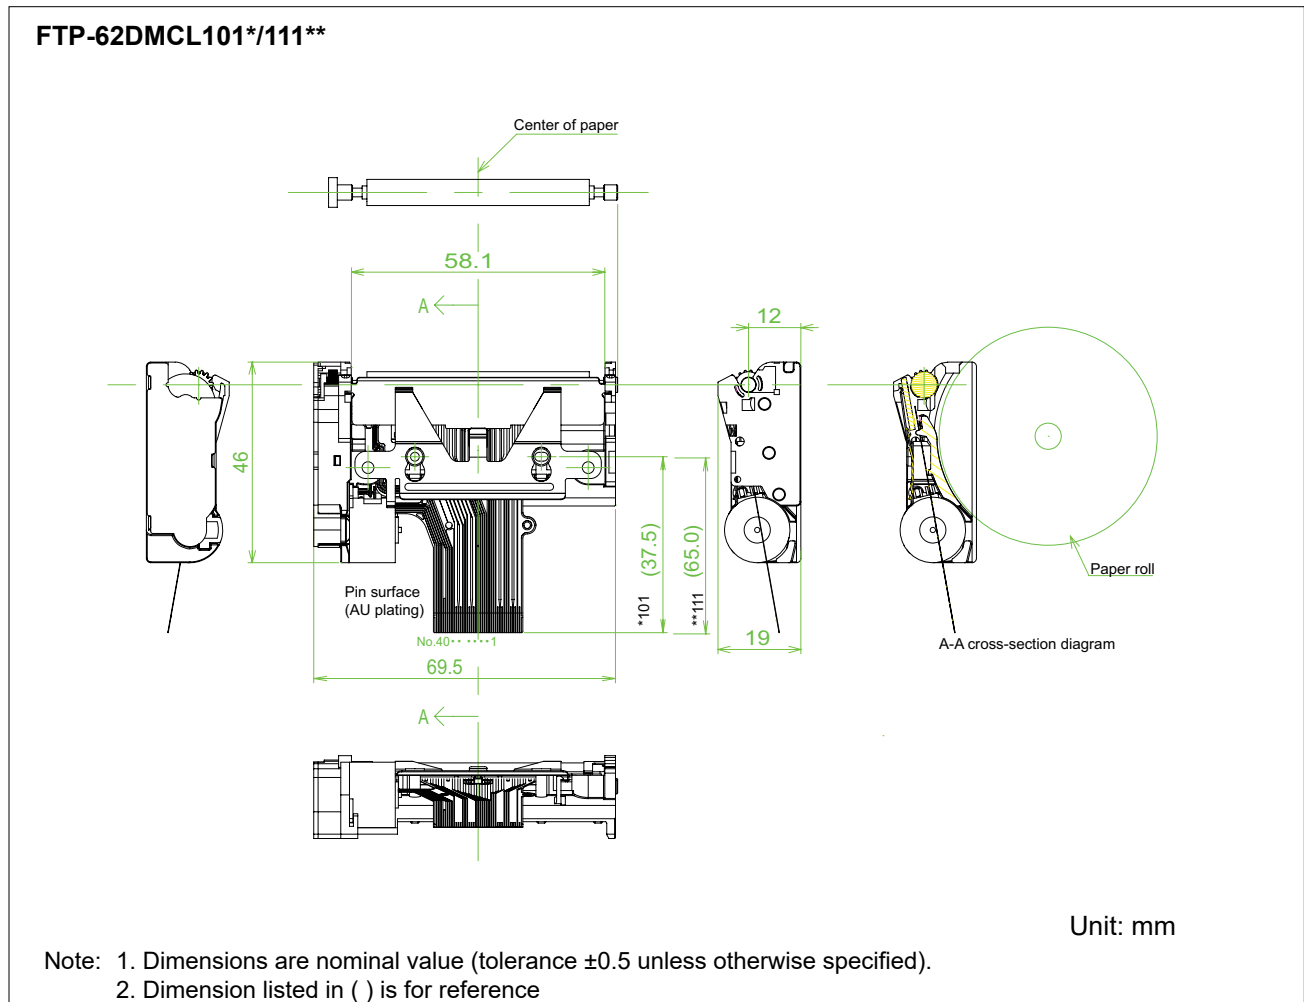

FTP-62DMCL101#02/111#02

■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS

Thermal head, control circuit side connector: 54104-4031 Molex or equivalent product

No.	Symbol	I/O	Signal Name
1	N.C.	-	No connection
2	N.C	-	
3	COM	I	Head drive power
4	COM	I	
5	COM	I	
6	COM	I	
7	SI	I	Data in
8	CLK	I	Clock
9	GND	-	Head ground
10	GND	-	
11	GND	-	
12	GND	-	
13	STB6	I	Strobe 6
14	STB5	I	Strobe 5
15	STB4	I	Strobe 4
16	Vdd	I	Logic power
17	TM	O	Thermistor
18	TM	O	
19	STB3	I	Strobe 3
20	STB2	I	Strobe 2
21	STB1	I	Strobe 1
22	GND	-	Head ground
23	GND	-	
24	GND	-	
25	GND	-	
26	/LAT	I	/ Data latch
27	SI	O	Data out
28	COM	I	Head drive power
29	COM	I	
30	COM	I	
31	COM	I	
32	N.C.	-	No connection
33	PHK	-	Cathode for photo interrupter
34	VSEN	I	Paper sensor power
35	PHE	O	Emittor for photo interruptor
36	N.C.	-	No connection
37	MT A	I	Excitation signal A
38	MT /A	I	Excitation signal /A
39	MT B	I	Excitation signal B
40	MT /B	I	Excitation signal /B

Do not plug or unplug the FPC when power is on.

FTP-62DMCL101#02/111#02

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81 3 3450 1682
Email: fcl-contact@cs.fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: +31 23 5560910
Email: info@fcl-components.eu

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park –Jing An, No.329 Heng
Feng Road, Shanghai 200070, China
Tel: +86 021 3253 0998
Email: fcsh@fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place, Suite 480
San Jose, CA 95110 U.S.A.
Tel: +1 408 745 4900
Email: fcmai.components@fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA, LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65 6375 8560
Email: fcasi@fcl-components.com

Hong Kong

FCL COMPONENTS HONG KONG CO., LIMITED
Room 13, 23/F, Seapower Tower, Concordia Plaza,
No.1 Science Museum Road,
Tsim Sha Tsui East, Kowloon, Hong Kong
Tel: +852 2881 8495
Email: fcshk@fcl-components.com

Web: www.fcl-components.com/en/

Copyright

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.

Copyright ©2024 FCL Components America, Inc. All rights reserved. Revised February 1, 2024.
