

Not for New Design

FCL Components Thermal Printer FTP-62HDSL101#0x series Interface Board

FCL Components interface board for low voltage printer mechanisms

Features

- Interface board for FTP-6xHMCL thermal printer mechanisms
- RS232C and USB (full speed) interface
- Various detection functions: paper, mark, thermal head temperature, power supply voltage, etc.
- Barcode printing available
- Auto cutter drive compatible (full or partial)
- Supports registration of characteristics and images
- UL File No. E171434
- RoHS compliant



FTP-62HDSL

■ Part numbers

Part number	Interface type	Length	Max. printing speed	Mechanism part numbers
FTP-62HDSL101#0x	USB/RS232C	2-inch	120mm/sec.	FTP-62HMCL153 FTP-62HMCL163 FTP-62HMCL463
		3-inch	100mm/sec.	FTP-63HMCL153 FTP-63HMCL163 FTP-63HMCL463
		4-inch	100mm/sec.	FTP-64HMCL153

■ Font

FTP-62HDSL101#01	Alphanumeric, Kana: 159, International: 195, JIS Kanji: approx. 7000, OCR
FTP-62HDSL101#02	Alphanumeric, Kana: 159, International: 195, Traditional Chinese: Approx 13000, OCR

■ Barcode and image

Barcode	1D	UPC-A, UPC-E, JAN(EAN)13, JAN(EAN)8, CODE39, ITF, CODABAR, CODE128, GS1 DataBar-14, GS1 DataBar-14 truncated
	2D	QR code, GS1DataBar-14 stacked, GS1 DataBar-14 Omnidirectional, GS1 DataBar Expanded
Bit image	Horizontal: 8 to 384 dots, vertical 1 to 1023 dots	

■ Specifications

Item	Specifications
Dimension	75 x 70mm
Weight	Approx. 25g
Communication interface	RS-232C USB full speed (max. 12Mbps)

■ Print/paper feed specifications

Item	Specifications		
Mechanism	FTP-62HMCL	FTP-63HMCL	FTP-64HMCL
Dot pitch	0.125mm (H) x 0.125mm (W)		
Number of dots	384 dots	576 dots	832 dots
Max. print width	48mm	72mm	104mm
Line space	Approx. 1/8 inch (26 dots/line) Changeable by command		
Print speed*1	Max. 120mm/s	Max. 100mm/s	Max. 100mm/s
Paper feed (/ATF)	Approx. 100mm/s		

■ Interface specifications at host side


Item	Specifications
USB Ver. 2.0	Data speed: Full speed (max. 12Mbps.) Differential input/output
RS-232C	Dataspeed: 9,600 / 19,200 / 38,400 / 115,200 / 230, 400 bps*2 Synchronous method: Asynchronous communication, full duplex Flow control: RTS (DTR)• CTS (DSR) signal or X ON / X OFF* 2 Input/output level: RS-232C level

Notes:

1*: Conditions when using PD150R or equivalent paper, head voltage 7.2Vm print voltage 12.5% max., operating temperature 25°C/ humidity 60±15%. White lines may appear depending on the printing pattern or division control when printing. Please evaluate in advance.

2*: Settings changed by command

■ Dimensions

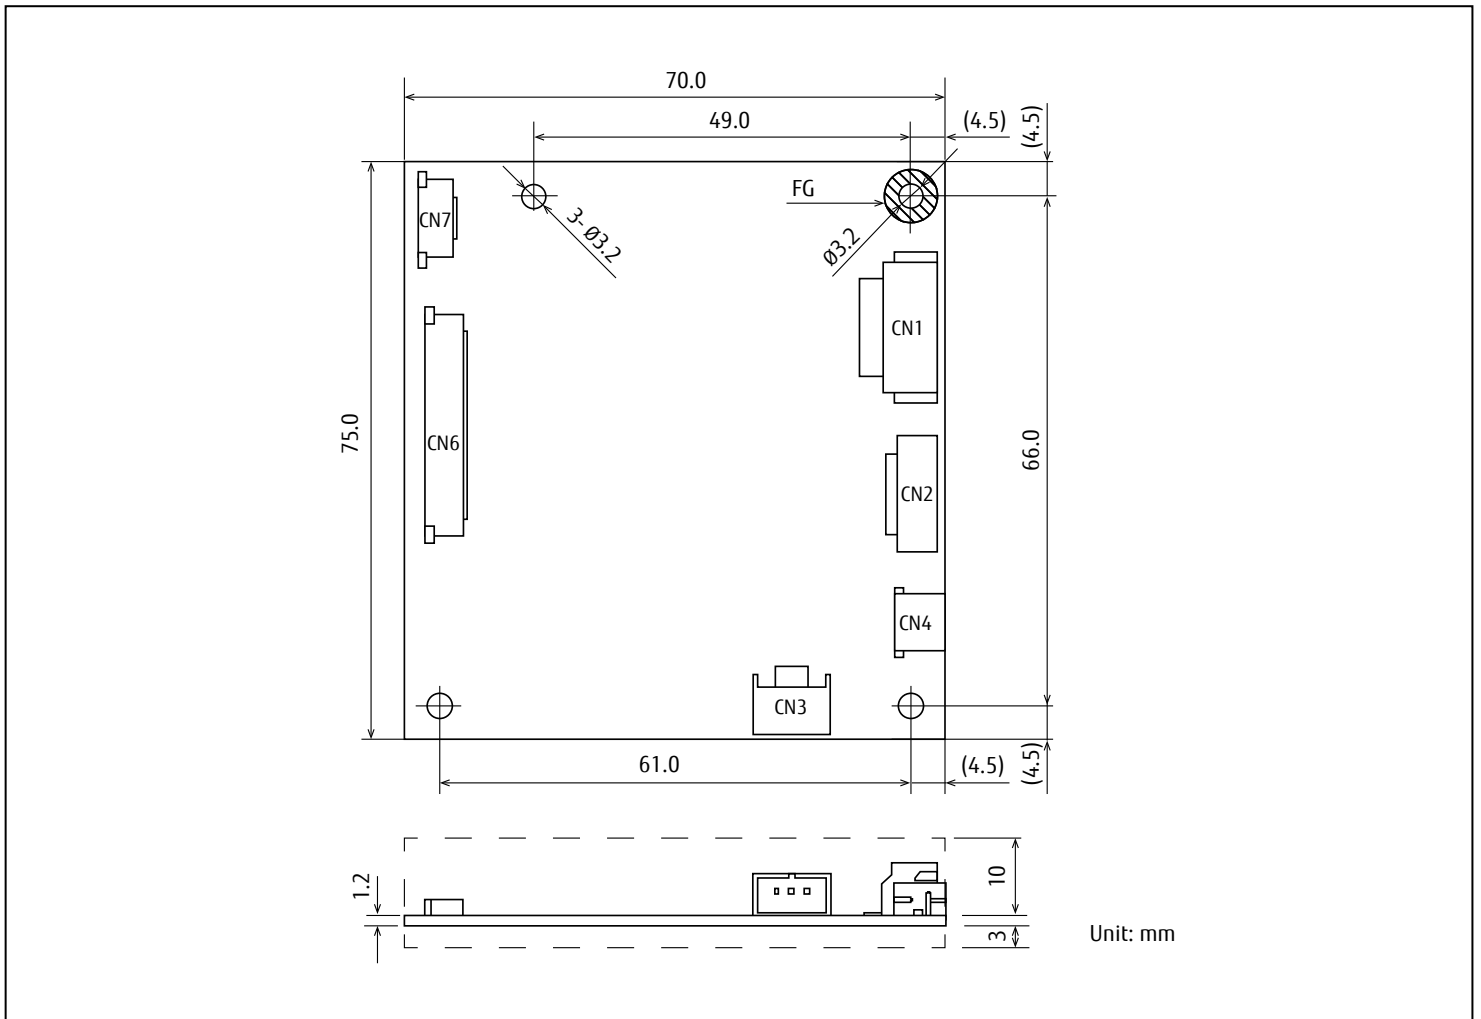

■ Connectors

Symbol	Name
CN1	Power supply connector
CN2	RS-232C connector
CN3	Near end connector
CN4	USB connector
CN5	Printer mechanism connector
CN6	Cutter connector

■ Connector for power supply

- Connector (CN1)

Recommended housing: XHP-6 (J.S.T.) or equivalent

Recommended cable: AWG#22 to 30, cable length at 300mm maximum

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	V _p	I	Power input	2	V _p	I	Power input
3	V _p	I	Power input	4	GND	-	Ground
5	GND	-	Ground	6	GND	-	Ground

■ RS-232C connector

- Connector (CN2)

Recommended housing: ZHR-8 (J.S.T.) or equivalent

Recommended cable: AWG#28 to 32, cable length at 300mm maximum

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	RXD	I	Receive data signal	2	TXD	O	Transmit data signal
3	RTS (DTR)	O	Request to send signal	4	GND	-	Ground
5	CTS (DSR)	I	Clear to send signal	6	/SLCTIN	I	Detection function setting signal
7	/INDRM	I	Initialization request signal	8	/ATF	I	Paper feed signal

■ Near end connector

- Connector (CN3)

Recommended housing: PHR-3 (J.S.T.) or equivalent

Recommended cable: AWG#28 to 32, cable length at 300mm maximum

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	NVCC	O	Near end sensor power	2	NES	I	Near end signal input
3	GND	-	Ground				

■ USB connector

- Connector (CN4)

Recommended housing: USB mini-B type

Recommended cable: Cable conforming to USB standards (V2.0 full speed)

No.	Signal	I/O	Content	No.	Signal	I/O	Content
1	VBUS	I	VBUS signal	2	D-	I/O	D- signal
3	D+	I/O	D+ signal	4	NC	-	Not connected
5	GND	-	Ground	Shell	FG	-	Frame ground

■ Printer mechanism connector

- Connector (CN6)

Please refer to the printer mechanism specifications.

■ Cutter connector

- Connector (CN7)

Please refer to the printer mechanism specifications.

Note: Symbol “-” means a negative logic signal.
 “I” or “O” means a signal direction from the interface board side

■ Commands

Command	Content
HT	Moves print position
LF	Line feed
FF	Feeds forms (new page)
DC2	Power down
ESC FF	Data print in page mode*4
ESC EM+n	Auto loading amount setting
ESC RS	Sets reverse printing
ESC US	Resets reverse printing
ESC SP+n	Character spacing setting
ESC !+n	Sets print mode
ESC \$+nL+nH	Horizontal absolute position setting*4
ESC %+n	Downloaded character specification/cancellation
ESC &+y+c1+c2+x+d1~dn	Downloaded character definition*1, 3
ESC *+m+nL+nH+d1~dk	Prints bit image
ESC -n	Undeline setting
ESC 2	Sets default line spacing
ESC 3+n	Sets the line feed length
ESC ?+n	Downloaded character deletion*1, 3
ESC @	Printer initialization
ESC A+n	Set the space between the line
ESC C+n	Sets the page length by character line
ESC D+n1~nk+NUL	Sets the horizontal tab position
ESC J+n	Feeds paper in forward direction and prints
ESC K+n	Print and backward paper feed
ESC L	Page mode selection*4
ESC R+n	Selects international character
ESC S	Line mode selection*4
ESC T+n	Print direction setting in page mode*4
ESC V+n	Right rotation 90° specification/cancellation
ESC W+xL+xH+yL+yH+dxL+dxh+dyL+dyH	Print area setting in page mode
ESC X+n+m	Setting the turning time of the motor excitation
ESC Y+SOH+ESC+x+a+FF+m+n+d1~dk	Program download*1
ESC ¥+nL+nH	Horizontal relative position setting*4
ESC a+n	Position alignment
ESC c+1+n	Sets internal processing
ESC c+5+n	External input signal valid/invalid setting
ESC d+n	Printing and n-line feeding
ESC e+n	Print and back forward paper feed paper n lines
ESC s+n	Sets printing speed
ESC t+n	Character code table selection
Command	Content

■ Commands

ESC {+n	Sets/resets upside down printing
ESC DEL +n	Nonvolatile memory deletion* ^{1, 3}
FS !+n	Kanji printing mode collective specification* ²
FS &	Kanji printing mode specification* ²
FS *+m+nL+nH+d1~dk	High-speed batch image print* ⁴
FS -n	Kanji underline specification/cancellation* ²
FS .	Kanji printing mode cancellation* ²
FS 2+c1+c2+d1~dn	User defined character definition* ^{1, 2, 3}
FS 9+n	Sets the detection functions
FS C+n	Kanji code system selection* ²
FS E+n	Standard energy setting
FS S+n1+n2	Kanji spacing setting* ²
FS W+n	Specify/cancel double tall, double wide Kanji characters* ²
FS r+n	Parameter transmission (serial mode)
FS s+nL+nH	Print speed setting
GS !+n	Character size setting
GS \$+nL+nH	Vertical absolute position setting in page mode* ⁴
GS &+m+x+yL+yH+d1~dn	Downloaded image definition* ^{1, 3}
GS '+m+n	Downloaded image print* ³
GS (E+pL+pH+fn+d1~d9(fn=67)	RS-232C communication setting* ^{1, 3}
GS (K+pL+pH+fn	Print control setting
GS (K+pL+pH+fn+n (fn=49)	Print density setting
GS (K+pL+pH+fn+n (fn=50)	Print speed setting
GS (K+pL+pH+fn+n (fn=97)	Number of head division setting
GS <	Mark detection execution
GS A+m+n	Sets the line feed length after mark detection
GS E+n	Sets print quality
GS H+n	HRI character printing position selection* ⁴
GS L+nL+nH	Sets left margin
GS V+m+n	Cut paper
GS W+nL+nH	Sets print area width
GS ¥+nL+nH	Vertical relative position setting in page mode* ⁴
GS a+n	Sets automatic status transmission
GS e+m+n	Sets bar code width
GS f+n	HRI character font selection* ⁴
GS h+n	Sets bar code height
GS k+m+n+d1~dn	Bar code print
GS k+m+k1+k2+k3+k4+{p1+d(1,1)~d(1, j)}~{pi+d(i, 1)~d(i, j)}NUL	QR code print* ⁴
GS k+m+k1+k2+k3+nL+nH+d1~dn	Maxi code print* ⁴

■ **Commands**

Command	Content
GS k+m+k1+k2+k3+k4+nL+nH+d1~dn	PDF417 print*4
GS k+m+k+n+d1~dn	Customer bar code print*4
GS k+m+n+k+pL+pH+d1~dp	Bar code (GS1 DataBar) print*4
GS k+m+n+k1+k2+k3+k4	Bar code (GS1 DataBar) setting*4
GS w+n	Barcode horizontal size setting

- *1: Makes write/erase to the nonvolatile memory.
- *2: Only the model equipped with the Kanji character corresponds.
- *3: Only the model equipped with the extended nonvolatile memory.
- *4: Only the model equipped with the extended volatile memory.

■ **Options**

Item		Part number	Length
Interface cable	USB (CN4)	FTP-629Y301#01	1,000mm (39.4 inches)
	RS-232C (CN2)	FTP-629Y302	500mm (19.7 inches)
Power supply cable	Logic, head, motor (CN1)	FTP-629Y601	300mm (11.8 inches)

Contact

Japan
 FCL COMPONENTS LIMITED
 Shinagawa Seaside Park Tower
 12-4, Higashi-shinagawa 4-chome,
 Tokyo 140 0002, Japan
 Tel: +81 3 3450 1682
 Email: fcl-contact@cs.fcl-components.com

Europe
 FCL COMPONENTS EUROPE B.V.
 Diamantlaan 25
 2132 WV Hoofddorp
 Netherlands
 Tel: +31 23 5560910
 Email: info@fcl-components.eu

China
 FCL COMPONENTS (SHANGHAI) CO., LTD.
 Unit 1105, Central Park –Jing An, No.329 Heng
 Feng Road, Shanghai 200070, China
 Tel: +86 021 3253 0998
 Email: fcsh@fcl-components.com

North and South America
 FCL COMPONENTS AMERICA, INC.
 2055 Gateway Place, Suite 480
 San Jose, CA 95110 U.S.A.
 Tel: +1 408 745 4900
 Email: fcai.components@fcl-components.com

Asia Pacific
 FCL COMPONENTS ASIA, LTD.
 No. 20 Harbour Drive, #07-01B
 Singapore 117612
 Tel: +65 6375 8560
 Email: fcal@fcl-components.com

Hong Kong
 FCL COMPONENTS HONG KONG CO., LIMITED
 Room 13, 23/F, Seapower Tower, Concordia Plaza,
 No.1 Science Museum Road,
 Tsim Sha Tsui East, Kowloon, Hong Kong
 Tel: +852 2881 8495
 Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

Copyright

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
 Copyright ©2024 FCL Components America, Inc. All rights reserved. Revised February 1, 2024.