

FCL Components Thermal Printer

BATTERY DRIVE, 4" HIGH SPEED THERMAL PRINTER


FTP-648MCL103-R

Easy Loading Method

■ OVERVIEW

The easy loading FTP-608 MCL Series is ultra compact high speed, battery driven thermal printer, printing 4-inch wide paper (114mm) where platens are removable. Our unique platen removal mechanism improved paper loading and maintenance.

The FTP-608 MCL series can be used for a variety of applications, such as portable terminals, POS, ticket issuing terminals, label printers, banking terminals, and measurement and medical equipment.

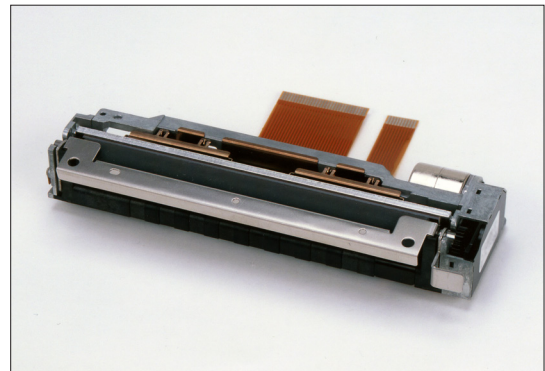

■ HIGHLIGHTS

- Easy loading type
- Our unique platen removal mechanism improved paper loading and maintenance.
- Ultra compact
- Height 20.5 mm, width 139.5mm, depth 40.5 mm for the 4 inch model.
- High speed printing
It can print at 50 mm/s (400 dotlines/s) maximum by using FCL Components's unique head drive control.
- High resolution printing
- Label paper capability.
- RoHS compliant

FTP-648MCL103-R

■ PART NUMBERS

Item	Part Number	
Printer mechanism	FTP-648MCL103-R (front insertion type) with platen open detect switch	
LSI for driving	FTP-628CU311-R	
Cables	USB	FTP-629Y301#01-R
	Serial	FTP-628Y302-R
	Power	FTP-628Y403-R

■ SPECIFICATIONS

Item	Specifications
Part number	FTP-648MCL103-R
Printing method	Thermal line dot method
Dot structure	832 dots/line
Dot pitch (horizontal)	0.125mm (8dots/mm) - Dot density
Dot pitch (vertical)	0.125mm (8dots/mm) - Line feed pitch
Effective printing area	104mm
Number of columns	ANK 69 columns/line (maximum 12 x 24 dot font)
Paper width	114mm
Paper thickness	60 to 80 μ m (some paper may not be used because of characteristics)
Printing speed	Maximum 50mm/sec. (400 dot lines/sec.) 8.5V
Character types	Alphanumeric, katakana: 159 types International and special characters: 195 types OCRI 103 types OCRIII 23 types OCRIV 103 types Extended numeric 11 types JIS Kanji level 1, level 2, non-Kanji about 6,800 types
Character, dimensions (WxH), number of columns	12 x 24 dots, 69 columns: ANK 24 x 24 dots, 34 columns: ANK, Kanji 8 x 16 dots, 104 columns: ANK 16 x 16 dots, 52 columns: ANK, Kanji 24 x 40 dots, 34 columns: OCRI 24 x 48 dots, 34 columns: OCRIII 36 x 60 dots, 23 columns: OCRIV 24 x 48 dots, 34 columns: Extended numeric

■ SPECIFICATIONS

Item		Specifications	
		FTP-648MCL103-R	
Interface		Conforms to RS232C / USB	
Operating Voltage	for print head	4.2 VDC to 8.5 V, Approx. 2.3A (At 7.2VDC, 176 ohm, concurrent applied dot 64dots)	
	for motor	4.2VDC to 8.5V, Approx. 1A	
	for logic	2.7 to 3.3VDC or 4.75 to 5.25VDC, 0.2A maximum	
Dimensions	Mechanism	139.5 x 40.5 x 20.5mm (W x D x H)	
	Interface board	69 x 52 x 20mm (W x D x H)	
Weight	Mechanism	Approximately 148 g	
	Interface board	Approximately 22g	
Head life		Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 12.5% or less)	
Operating environment	Operating temperature*	0°C to +70°C	
	Operating humidity	20 to 85% RH (no condensation)	
	Storage	-40°C to +80°C (paper not included)	
	Storage humidity	5 to 90% RH (no condensation)	
Detection function	Head temperature detection	Detected by thermistor	
	Paper out/ mark detection	Detected by photo interruptor	
Recommended thermal sensitive paper		High sensitive paper	TF50KS-E4 (Nippon paper)
		Standard paper	TK60KS-E (Nippon paper) PD150R (Oji paper) FTP-040P0020 (114mm)
		Medium life paper	TK60KS-F1 (Nippon paper) PD170R (Oji paper) P220VBB-1 (Mitsubishi paper)
		Long life paper	PD160R-N (Oji paper) AFP-235 (Mitsubishi paper) HA220AA (Nippon paper)
		Label paper	HW54T (Nippon paper)


*+5°C to +40°C printing density assurance range (0 to 50°C capability)

■ FUNCTION


	Item		Item
1.	Test print function	8.	Motor power saving function
2.	Paper out detection	9.	Mark detection function
3.	Paper near end detection	10.	MCU operation abnormality detection
4.	Platen open detect	11.	Power ON/OFF sequence protection
5.	Thermal head temperature abnormality detection	12.	Motor over-current protection
6.	Blow-out fuse detection	13.	Hardware timer
7.	Head voltage abnormality detection		

DIMENSIONS

1. Printer mechanism: 4 inch

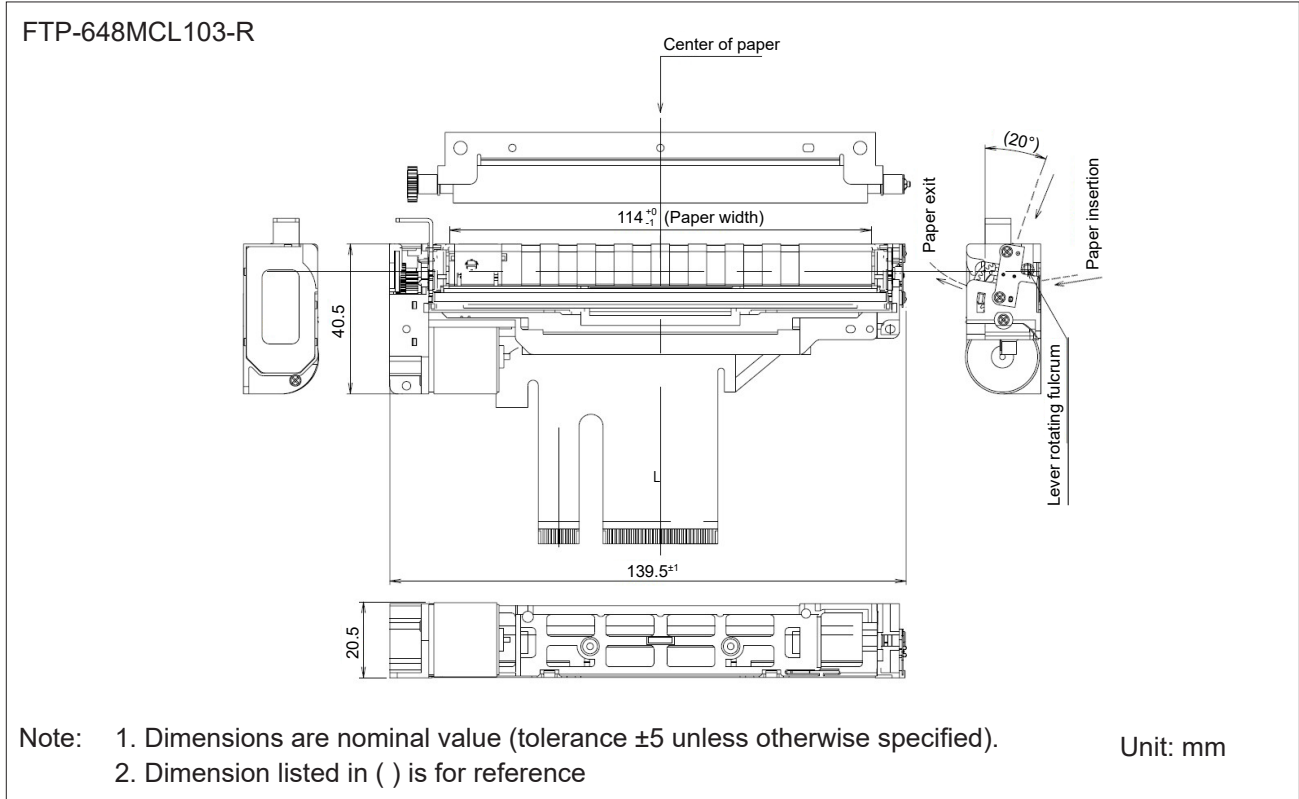

2. Interface board

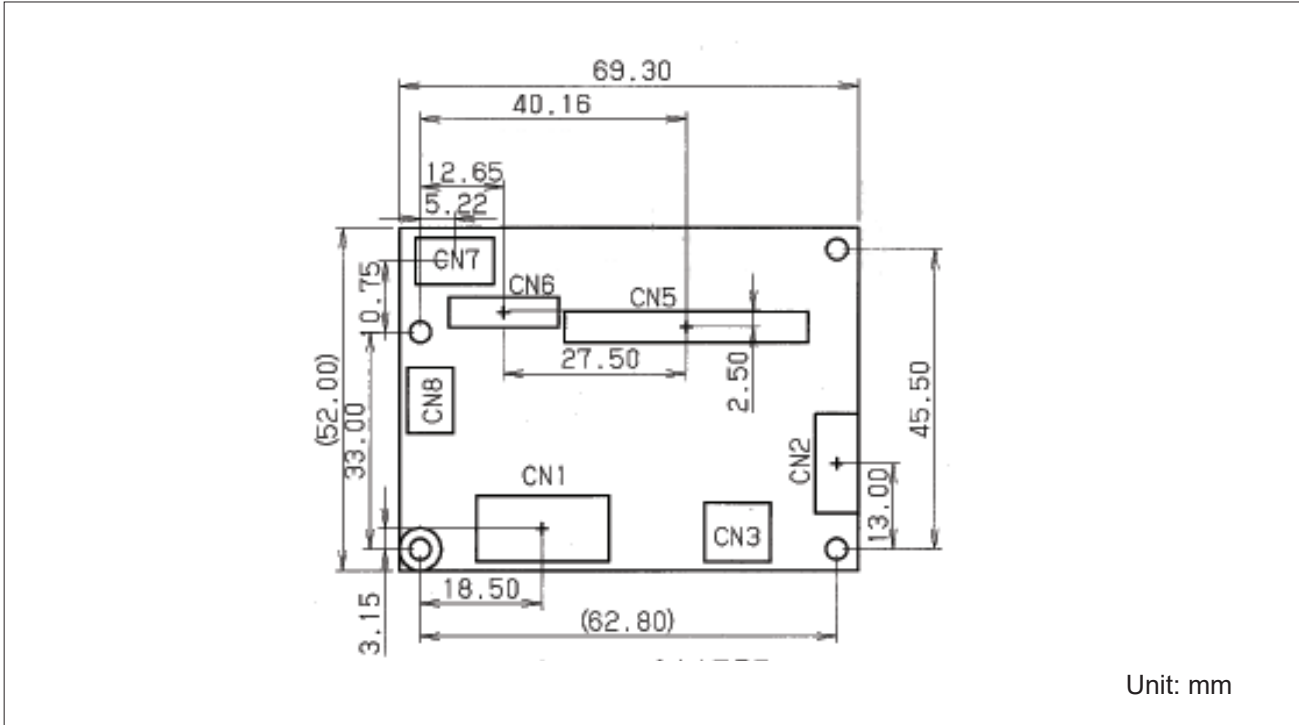

FTP-648 MCL103-R

1. Thermal head, control circuit side connector:

CN1: 52610-3071 (Molex)

CN2: 52610-1071 (Molex)

2. Pin assignment (flexible) of the printer mechanical side:


CN1: the platen release switch side is defined as No. 1

CN2: the motor excitation signal side is defined as No. 1 (31)

No	Signal	Contents
1	SW	Platen open switch
2	SW	Platen open switch
3	VH	Head drive power
4	VH	Head drive power
5	VH	Head drive power
6	DI	Data in
7	STB 7	Strobe 7
8	STB 6	Strobe 6
9	STB 5	Strobe 5
10	STB 4	Strobe 4
11	$\overline{AE02}$	
12	$\overline{AE01}$	
13	L-GND	Logic ground
14	GND	Head ground
15	GND	Head ground
16	GND	Head ground
17	GND	Head ground
18	GND	Head ground
19	TM	Head thermistor
20	TM	Head thermistor
21	STB 3	Strobe 3
22	STB 2	Strobe 2
23	STB 1	Strobe 1
24	Vdd	Logic power
25	CLK	Clock
26	\overline{LAT}	Data latch
27	DO	Data out
28	VH	Head drive power
29	VH	Head drive power
30	VH	Head drive power

No	Signal	Contents
31	PHK	Cathode
32	VSEN	Paper sensor power
33	PHE	Emitter
34	MT A	Excitation signal A
35	MT \overline{A}	Excitation signal \overline{A}
36	MT B	Excitation signal B
37	MT \overline{B}	Excitation signal \overline{B}
38	TM	Motor thermistor
39	TM	Motor thermistor
40	NC	Not connected

FTP-648MCL103-R

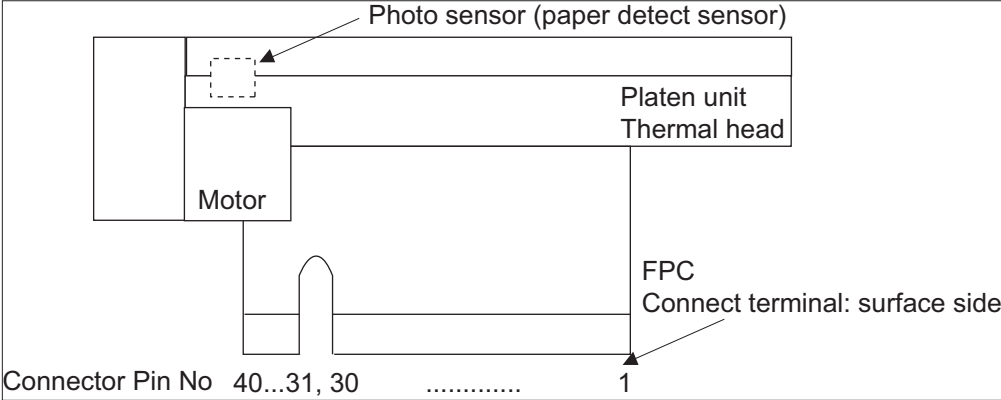

Contact

Japan
FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81 3 3450 1682
Email: fcl-contact@cs.fcl-components.com

Europe
FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: +31 23 5560910
Email: info@fcl-components.eu

China
FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park –Jing An, No.329 Heng Feng
Road, Shanghai 200070, China
Tel: +86 021 3253 0998
Email: fcsh@fcl-components.com

North and South America
FCL COMPONENTS AMERICA, INC.
2055 Gateway Place, Suite 480
San Jose, CA 95110 U.S.A.
Tel: +1 408 745 4900
Email: contact@fcl-components.us

Asia Pacific
FCL COMPONENTS ASIA, LTD.
51 Changi Business Park Central, #06-07
Singapore 486066
Tel: +65 6375 8560
Email: fcal@fcl-components.com

Hong Kong
FCL COMPONENTS HONG KONG Co., LIMITED
Room 13, 23/F, Seapower Tower, Concordia Plaza,
No.1 Science Museum Road,
Tsim Sha Tsui East, Kowloon, Hong Kong
Tel: +852 2881 8495
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

Copyright

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Copyright ©2026 FCL Components America, Inc. All rights reserved. Revised March 4, 2026.