

# FCL Components Thermal Printer FTP-64GMCL153 series


FCL Components 4" high speed (200mm/s) thermal printer mechanism

---

## Overview

The FTP-64GMCL series thermal printer driven by 24VDC provides high speed printing (200mm/s) for 4-inch wide paper.

The series is suitable for a variety of applications, such as POS/ECR, kiosk terminals, ticket machines, label printers, banking machines, measuring devices, medical equipment, etc.

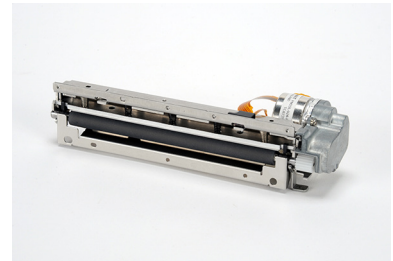

FTP-64GMCL153

## Features

- High-speed printing  
It can print at 200mm/s (1600 dotlines/s) maximum by using FCL Components' unique head drive control
- Rear paper insertion mechanism with locking platen  
FCL Components' unique platen release mechanism allows for a straight paper path and easy head maintenance
- Multi-feature metal frame: The rugged metal frame provides excellent ESD performance, is shock/vibration resistant and the heat-sink allows for continuous printing
- Compact size  
Width: 144.6mm, depth: 29.1mm, height: 42.5mm
- High resolution  
8 dots/mm head provides clear print out
- RoHS compliant
- UL recognized. File number E171434

■ Part numbers

Item		Part Number
Printer mechanism	Back insertion	FTP-64GMCL153
LSI for driving		FTP-64GCU231
Interface board	Serial (RS232C/USB)	FTP-64GDSL231
Interface cable	Serial	FTP-62GY302
	USB	FTP-62GY311#01
Power supply cable	Logic, head, motor	FTP-629Y603

## ■ Specifications


Item		Specifications
Part number		FTP-64GMCL153
Printing method		Thermal sensitive line dot method
Dot structure		832 dots/lines
Dot pitch (horizontal)		0.125mm (8 dots/mm) - Dot density
Dot pitch (vertical)		0.125mm (8 dots/mm) - Line feed pitch
Effective printing area		104mm
Number of columns		ANK 48 columns/line (12 x 24 x dot font), OCD 24 columns (24 x 40)
Paper width		114mm +0/-1
Paper thickness		60-150 $\mu$ m*1
Cutting type		---
Printing speed		200mm/s (1600 dot lines/s)
Power	For head	24VDC $\pm$ 10% 6A (24V, 1500 $\Omega$ , +25°C, concurrent applied dot number: 256 dots)
	For printer motor	24VDC $\pm$ 10%, 1.5A maximum
	For logic	3.3 or 5 VDC $\pm$ 10%. 0.125A maximum
Dimensions (WxDxH)	Printer mechanism	144.6 x 29.1 x 42.5mm
Weight	Printer mechanism	Approx. 170g
Expected life	Head	Pulse durability: 100 million pulse/dot (using FCL Components' standard driving method)
		Wear resistance: 100km (at 12.5% print ratio)
Environmental conditions	Operating temperature	-20°C to +60°C (no condensation), +5°C to +40°C print density guarantee
	Operating humidity	20 to 85% RH (no condensation)
	Storage temperature	-40°C to +70°C (excluding paper)
	Storage humidity	5 to 95% RH (no condensation)
Detection functions	Head temperature	By thermistor
	Paper out/Mark detect	By photointerrupter
	Platen open	By slide switch
Recommended thermal sensitive paper		PD150R (Oji paper)

\*1: There may be exceptions

## ■ Interface boards

Item		Specifications
Part number		FTP-64GDSDL231
Power		24V
Character type	Alphanumeric, Kana, International & special OCR, enlarged characters, downloaded characters, external characters	
	ANK, Thai, JIS Kanji, Traditional Chinese	
Characteristic dimensions (W x H)		8 x 16 dots, 12 x 24 dots, 16 x 16 dots, 24 x 24 dots, 24 x 40 dots, 24 x 48 dots, 36 x 60 dots
Interface		USB, RS-232C
Dimensions (W x D)		70 x 35 mm

- Dimensions
  - Printer mechanism 4-inch

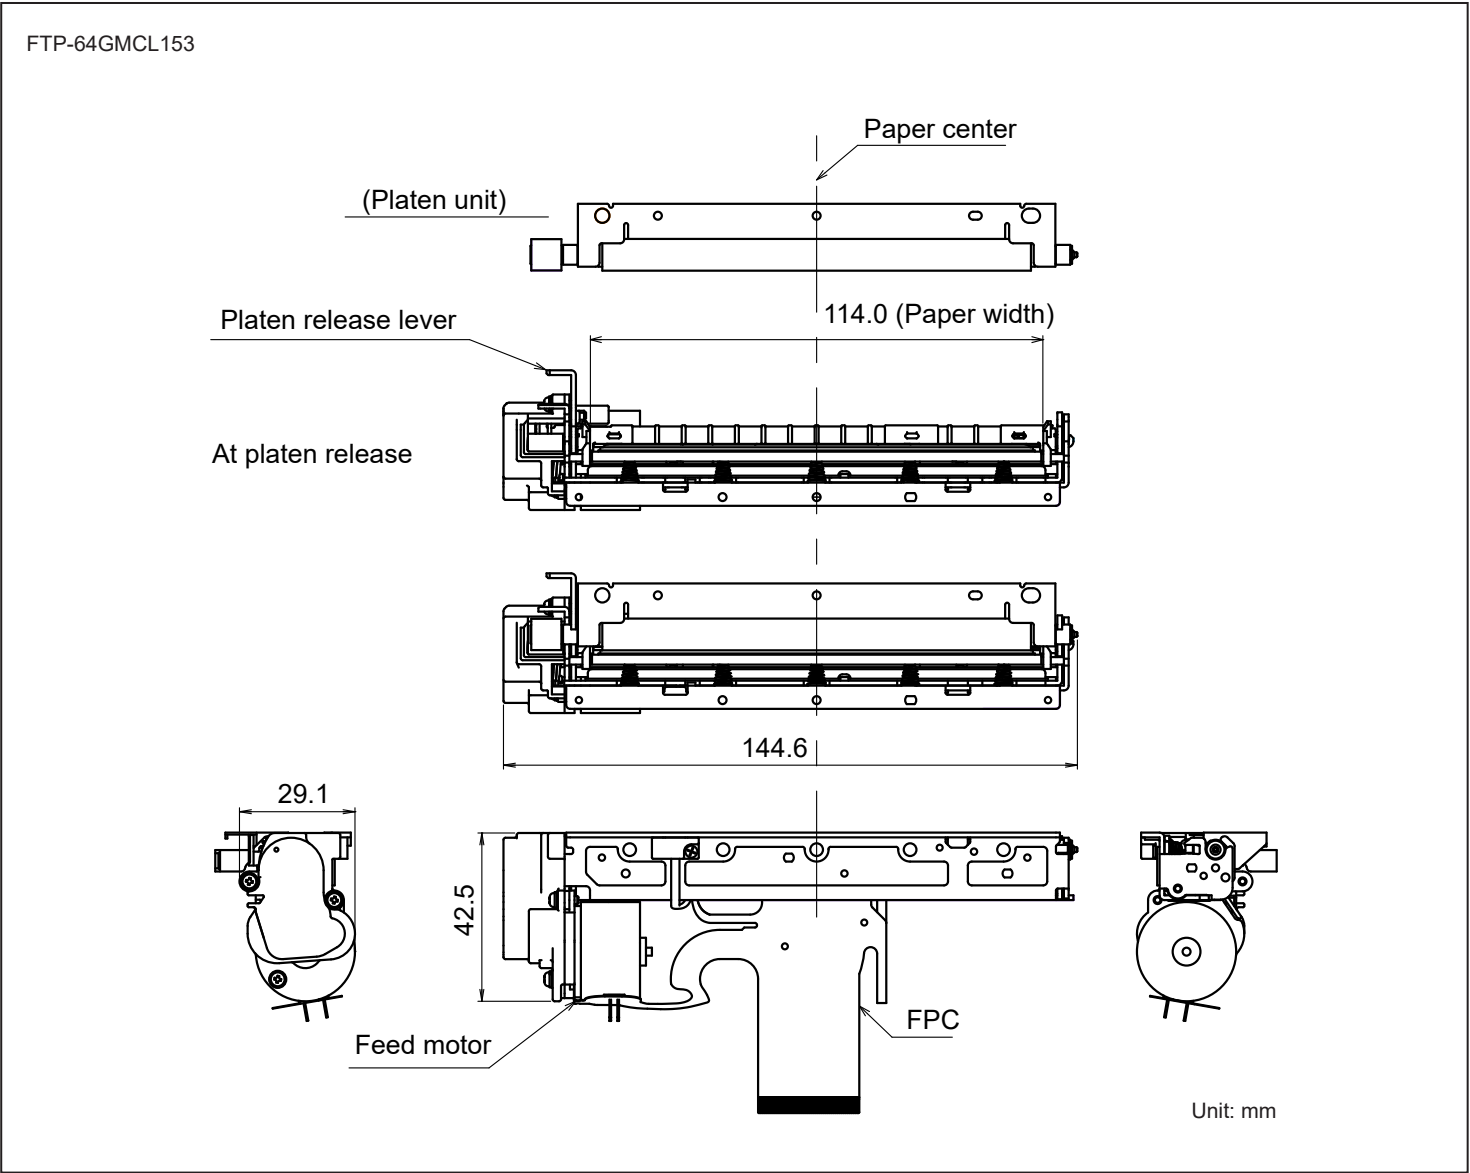

## ■ Connector pin assignments of printer mechanism (FPC)

No	Signal	Content	I/O
1	VSEN	Paper sensor power	IN
2	PHK	Cathode for photo interrupter	OUT
3	PHE	Emitter for photo interrupter	OUT
4	N.C.	Not connected	-
5	VH	Head drive power	IN
6	VH	Head drive power	IN
7	VH	Head drive power	IN
8	VH	Head drive power	IN
9	VH	Head drive power	IN
10	VH	Head drive power	IN
11	DI	Data in	IN
12	/STB3	/Strobe3	IN
13	/STB4	/Strobe4	IN
14	VDD	Logic power	IN
15	GND	Head ground	-
16	GND	Head ground	-
17	GND	Head ground	-
18	GND	Head ground	-
19	GND	Head ground	-
20	GND	Head ground	-
21	GND	Head ground	-
22	GND	Head ground	-
23	GND	Head ground	-
24	GND	Head ground	-
25	GND	Head ground	-
26	GND	Head ground	-
27	TM	Thermistor	OUT
28	/STB1	/Strobe1	IN
29	/STB2	/Strobe2	IN
30	/LAT	/Data latch	IN
31	CLK	Clock	IN
32	VH	Head drive power	IN
33	VH	Head drive power	IN
34	VH	Head drive power	IN
35	VH	Head drive power	IN
36	VH	Head drive power	IN
37	VH	Head drive power	IN
38	N.C.	Not connected	-
39	SW	Platen switch release	OUT
40	SW	Platen switch release	OUT
41	MTM	Motor thermistor	OUT

■ Connector pin assignments of printer mechanism (FPC)

No	Signal	Content	I/O
42	MTM	Motor thermistor	OUT
43	MT_/A	Excitation signal /A	SINK/SOURCE
44	MT_/A	Excitation signal /A	SINK/SOURCE
45	MT_A	Excitation signal A	SINK/SOURCE
46	MT_A	Excitation signal A	SINK/SOURCE
47	MT_/B	Excitation signal /B	SINK/SOURCE
48	MT_/B	Excitation signal /B	SINK/SOURCE
49	MT_B	Excitation signal B	SINK/SOURCE
50	MT_B	Excitation signal B	SINK/SOURCE

Contact

Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81 3 3450 1682  
Email: fcl-contact@cs.fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: +31 23 5560910  
Email: info@fcl-components.eu

China

FCL COMPONENTS (SHANGHAI) CO., LTD.  
Unit 1105, Central Park –Jing An, No.329 Heng  
Feng Road, Shanghai 200070, China  
Tel: +86 021 3253 0998  
Email: fcsh@fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place, Suite 480  
San Jose, CA 95110 U.S.A.  
Tel: +1 408 745 4900  
Email: fcai.components@fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA, LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65 6375 8560  
Email: fcal@fcl-components.com

Hong Kong

FCL COMPONENTS HONG KONG CO., LIMITED  
Room 13, 23/F, Seapower Tower, Concordia Plaza,  
No.1 Science Museum Road,  
Tsim Sha Tsui East, Kowloon, Hong Kong  
Tel: +852 2881 8495  
Email: fcsh@fcl-components.com

Web: [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

Copyright

All trademarks or registered trademarks are the property of their respective owners. FCL Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products FCL Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Copyright ©2024 FCL Components America, Inc. All rights reserved. Revised September 27, 2024.