

POWER RELAY 1 POLE - 10A HIGH SENSITIVITY

FTR-K1 Series

RoHS Compliant







■ FEATURES

· Low profile (height: 15.7mm)

· High insulation

Insulation distance (between coil and contacts): 10mm min.

Dielectric strength: 5,000V Surge strength: 10,000V

- Low coil power (400mW)
- Cadmium free contacts
- · Safety standards

UL, CSA, VDE approved

UL, CSA TV-5 rating approved (1 Form A type)


- UL F class wire insulation
- · Flux proof, RTII
- · RoHS compliant

■ APPLICATIONS

Home appliances, heater control, oven range etc.

■ PART NUMBERS

[Example] <u>FTR-K1</u> <u>A</u> <u>L</u> <u>012</u> <u>W</u> - <u>LA</u> - <u>BG</u>
(a) (b) (c) (d) (e) (f) (g)

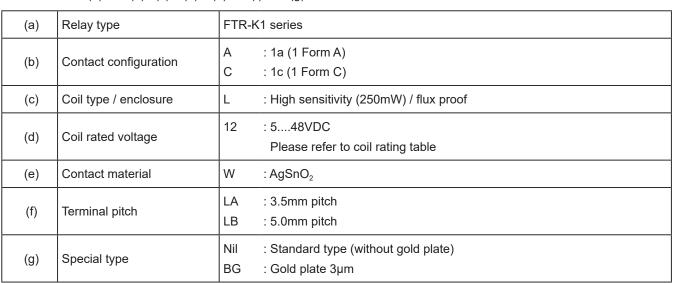

Actual marking does not carry the type name: "FTR"

E.g.: Ordering code: FTR-K1AL012W-LA Actual marking: K1AL012W-LA

1

FTR-K1 Series

■ SPECIFICATIONS

	Item		Specifications	Remarks/Conditions	
Contact	Configuration		1a (1 Form A) / 1c (1 Form C)		
Data	Construction		Single		
	Material		$AgSnO_2$		
	Resistance		Max. 100 m $Ω$	Initial, at 1A, 6VDC	
	Contact rating		10A, 250VAC	Resistive	
	Max. carrying current *1		14A		
	Max. switching voltage		440VAC		
	Max. switching power		2,500VA		
	Min. switching load *2		100mA, 5VDC		
Coil	Rated power (20°C)		250mW		
	Operate power (20°C)		141mW		
			LA: -40°C to +85°C	NI- f4	
	Operating temp	erature range	LB: -40°C to +105°C	No frost	
Time	Operate		Max. 15ms	Without bounce, no diode	
	Release		Max. 5ms	Without bounce, no diode	
Life	Mechanical		Min. 20 x 10 ⁶ operations		
Insulation	Et	100	Min. 100 x 10 ³ operations (-LA and –LB 1 Form C)		
	Electrical	AC contact rating	Min. 150 x 10 ³ operations (-LB 1 Form A)		
Insulation	Insulation resistance		Min. 1,000MΩ	At 500VDC	
	Dielectric	Open contacs	1,000VAC (50/60Hz) 1minute		
	strength	Coil to contacts	5,000VAC (50/60Hz) 1minte		
	Surge strength	Coil to contacts	10,000V / 1.2 x 50µs standard wave		
	Clearance		10mm		
	Creepage		10mm		
	EN61810-1, VDE0435	Voltage	250V		
		Pollution	3		
		Material group	Illa		
		Category	C / 250V (Reference voltage) (VDE0110b)		
Others	Vibration resistance	Misoperation≥1µs	10 to 55 to 10Hz single amplitude 0.35mm	Coil ON/OFF, 3 axis, total 6 cycles	
		Endurance	10 to 55 to 10Hz single amplitude 0.75mm	Coil OFF, 3 axis, total 6 hours	
	Shock resistance	Misoperation≥1µs	100m/s² (11±1ms)	Coil ON/OFF, 3 axis, total 36 operations	
		Endurance	1,000m/s² (6±1ms)	Coil OFF, 3 axis, total 18 operations	
	Dimensions / Weight		12.7 x 29.0 x 15.7mm / Approximately 13g		
	Sealing		Flux proof, RTII		

 $^{^{\}star}$ 1: Need to consider the heat from PCB when max. current is more than 10A.

^{* 2:} Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

■ COIL DATA

Coil Code	Nominal Voltage (VDC)	Coil Resistance ±10% (Ω)	Must Operate Voltage*1 (VDC)	Must Release Voltage ^{*1} (VDC)	Nominal Power (mW)
005	5	100	3.75	0.5	
006	6	145	4.5	0.6	
009	9	325	6.75	0.9	
012	12	575	9	1.2	250
018	18	1,300	13.5	1.8	
024	24	2,310	18	2.4	
048	48	9,216	36	4.8	

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

■ SAFETY STANDARDS


Type	Compliance	Contact Rating			
Туре	Compliance	1a (1 Form A)	1c (1 Form C)		
UL	Flammability: UL 94-V-0 (plastics)				
	UL508 File No. E63614	[FTR-K1AL()W-(LA/AB)] 10A, 277VAC (resistive)	[FTR-K1CL ()W-(LA/LB)] 10A, 277VAC (resistive)		
CSA	C22.2 No. 14 File No. LR40304	1/3hp, 125VAC 1/2hp, 277VAC Pilot duty: B300	[FTR-K1CL()W-LB] 16A, 260VAC (N.O.)		
VDE	IEC/EN61810-1 E60335-1 clause 15.3; 16.3; 29.1; 29.2; 29.3 EN60730-1 clause 12.1; 13.2; 20.1; 20.2; 20.3	[FTR-K1AL()W-(LA/LB)] 10A, 250VAC, 150,000 cycles LA: 85°C, LB:105°C 3A, 250VAC (cosφ=0.4), 100,000 cycles, LA: 85°C, LB: 105°C	10A, 250VAC, 100,000 cycles, LA: 85°C		

The part numbers on the safety standards' certifications and the ordering part numbers may differe. Coil code is in ().


^{*:} Specified operated values are valid for pulse wave voltage.

■ DIMENSIONS


3.5mm pitch

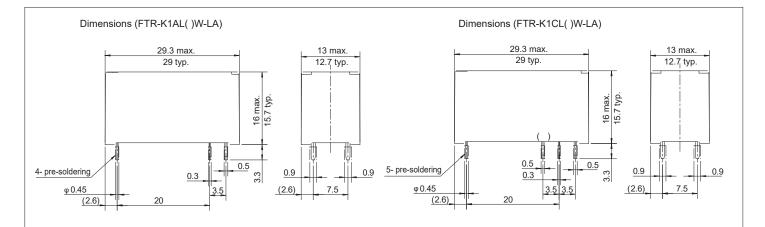


Schematics (BOTTOM VIEW) (FTR-K1AL()W-LA)




Schematics (BOTTOM VIEW) (FTR-K1CL()W-LA)



PC board mounting hole layout (BOTTOM VIEW) (FTR-K1AL ()W-LA)



PC board mounting hole layout (BOTTOM VIEW) (FTR-K1CL ()W-LA)



- * Dimensions of the terminals do not include thickness of pre-soldering.
- * Dimensions do not include tolerances. Please ask specification in case you need tolerance.


* Tolerance of PC board mounting hole layout : ±0.1 unless otherwise specified.


(Unit: mm)

■ DIMENSIONS


5.0mm pitch


Dimensions (FTR-K1AL()W-LB)






Dimensions (FTR-K1CL()W-LB)






Schematics (BOTTOM VIEW) (FTR-K1AL()W-LB)




Connect terminal #1 and #8 on the PC board

Schematics (BOTTOM VIEW) (FTR-K1CL()W-LB)




Connect terminal #1 and #8 on the PC board

PC board mounting hole layout (BOTTOM VIEW) (FTR-K1AL ()W-LB)



PC board mounting hole layout (BOTTOM VIEW) (FTR-K1CL ()W-LB)




- * Dimensions of the terminals do not include thickness of pre-soldering.
- * Dimensions do not include tolerances. Please ask specification in case you need tolerance.


* Tolerance of PC board mounting hole layout : ±0.1 unless otherwise specified.


(Unit: mm)


■ CHARACTERISTIC DATA


(Characteristic data is not guaranteed value but measured values of samples from production line.)














■ PART NUMBER LIST

Part Number	Contact Configuration	Nominal Power	Contact Material	Terminal pitch	
FTR-K1AL()W-LA			AgSnO ₂	3.5mm	
FTR-K1AL()W-LA-BG	1a	High sensitivity (250mW)	Gold plated AgSnO ₂		
FTR-K1AL()W-LB	(1 Form A)		AgSnO ₂	5.0	
FTR-K1AL()W-LB-BG			Gold plated AgSnO ₂	5.0mm	
FTR-K1CL()W-LA		AgSnO ₂		2.5	
FTR-K1CL()W-LA-BG	1c	High sensitivity	Gold plated AgSnO ₂	3.5mm	
FTR-K1CL()W-LB	CL()W-LB (1 Form C)		AgSnO ₂	5.0mm	
FTR-K1CL()W-LB-BG			Gold plated AgSnO ₂	5.011111	

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- · Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

 All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

• Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

• Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED Shinagawa Seaside Park Tower 12-4, Higashi-shinagawa 4-chome, Tokyo 140 0002, Japan

Tel: +81-3-3450-1682

Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC. 2055 Gateway Place Suite 480, San Jose, CA 95110 USA Tel: +1-408-745-4900

Email: contact@fcl-components.us

Europe

FCL COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp, Netherlands Tel: +31-23-556-0910

Email: info@fcl-components.eu

Asia Pacific

FCL COMPONENTS ASIA PTE LTD. No. 20 Harbour Drive, #07-01B Singapore 117612

Tel: +65-6375-8560

Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO.,LTD. Unit 1105, Central Park - Jing An, No.329 Heng Feng Road, Shanghai 200070, China

Tel: +86-21-3253 0998

Email: fcsh@fcl-components.com

Hong Kong

FCL COMPONENTS HONG KONG CO., LIMITED Unit 2313, Seapower Tower, Concordia Plaza, No.1 Science Museum Road, TST, Kowloon, Hong Kong

Tel: +852-2881-8495

Email: fcal@fcl-components.com

Web: www.fcl-components.com/en/

© 2025 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, expect as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January, 2025.