

POWER RELAY

1 POLE – 5A Relay Type

FTR-F2 Series

■ FEATURES

- High density mounting
Saves space by 26% compared to FTR-H1 type.
- High insulation
Insulation distance between coil and contacts: 6mm
Dielectric Strength: 4KV
Surge Strength: 10KV
- Flux proof type, RTII
- Flammability 94V-0
- Cadmium free contact for eco-program
- SAFETY STANDARDS
UL, CSA, VDE, CQC approved
UL/CSA TV-5 rating approved
- RoHS Compliant



■ PARTNUMBER INFORMATION

[Example] FTR-F2 A K 012 T
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-F2	: FTR-F2 Series
(b)	Contact configuration	A	: 1 form A (SPST-NO)
(c)	Coil type / enclosure	K L	: Standard type (530mW) : High sensitivity type (250mW)
(d)	Coil rated voltage	012	: 5....48VDC See coil rating table
(e)	Contact material	T	: Silver tin oxide / TV-5

Actual marking does not carry the type name : "FTR"
E.g.: Ordering code: FTR-F2AK012T Actual marking: F2AK012T

FTR-F2 Series

■ SPECIFICATIONS

Item			Standard FTR-F2AK () T	Sensitive FTR-F2AL () T
Contact data	Configuration		1 Form A (SPST-NO)	
	Construction		Single	
	Material		Silver tin oxide (AgSnO ₂)	
	Resistance (initial)		Max. 100 mΩ at 6 VDC, 1 A	
	Contact rating		5A, 250VAC / 30VDC	
	Max. carrying current		5A	
	Max. inrush current		78A 250VAC	
	Max. switching voltage		400VAC / 300 VDC	
	Max. switching power		1,250VA / 150W	
	Min. switching load*		100 mA, 5 VDC	
Life	Mechanical		Min. 2 x 10 ⁶ operations	
	Electrical	AC contact rating	Min. 100 x 10 ³ operations	
		DC contact rating	Min. 100 x 10 ³ operations	
		Lamp load (TV-5)	Min. 25 x 10 ³ operations	
Coil data	Rated power (at 20°C)		530mW	250mW
	Operate power (at 20°C)		260mW	160mW
	Operating temperature range		-40°C to +70°C (no frost)	
Timing data	Operate (at nominal voltage)		Max. 15 ms	
	Release (at nominal voltage)		Max. 5 ms	
Insulation	Resistance (Initial)		Min. 1,000MΩ at 500VDC	
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min	
		Contacts to coil	4,000VAC (50/60Hz) 1min	
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave	
	Clearance / creepage		6mm / 6mm	
	EN61810-1, VDE0435	Voltage	250V	
		Pollution degree	2	
		Material group	III a	
		Category	8 / 250V	
Others	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.5mm	
		Endurance	10 to 55Hz double amplitude 1.5mm	
	Shock resistance	Misoperation	Min. 200m/s ² (11 ± 1ms)	
		Endurance	Min. 1,000m/s ² (6 ± 1ms)	
	Weight		Approximately 13g	
	Sealing		Flux proof RTII	

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-F2 Series

■ COIL RATING

Standard type (530mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
005	5	47	3.5	0.25	530
006	6	68	4.2	0.3	
009	9	155	6.3	0.45	
012	12	270	8.4	0.6	
018	18	610	12.6	0.9	
024	24	1,100	16.8	1.2	
048	48	4,400	33.6	2.4	

Sensitive type (250mW)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
005	5	100	4	0.25	250
006	6	145	4.8	0.3	
009	9	325	7.2	0.45	
012	12	575	9.6	0.6	
015	15	900	12.0	0.75	
024	24	2,310	19.2	1.2	

Note: All values in the tables are valid for 20° C and zero contact current.

* Specified operate values are valid for pulse wave voltage.

! Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.


■ SAFETY STANDARDS

Type	Compliance	Contact Rating
UL	UL508 File No. E63614	Flammability: UL94-V0 (Plastics)
CSA	C22.2 No. 14 File No. LR40304	5A, 30 VDC/250VAC (resistive) 1/6 HP, 125VAC 1/2 HP, 250VAC TV-5, 120 VAC Pilot duty: C300
VDE	IEC/EN61810-1 EN60065 clause 14.6.1	5A, 250VAC ($\cos\phi$ 1) 2A, 250VAC ($\cos\phi$ 0.4) 5A, 30VDC (0ms)
CQC	GB/T21711.1, GB15092.1 03001008809	5A 250VAC


FTR-F2 Series

■ DIMENSIONS


- Dimensions

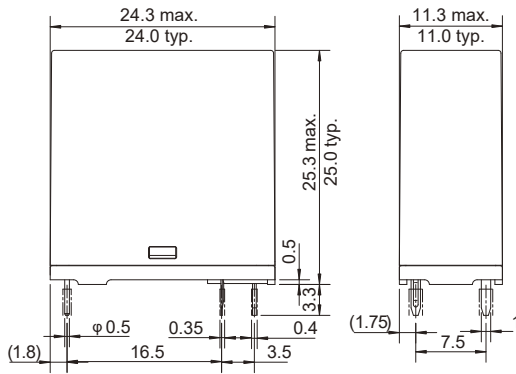

- Schematics
(Bottom view)



- PC board mounting
hole layout (Bottom view)

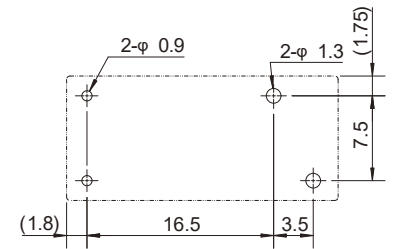

Notes: Dimensions of the terminals do not include thickness of pre-solder.

Tolerance of PC board mounting hole layout: ± 0.1 unless otherwise specified.

Unit:mm


(): Reference

FTR-F2 Series


■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line)


Coil temperature rise

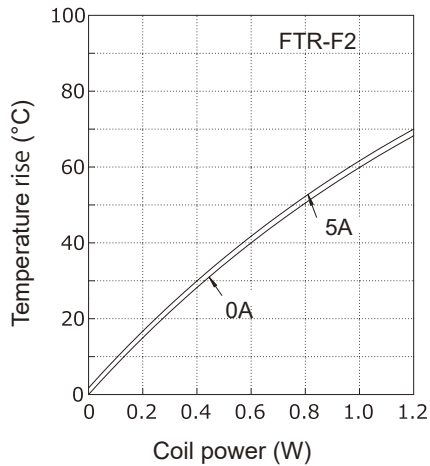


Operating range

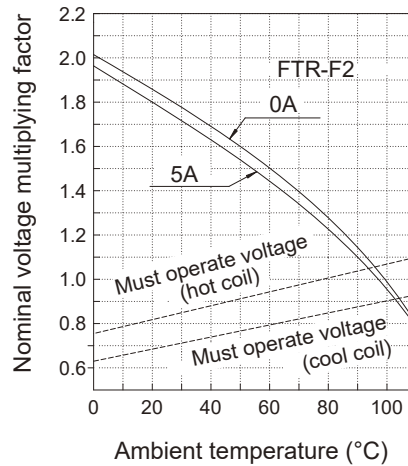


Maximum switching power

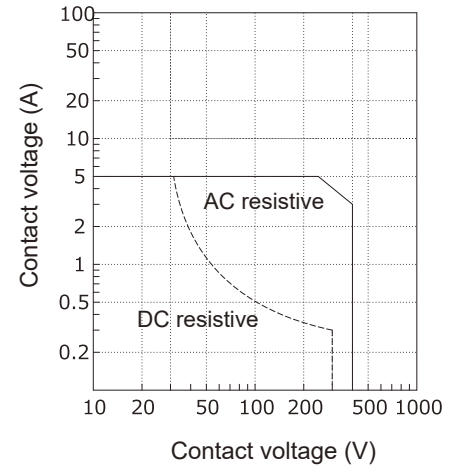


Life curve

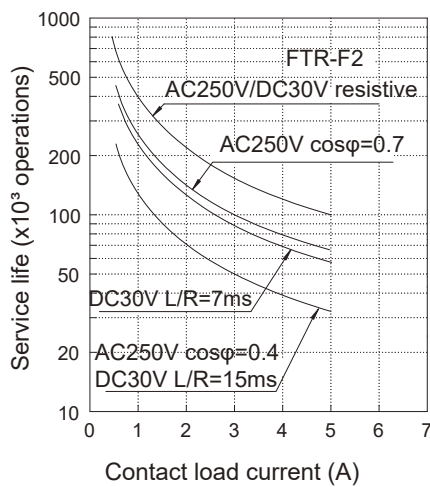

Distribution of operate/release voltage

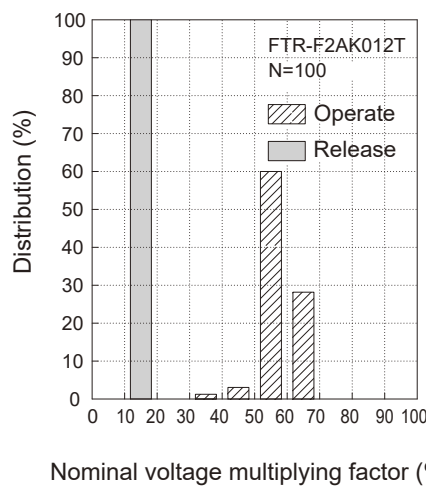

Distribution of contact resistance

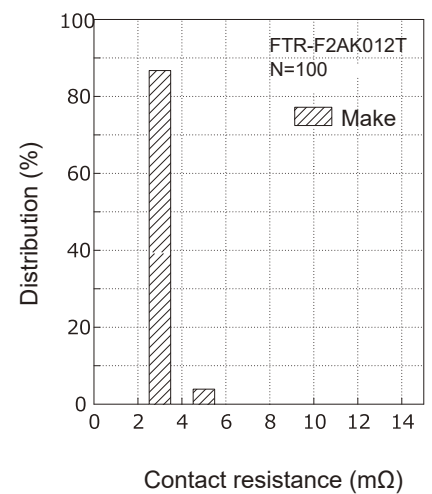

FTR-F2 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan
FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

Asia Pacific
FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

North and South America
FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

China
FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Europe
FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk. FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
