

POWER RELAY

1 POLE – 5A, TV-3 / TV-5 Type Relay

FTR-F3 Series

■ FEATURES

- High inrush 51A/78A, TV rating capability
- Flat and slim power relays
 - Flat type (right angle type): height: 7mm
 - Mounting space: 330mm²
 - Slim type (standard type)
 - Width: 7mm
 - Mounting space: 142mm²
- High inrush current contacts
- High insulation
 - Insulation distance: minimum 6mm between coil and contacts (conforms to IEC 60065)
 - Dielectric strength: 4KV
 - Surge strength: 10KV
- Cadmium free contact for eco-program
- Safety standards: UL, CSA, VDE, CQC
- Plastic sealed relay, RTIII
- RoHS compliant



■ PARTNUMBER INFORMATION

[Example] FTR-F3 P A 012 V
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-F3	: FTR-F3 Series
(b)	Contact configuration	A P	: 1 form A, slim type : 1 form A, flat type
(c)	Coil type (power)	A	: 280mW
(d)	Coil rated voltage	012	: 3...24VDC See coil rating table
(e)	Contact material	V T	: AgSnO ₂ , TV-5 type : AgSnO ₂ , TV-3 type

Actual marking does not carry the type name: "FTR"

E.g.: Ordering code: FTR-F3PA012V Actual marking: F3PA012V

FTR-F3 Series

■ SPECIFICATIONS

Item		FTR-F3(A;P)A(...)V	FTR-F3(A;P)A(...)T	Remarks/conditions	
Contact data	Configuration	1 form A (SPST)			
	Construction	Single			
	Material	T and V: AgSnO ₂			
	Resistance	Max. 100mΩ		Initial at 1A, 6VDC	
	Contact rating	5A, 250VAC, 30VDC		Resistive	
	Max. inrush current	78A, 250VAC (TV-5)	51A, 250VAC (TV-3)		
	Max. carrying current	5A			
	Max. switching voltage	277VAC, 30VDC			
	Max. switching power	1,250VA, 150W			
	Min. switching load* ¹	10 mA, 5VDC			
Coil data	Rated power (20°C)	280mW			
	Operating temperature range	-40°C ~ +85°C (at rated voltage)		No frost	
Timing data	Operate	Max. 10ms		without bounce, no diode	
	Release	Max. 10ms		without bounce, no diode	
Life	Mechanical	Min. 5 x 10 ⁶ operations			
	Electrical (resistive)	Min. 100 x 10 ³ operations (3A, 250VAC/30VDC) Min. 50 x 10 ³ operations (5A, 250VAC/30VDC)		At raged load	
	Electrical (lamp)	Min. 25 x 10 ³ ops. (UL TV-5)	Min. 25 x 10 ³ ops. (UL TV-3)		
Insulation	Insulation resistance	Min. 1000MΩ at 500VDC			
	Dielectric strength	Open contacts	750VAC (50/60Hz), 1 minute		
		Coil to contacts	4,000VAC (50/60Hz), 1 minute		
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave		
	Clearance / Creepage	6mm / 6mm			
	Insulation (IEC/EN618 10-1)	Voltage	250V		
Pollution		2			
Material group		III			
Others	Vibration resistance	Misoperation ≥ 1μs	10Hz ~ 55Hz ~ 10Hz single amplitude 0.75mm		Direction X, Y, Z, contact ON/OFF total 6 cycles
		Endurance	10Hz ~ 55Hz ~ 10Hz single amplitude 0.75mm		Direction X, Y, Z, contact OFF total 6 hours
	Shock resistance	Misoperation ≥ 1μs	Min. 100m/s ² (11 ± 1ms)		Direction X, Y, Z, contact ON/OFF total 36 times
		Endurance	Min. 1,000m/s ² (6 ± 1ms)		Direction X, Y, Z, contact OFF total 18 times
	Dimensions / weight	Slim type: 7.0 x 20.3 x 15.0 mm Flat type: 15.0 x 20.3 x 7.0 mm / approx. 6g			
	Sealing	Plastic sealed RTIII			

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions.

FTR-F3 Series

■ COIL DATA

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance $\pm 10\%$ (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
003	3	32.1	2.25	0.3	280
005	5	90	3.75	0.5	
006	6	130	4.5	0.6	
009	9	290	6.75	0.9	
012	12	515	9	1.2	
018	18	1,160	13.5	1.8	
024	24	2,060	18	2.4	

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

*: Specified operated values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

■ SAFETY STANDARDS


Type	Compliance	Contact Rating
UL	UL508 File No. E63614	Flammability: UL94-V0 (Plastics)
CSA	C22.2 No. 14 File No. LR40304	FTR-F3PA(...)V, FTR-F3AA(...)V 3A, 250VAC / 30VDC resistive 5A, 250VAC / 30VDC resistive TV-5, 120VAC FTR-F3PA(...)T, FTR-F3AA(...)T 3A, 250VAC/30VDC resistive 5A, 250VAC/30VDC resistive TV-3, 120VAC
VDE	IEC/EN61810-1 EN60065 clause 14.6.1	FTR-F3PA(...)V, FTR-F3AA(...)V 3A, 250 VAC, $\cos\phi = 1$ 5A, 250 VAC, $\cos\phi = 1$ 3A, 30VDC (L/R=0ms) 5A, 30VDC (L/R=0ms) FTR-F3PA(...)T, FTR-F3AA(...)T 3A, 250 VAC, $\cos\phi = 1$ 5A, 250 VAC, $\cos\phi = 1$ 3A, 30VDC (L/R=0ms) 5A, 30VDC (L/R=0ms)
CQC	GB15092.1 / GB/T21711.1 File No. 10002049449, 17002164382	5A 250VAC / 30VDC

FTR-F3 Series


■ DIMENSIONS

Standard type - FTR-F3AA(...)(V, T)


Dimensions

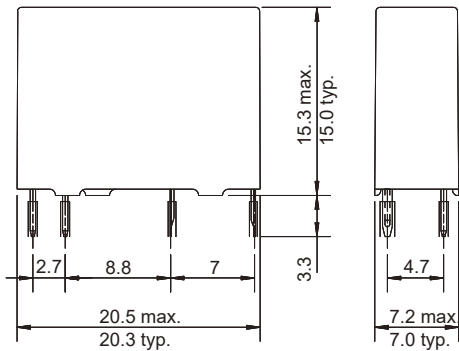


Schematics
(BOTTOM VIEW)




PC board mounting hole layout
(BOTTOM VIEW)

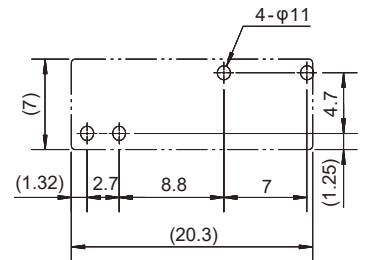


Right angle type - FTR-F3PA(...)(V, T)

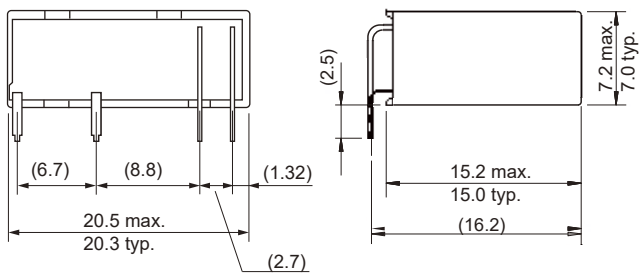

Schematics
(BOTTOM VIEW)



PC board mounting hole layout
(BOTTOM VIEW)



Dimensions of the terminals do not include thickness of pre-solder.

Tolerance of PC board mounting hole layout : ± 0.1 unless otherwise specified.


Unit: mm
(): Reference

FTR-F3 Series


CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line)


Coil temperature rise

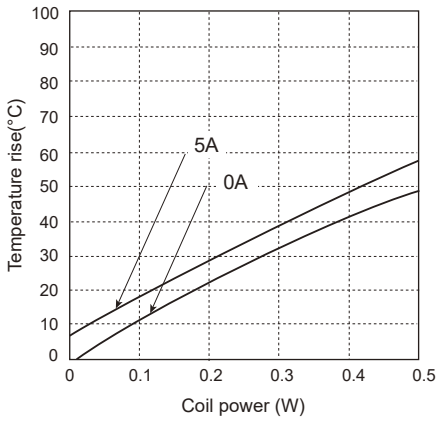


Operating range

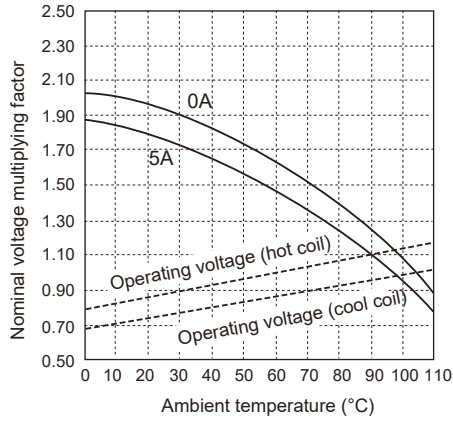


Maximum switching power

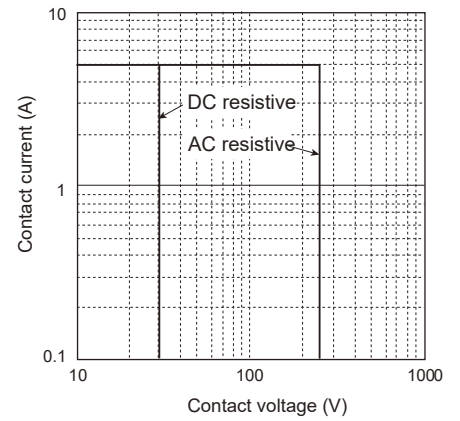


Life curve

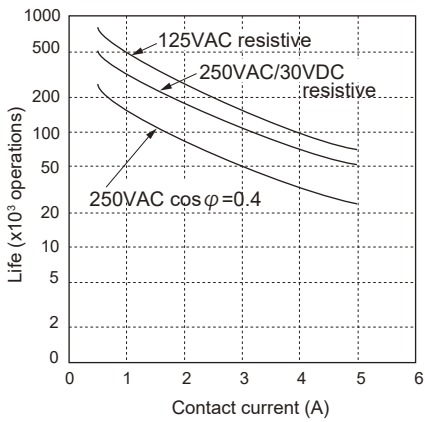

Distribution of operate/release voltage (pulse)

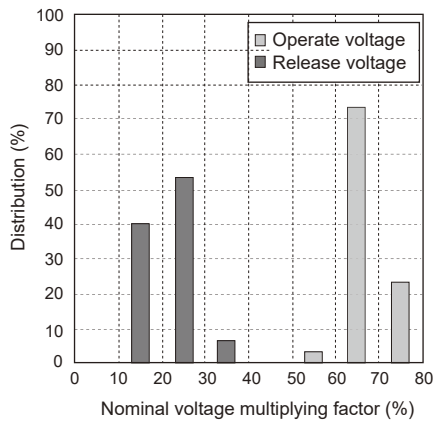

Distribution of contact resistance (at 1A 6VDC)

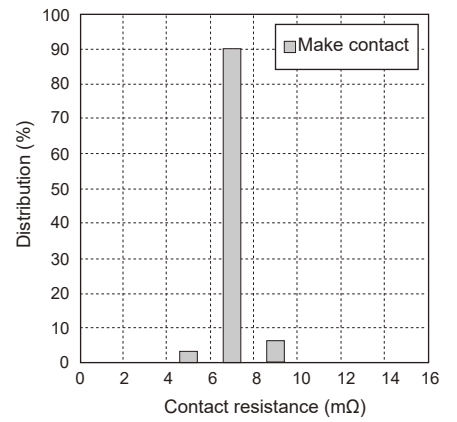

FTR-F3 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
